


# HAND HYGIENE SINK

HWSS2321W-00 | 2030032233

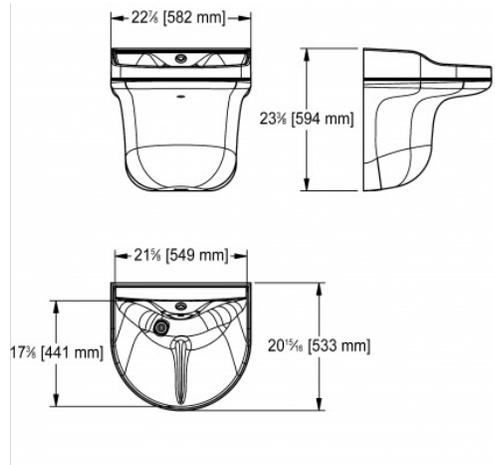

White solid surface hand hygiene sink with removable shroud. Left rear 1 1/2" (DN 40) waste location to prevent water from splashing directly into the waste. An anti-splash feature runs through the centre of the sink to greatly reduce splashing. Infra-red controls trigger an illuminated crystal clear true laminar flow water stream delivering water with dissolved ozone and other mixed oxidants on demand. Flow rate is 5l (1.32gal)/min. Ozonated water has been proven as a safe and extremely effective way to help sanitize the sink and the waste and improve the efficiency of hand washing (even if a user does not use soap).

Other control features include; a post-wash cycle of 3 seconds to wash soap residue and bacteria down the sink. A daily purge cycle prevents water from stagnating in the drain lines and traps, ensuring continuous waste disinfection. Recommended for areas with normal water conductivity in range of 75-350 TDS. If unaware of your local water conductivity, please contact customer service and this can easily be determined for you. Recommended water temperature is between 27-35°C. Hand hygiene sinks are specifically designed for hand washing only. They are not recommended as a drinking source, for washing utensils or for draining of medical bags or bedpans.

Medi-flo is cUPC certified and is compliant with CSAB45.5-11/IAPMO Z124-2011 and IGC156-2012el. Meets and exceeds various national healthcare standards; ie, CSAZ8000. Wheelchair accessible: meets ADA, ANSI A117.1 and CSA B651-04. Patent Pending.

An optional handheld programmer (AC01-005) enables hand-hygiene data logging and parameter adjustments such as sensor range and ozone run times. A plug-in transformer required for generation of mixed oxidants is included. Our pre-set thermostatic mixing valve is also available as part number MEDI-MIX. Franke's in-wall carrier (IWC2104) is also available for quicker installation.

## TECHNICAL DATA

gross weight	24.94 kg
Bowl finish	high polished
material	synthetic
material code	Miranit
overflow	no
type of mounting	wall mounting
type of waste kit	domed waste
Waste hole position	Left back corner
waste kit included	yes
bowl depth	9 3/4"
Bowl front to back	17 3/8"
Bowl left to right	21 5/8"
overall depth (front-back)	21"
overall height	23 3/8"
overall width (left-right)	23"

## PROJECT INFORMATION

Item Location \_\_\_\_\_  
 Project Number \_\_\_\_\_  
 Quote Number \_\_\_\_\_  
 Notes \_\_\_\_\_

Engineer's Approval

surface finish	high polished
Wheelchair compliant	Yes