

Devices heights:

with feet 7 mm (Option):
Height 698 + 7 = 705*

with feet 40 mm (Standard - Supplied):
Height 698 + 46 = 744*

Adjustable feet 70 mm (Option):
Height 698 + 71 = 769* (to 779*)

Adjustable feet 100 mm (Option):
Height 698 + 100 = 798* (to 808*)

*With the optional bean container 2x 1200 g
or 1x 2000g the device ist 52 mm higher

Technical data:

(A) A400: 220-240 VAC, 1L N PE, 2400-2800 W, 50-60 Hz, 16 A - EU
 (Net weight 38 kg) 220-240 VAC, 1L N PE, 2100-2300 W, 50 Hz, 10 A - CH/GB/EU
 200-220 VAC, 2L PE, 4500-5300 W, 60 Hz, 30 A - USA
 200 VAC, 2L PE, 2300 W, 50-60 Hz, 16 A - JP
 220 VAC, 1L N PE, 2600 W, 50 Hz, 16 A - CN

Fresh water: Mains water connection, inlet hose Di8 x 1500 mm; G3/8" union nut
and / or:
 Internal water tank, 4,0 litres (monitored)

Waste water: Drip tray with drain hose Di20 x 2000 mm
Alternatively:
 Drip tray removable, capacity 3,0 litres (monitored)

FRANKE Franke Kaffeemaschinen AG Franke-Strasse 9 CH-4663 Aarburg Telefon: +41 62 787 3607 E-Mail: kmch@franke.com Internet: www.franke.com	Unit	Scale	Description				
	mm	NTS	TD_A400NM_en				
	Drawn	MB002	06.09.2017				
	Modified	MB002	06.09.2017				
Checked							
ECN	500000001512	Document ID - Version		Revision	Status	Sheet / Sheets	Format
Article Number		20104653-01			15	1 / 2	A3

These drawings and specifications are the property of Franke Technology and Trademark Ltd. and shall not be reproduced, copied or transferred to any third party without the prior written permission of Franke Technology and Trademark Ltd., Hergiswil, Switzerland

Installation notes on site:



WW1: Option waste water - DN50 funnel trap ventilated - A400 (A)
for drainage hose

FW1: Option mains water connection G3/8A external thread - A400 (A)
Check valve, filter and aquastop - recommendation
Water pressure 80-800 kPa (0,8-8,0 bar)
Flow rate: >0,1l/sec. - Water temperatur <25°C
Water hardness: 4-8°dH; 7-14fH; 70-140ppm (mg/l)
Carbon hardness: 3-6°dH; 50-105ppm (mg/l) - pH-value: 6,5-7,5
Chlorine content: <0,5mg/l - Chloride content: <30mg/l
Elektrical conductivity: 50-200µs/cm - Iron content: <0,3mg/l

E1: Soket with RCD (residual current device) - A400 (A)
220-240 VAC, 1LNPE, 2400-2800 W, 50-60 HZ, 16 A - EU
220-240 VAC, 1LNPE, 2100-2300 W, 50 HZ, 10 A - CH/GB/EU
200-220 VAC, 2L PE, 4500-5300 W, 60 HZ, 30 A - USA
200 VAC, 2L PE, 2300 W, 50-60 HZ, 16 A - JP
220 VAC, 1LNPE, 2600 W, 50 HZ, 16 A - China

CC1: Option container for coffee-grounds ejection - A400 (A)

WF1: Option water filter - A400 (A)

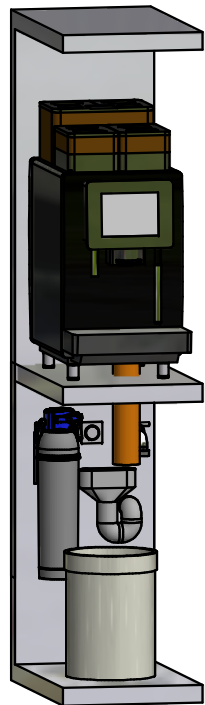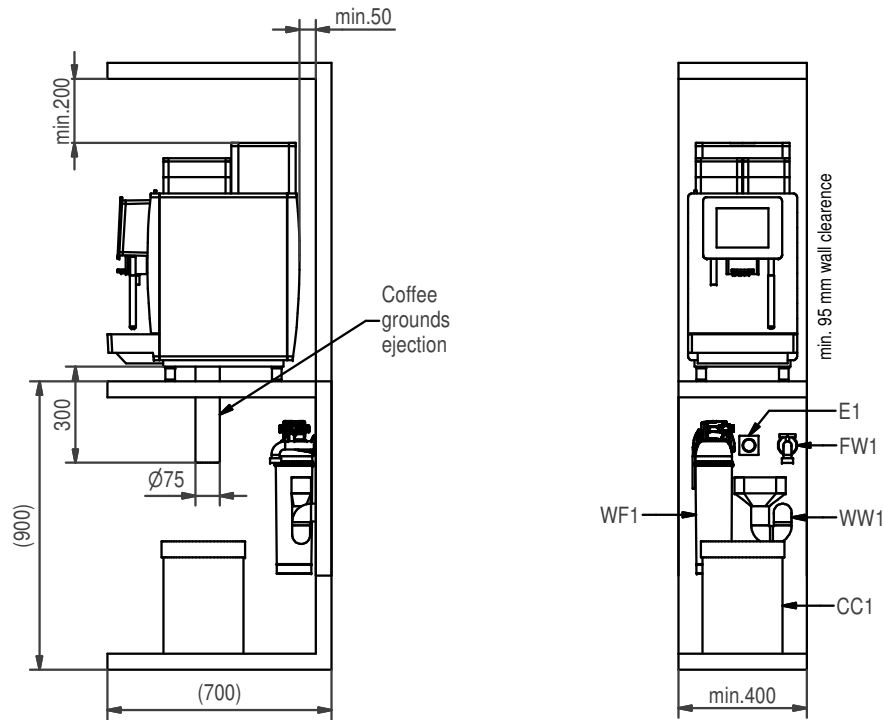


Installation requirements:

Our delivered appliances are ready for operation. They have to be installed on a flat surface. First the preparations for the connections of water and electricity must be complete. Distance max. 1 m up to the device. This preparation-works must be performed by qualified specialists in accordance with applicable regulations. The coffee machine is intended exclusively for operation in interior rooms.
Ambient temperatur: 5°C - 32°C.
Humidity: max. 80%

Positions:

- Pos. 1) 1x Drilling
 - Supply lines - A400 (A)
- Pos. 2) 1x Drilling (Option)
 - Coffee-grounds ejection - A400 (A)
- Pos. 3) 4x Surface
 - Equipment feet - A400 (A)

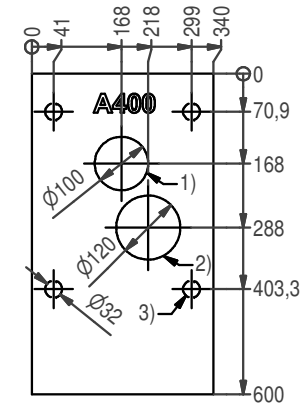

FRANKE Franke Kaffeemaschinen AG Franke-Strasse 9 CH-4663 Aarburg Telefon: +41 62 787 3607 E-Mail: kmch@franke.com Internet: www.franke.com	Unit	Scale	Description						
	mm	NTS	TD_A400NM_en						
	Drawn	MB002	06.09.2017						
	Modified	MB002	06.09.2017						
Checked			ECN	500000001512	Document ID - Version	Revision	Status	Sheet / Sheets	Format
<small>These drawings and specifications are the property of Franke Technology and Trademark Ltd. and shall not be reproduced, copied or transferred to any third party without the prior written permission of Franke Technology and Trademark Ltd., Heggen, Switzerland</small>		Article Number		20104653-01		15		2 / 2	
								A3	