

FRANKE



COMMERCIAL
2026 • 2027

COMMERCIAL 2026 • 2027

Pricing Effective January 1, 2026

PRODUCT CATEGORIES

- 02 Stainless steel sinks
- 12 Type 316 laboratory sinks
- 20 Utility & scullery
- 38 Vanity basins
- 44 Healthcare
- 57 Hand wash basins
- 66 Washroom accessories
- 72 Drinking fountains
- 92 Waste fittings
- 96 High security
- 98 Custom solutions

- 100 Faucet hole drilling diagrams
- 101 Care & maintenance
- 103 Corrosion resistance information

- 104 Index
- 106 Terms & conditions
- 107 Warranty





Stainless Steel Sinks



Guaranteed to maintain their functionality over time, Franke Commercial stainless steel sinks remain brilliant and easy to clean. Stainless steel is the material of choice for commercial environments where durability, hygiene, and functionality matter most.

Franke Commercial stainless steel sinks have been engineered for quick and easy installation.

Our patented EZ Torque™ fasteners mean a Franke sink will **install five times faster** than the competition. One-handed drop and drill installation: fasteners come pre-installed on the sink meaning you can simply drop the sink into the countertop and use a drill to tighten the fasteners.

Factory applied rimseal simplifies installation. No need for silicone for the sink rim eliminates a messy step from the install process.



EZ Torque™ fasteners

Install a Franke Commercial topmount sink in two easy steps: drop and drill. Bright red EZ Torque™ fasteners are easy to spot and can be tightened with a drill in seconds.



Satin finish

A #4 satin finished bowl and deck allows scratches to be blended into the grain line. An ideal finish for commercial applications.



Rimseal pre-installed


Installing a Franke Commercial topmount sinks is quick and easy. A factory-applied Rimseal means fewer installation steps and less mess.



Waste fitting included

Most Franke Commercial sinks are sold with a stainless steel waste kit included in the box. These high quality waste assemblies are also available separately.

Single bowl topmount no faucet ledge, 20 gauge

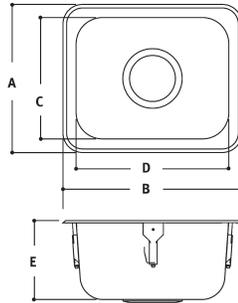

Single compartment self rimming topmount sink, 20 gauge (0.9 mm), type 301 (CNS 18/8) stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Certified to ASME A112.19.3/CSA B45.4.

Model S6808-1 shown



Accessibility	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
	S6408-1	18 1/8" (460 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	20	\$ 452
	S6808-1	18 1/8" (460 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	20	\$ 469
	S6810-1	18 1/8" (460 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	C	20	\$ 803

Single bowl topmount no faucet ledge, 18 gauge



Single bowl without faucet ledge, 18 gauge S6410PCB-1

Single compartment self rimming topmount sink without faucet ledge, 18 gauge (1.2mm), type 304 (CNS 18/10) stainless steel.

Polished #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.


Outside dimensions **18 1/8" x 16 1/8"**

Inside bowl **16 x 14 x 10"**


Waste location **Center back**

Minimum cabinet size **24"**

\$ 803

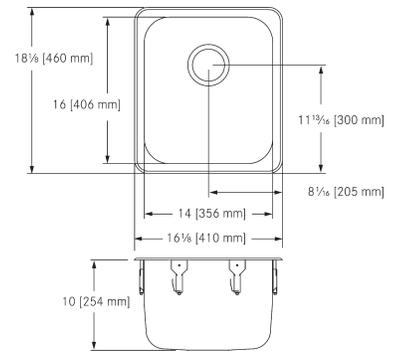

Single bowl topmount with faucet ledge, 20 gauge

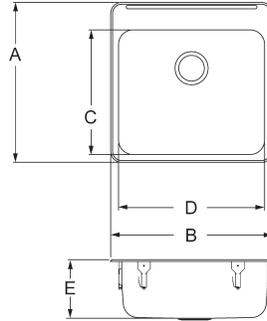

Single compartment self rimming topmount sink with faucet ledge, 20 gauge (0.9 mm), type 301 (CNS 18/8) stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece.

Certified to ASME A112.19.3/CSA B45.4.

Faucet hole options (add to part number when ordering):

- 1 1 hole, centered
- 2 2 hole, 4" spread
- 3 3 hole, 8" spread

Model LBS6808-1 shown



♿	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	LBS9106-1	13 3/4" (349 mm)	13 5/8" (346 mm)	9 1/4" (235 mm)	11 5/8" (295 mm)	6" (152 mm)	C	1,2	\$ 363
•	LBS1306-1	15 7/16" (392 mm)	15 1/8" (384 mm)	11" (279 mm)	13" (330 mm)	6" (152 mm)	C	1,2	\$ 424
	LBS2708-1	17" (432 mm)	19 1/8" (486 mm)	12" (305 mm)	17" (432 mm)	8" (203 mm)	C	1,3	\$ 515
	LBS4607-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	7" (178 mm)	C	1,3	\$ 619
•	ALBS6805-1	20 9/16" (522 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	5" (127 mm)	LR	1,3	\$ 575
	LBS6807-1	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	7" (178 mm)	CB	1,3	\$ 378
	LBS6807-2	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	7" (178 mm)	CB	1,3	\$ 428
	LBS6808-1	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	1,3	\$ 482
	LBS6808-2	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	1,3	\$ 525
	LBS6810-1	20 9/16" (522 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	C	1,3	\$ 832
	LBS7508-1	22" (559 mm)	17 1/4" (438 mm)	17" (432 mm)	15" (381 mm)	8" (203 mm)	CB	1,3	\$ 590
	LBS7308-1	22 1/16" (560 mm)	25 5/8" (651 mm)	17" (432 mm)	23" (584 mm)	8" (203 mm)	CB	1,3	\$ 771


Models ending in -1: 3 1/2" stainless steel crumb cup strainer assembly with 1 1/2" tailpiece included

Models ending in -2 have overflow: 3 1/2" stainless steel crumb cup strainer assembly with overflow and 1 1/2" tailpiece included



Scan for price

Single bowl topmount with faucet ledge, 18 gauge

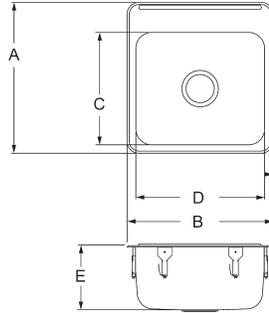

Model LBS4608P-1 shown



Single compartment self rimming topmount sink, 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Certified to ASME A112.19.3/CSA B45.4

Faucet hole options (add to part number when ordering):


- 1 1 hole, centered
- 2 2 hole, 4" spread
- 3 3 hole, 8" spread

Accessibility	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	ALBS1306P-1	15 7/16" (392 mm)	15 1/8" (384 mm)	11" (279 mm)	13" (330 mm)	6" (152 mm)	C	1,2	\$ 569
	LBS1308P-1	15 7/16" (392 mm)	15 1/8" (384 mm)	11" (279 mm)	13" (330 mm)	8" (203 mm)	C	1,2	\$ 797
•	ALBS2706P-1	17" (432 mm)	19 1/8" (486 mm)	12" (305 mm)	17" (432 mm)	6" (152 mm)	C	1,3	\$ 884
	LBS2708P-1	17" (432 mm)	19 1/8" (486 mm)	12" (305 mm)	17" (432 mm)	8" (203 mm)	C	1,3	\$ 898
•	ALBS4406P-1	18 13/16" (478 mm)	16 1/8" (410 mm)	14" (356 mm)	14" (356 mm)	6" (152 mm)	CB	1,3	\$ 842
	LBS4408P-1	18 13/16" (478 mm)	16 1/8" (410 mm)	14" (356 mm)	14" (356 mm)	8" (203 mm)	CB	1,3	\$ 863
•	ALBS4605P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	5" (127 mm)	C	1,3	\$ 853
•	ALBS4606P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	6" (152 mm)	C	1,3	\$ 911
	LBS4608P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	8" (203 mm)	C	1,3	\$ 674
	LBS4610P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	10" (254 mm)	C	1,3	\$ 929
•	ALBS4006P-1	18 13/16" (478 mm)	22 1/8" (562 mm)	14" (356 mm)	20" (508 mm)	6" (152 mm)	CB	1,3	\$ 951
	LBS4008P-1	18 13/16" (478 mm)	22 1/8" (562 mm)	14" (356 mm)	20" (508 mm)	8" (203 mm)	CB	1,3	\$ 969
	LBS4010P-1	18 13/16" (478 mm)	22 1/8" (562 mm)	14" (356 mm)	20" (508 mm)	10" (254 mm)	CB	1,3	\$ 1,283
•	ALBS6406P-1	20 9/16" (522 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	6" (152 mm)	CB	1,3	\$ 943
	LBS6408P-1	20 9/16" (522 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1,3	\$ 713
	LBS6410PCB-1	20 9/16" (522 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	10" (254 mm)	CB	1,3	\$ 912
•	ALBS6805P-1	20 9/16" (522 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	5" (127 mm)	LR	1,3	\$ 924
•	ALBS6806P-1	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	6" (152 mm)	CB	1,3	\$ 943
	LBS6808P-1	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	1,3	\$ 579
	LBS6810P-1	20 9/16" (521 mm)	20 1/8" (508 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	C	1,3	\$ 952
•	ALBS6106P-1	20 13/16" (529 mm)	23 1/8" (587 mm)	16" (406 mm)	21" (533 mm)	6" (152 mm)	CB	1,3	\$ 1,072
	LBS6108P-1	20 13/16" (529 mm)	23 1/8" (587 mm)	16" (406 mm)	21" (533 mm)	8" (203 mm)	CB	1,3	\$ 1,054
	LBS6110P-1	20 13/16" (529 mm)	23 1/8" (587 mm)	16" (406 mm)	21" (533 mm)	10" (254 mm)	CB	1,3	\$ 1,331
•	ALBS7506P-1	22" (559 mm)	17 1/4" (438 mm)	17" (432 mm)	15" (381 mm)	6" (152 mm)	CB	1,3	\$ 875
	LBS7508P-1	22" (559 mm)	17 1/4" (438 mm)	17" (432 mm)	15" (381 mm)	8" (203 mm)	CB	1,3	\$ 894
•	ALBS7306P-1	22 1/16" (560 mm)	25 5/8" (651 mm)	17" (432 mm)	23" (584 mm)	6" (152 mm)	CB	1,3	\$ 1,072
	LBS7308P-1	22 1/16" (560 mm)	25 5/8" (651 mm)	17" (432 mm)	23" (584 mm)	8" (203 mm)	CB	1,3	\$ 1,093
	LBS7310P-1	22 1/16" (560 mm)	25 5/8" (651 mm)	17" (432 mm)	23" (584 mm)	10" (254 mm)	CB	1,3	\$ 1,404
	LBS7312P-1	22 1/16" (560 mm)	25 5/8" (651 mm)	17 1/2" (445 mm)	23 1/2" (597 mm)	12" (305 mm)	C	1,3	\$ 1,615
	LBS7314P-1	22 9/16" (573 mm)	25 5/8" (651 mm)	17 1/2" (445 mm)	23 1/2" (597 mm)	14" (356 mm)	C	1,3	\$ 3,130
•	ALBS7806P-1	22" (559 mm)	30 1/8" (765 mm)	17" (432 mm)	28" (711 mm)	6" (152 mm)	CB	1,3	\$ 1,291
	LBS7808P-1	22" (559 mm)	30 1/8" (765 mm)	17" (432 mm)	28" (711 mm)	8" (203 mm)	CB	1,3	\$ 1,307

Double bowl topmount with faucet ledge, 20 gauge



Model LBD6408-1 shown

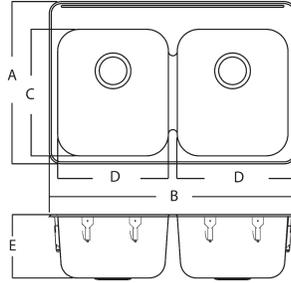

Double compartment self rimming topmount, 20 gauge (0.9 mm), type 301 (CNS 18/8) stainless steel. #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4

Faucet hole options (add to part number when ordering):

- 1 1 hole, centered over partition
- 3 3 hole, 8" spread, centered over partition




♿	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	ALBD6405-1	20 1/2" (521 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	5" (127 mm)	LR, RR	1, 3	\$ 815
	LBD6407-1	20 1/2" (521 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	7" (178 mm)	CB	1, 3	\$ 651
	LBD6408-1	20 1/2" (521 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1, 3	\$ 784
	LBD7508-1	22" (559 mm)	33 1/4" (845 mm)	17" (432 mm)	15" (381 mm)	8" (203 mm)	CB	1, 3	\$ 1,072

Double bowl topmount with faucet ledge, 18 gauge



Model LBD7508P-1 shown

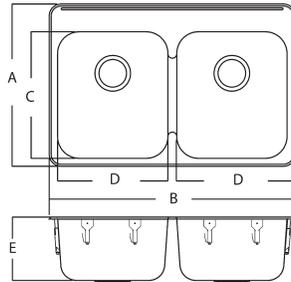

Double compartment self rimming topmount sink, 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4

Faucet hole options (add to part number when ordering):

- 1 1 hole, centered over partition
- 2 2 hole, 8" spread
- 3 3 hole, 8" spread, centered over partition



♿	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	ALBDC182605P-1	18 1/4" (464 mm)	26 5/8" (677 mm)	16" (406 mm)	14" (356 mm)	6" (153 mm)	CB	2	\$ 1,446
•	ALBD4405P-1	18 13/16" (478 mm)	31 1/4" (794 mm)	14" (356 mm)	14" (356 mm)	5" (127 mm)	CB	1, 3	\$ 1,337
•	ALBD4406P-1	18 13/16" (478 mm)	31 1/4" (794 mm)	14" (356 mm)	14" (356 mm)	6" (152 mm)	CB	1, 3	\$ 1,356
	LBD4408P-1	18 13/16" (478 mm)	31 1/4" (794 mm)	14" (356 mm)	14" (356 mm)	8" (203 mm)	CB	1, 3	\$ 1,377
•	ALBD6405P-1	20 1/2" (521 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	5" (127 mm)	RC	1, 3	\$ 1,087
•	ALBD6406P-1	20 1/2" (520 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	6" (152 mm)	CB	1, 3	\$ 1,104
	LBD6408P-1	20 1/2" (520 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1, 3	\$ 1,121
	LBD6410PCB-1	20 13/16" (529 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	10" (254 mm)	CB	1, 3	\$ 1,611
•	ALBD7506P-1	22" (559 mm)	33 1/4" (845 mm)	17" (432 mm)	15" (381 mm)	6" (152 mm)	CB	1, 3	\$ 1,544
	LBD7508P-1	22" (559 mm)	33 1/4" (845 mm)	17" (432 mm)	15" (381 mm)	8" (203 mm)	CB	1, 3	\$ 1,568
	LBD7510P-1	22" (559 mm)	33 1/4" (845 mm)	17" (432 mm)	15" (381 mm)	10" (254 mm)	CB	1, 3	\$ 2,079



Scan for price

Triple bowl topmount with faucet ledge



Triple bowl with faucet ledge, 20 gauge

LBT6407CB-1

Triple compartment self rimming topmount sink with faucet ledge, 20 gauge (0.9mm), type 301 (CNS 18/8) stainless steel.

Polished #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.


Outside dimensions **20 9/16" x 46 3/8"**

Inside bowl **16 x 14 x 7"**

Waste location **Center back**

Custom cabinet required

\$1,624

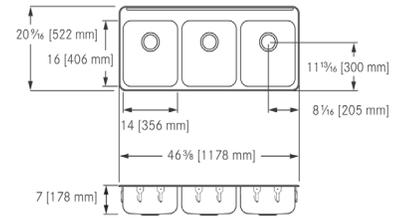

Triple bowl with faucet ledge, 18 gauge

LBT6410PCB-1

Triple compartment self rimming topmount sink with faucet ledge, 18 gauge (1.2mm), type 304 (CNS 18/10) stainless steel.

Polished #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.


Outside dimensions **20 9/16" x 46 3/8"**

Inside bowl **16 x 14 x 10"**

Waste location **Center back**

Custom cabinet required

\$2,927

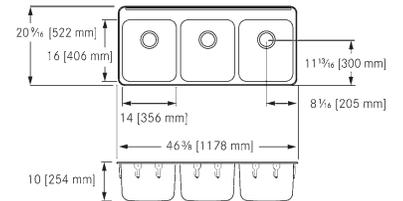

Triple bowl with faucet ledge, 18 gauge

LBT8610P-1

Triple compartment self rimming topmount sink with faucet ledge, 18 gauge (1.2mm), type 304 (CNS 18/10) stainless steel.

Polished #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.


Outside dimensions **22 9/16" x 52 3/8"**

Inside bowl **18 x 16 x 10"**


Waste location **Center back**

Custom cabinet required

\$3,472

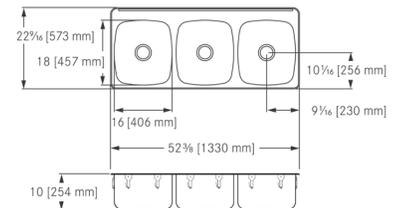

Single bowl topmount drainboard, 18 gauge

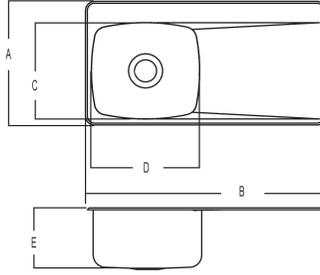

Model LBSDBR6810P-1 shown




Single compartment self rimming topmount sink with faucet ledge and drainboard. Drainboard slopes toward bowl. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Includes factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.

Faucet hole options (add to part number when ordering):
-1 1 hole, centered
-3 3 hole, 8" spread

♿	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
	LBSDBL6408P-1	20 5/8" (524 mm)	36" (914 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1,3	\$ 3,593
	LBSDBR6408P-1	20 5/8" (524 mm)	36" (914 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1,3	\$ 3,593
	LBSDBL6810P-1	20 9/16" (522 mm)	40" (1016 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	C	1,3	\$ 3,699
	LBSDBR6810P-1	20 9/16" (522 mm)	40" (1016 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	C	1,3	\$ 3,699

Double bowl topmount drainboard, 18 gauge

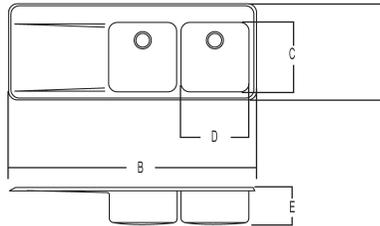

Model LBDDBR6408P-1 shown

Double compartment self rimming topmount sink with faucet ledge and drainboard. Drainboard slopes toward bowl. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Includes waste assemblies, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.


Faucet hole options (add to part number when ordering):
-1 1 hole, centered
-3 3 hole, 8" spread

♿	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
	LBDDBL6408P-1	20 1/2" (521 mm)	51" (1295 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1,3	\$ 4,600
	LBDDBR6408P-1	20 1/2" (521 mm)	51" (1295 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1,3	\$ 4,600



Scan for price

Single bowl undermount, 18 gauge

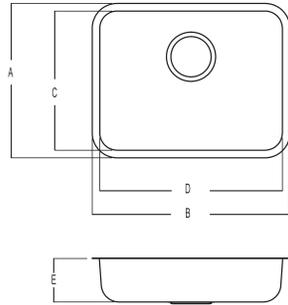

Single compartment undermount sink in 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Template and installation instructions included.


Certified to ASME A112.19.3/CSA B45.4.

Model UCS6808P-1 shown



♿	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	UCS6105P-1	17 3/4" (451 mm)	22 3/4" (346 mm)	16" (406 mm)	21" (533 mm)	5" (127 mm)	CB	18	\$ 815
•	UCS6805P-1	18 1/8" (460 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	5" (127 mm)	LB	18	\$ 807
	UCS6808P-1	18 1/8" (460 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	18	\$ 854

Double bowl undermount, 18 gauge

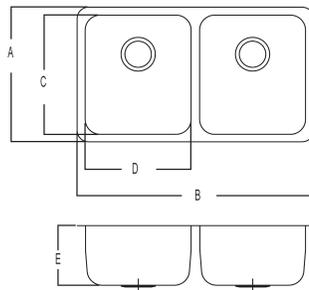

Double compartment undermount sink in 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpieces. Template and installation instructions included.

Certified to ASME A112.19.3/CSA B45.4.

Model UCD6408P-1 shown




♿	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	UCD6405P-1	17 3/4" (451 mm)	30 7/8" (784 mm)	16" (406 mm)	14" (356 mm)	5" (127 mm)	CB	18	\$ 1,042
	UCD6408P-1	17 3/4" (451 mm)	30 7/8" (784 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	18	\$ 1,091



**Looking for more undermount sinks?
Franke Commercial no ledge topmount sinks
can also be undermounted**

Art room sinks, topmount, no ledge, 18 gauge

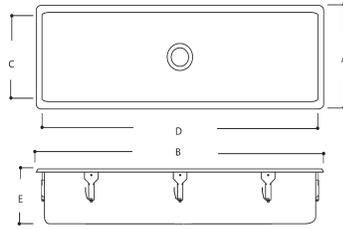

Single compartment self rimming topmount sink in 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finished. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Certified to ASME A112.19.3/CSA B45.4.

Model ART48-1 shown



🦽	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
	ART36-1	19 1/8" (486 mm)	38 1/8" (969 mm)	17" (432 mm)	36" (914 mm)	8" (203 mm)	C	18	\$ 2,367
	ART48-1	19 1/8" (486 mm)	50 1/8" (1273 mm)	17" (432 mm)	48" (1219 mm)	8" (203 mm)	C	18	\$ 2,638
	ART60-1	19 1/8" (486 mm)	62 1/8" (1578 mm)	17" (432 mm)	60" (1524 mm)	8" (203 mm)	C	18	\$ 3,137

Topmount stainless steel sinks engineered for quick and easy installation

Factory installed rimseal


Eliminates the need for silicone



Contractors and installers love the ease of installation of the Franke Rimseal. Simply peel off the backing and the sink is ready to install. No silicone mess.

EZ Torque™ fasteners

Preinstalled on the sink, drop and drill installation

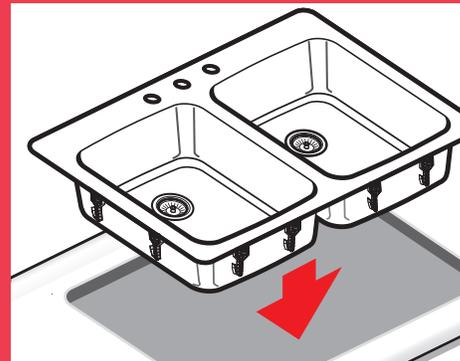

Secure the sink rim to the countertop in two easy steps. Drop the sink into the countertop then tighten with a drill. Clamps are preinstalled to sink, and won't get lost on the job site or left behind in the box.

Type 316 Stainless Sinks



Single bowl topmount no faucet ledge type 316 stainless steel



Topmount single bowl sink, no faucet ledge, T316 S6407-316P-1

Gauge 18


TYPE 316/316L Stainless Steel

Outside dimensions 18 1/8 x 16 1/8"

Inside bowl 16 x 14 x 7"

Waste fitting type 316, 3 1/2" crumb cup waste assembly with T316 tailpiece included

Waste location **Center back**

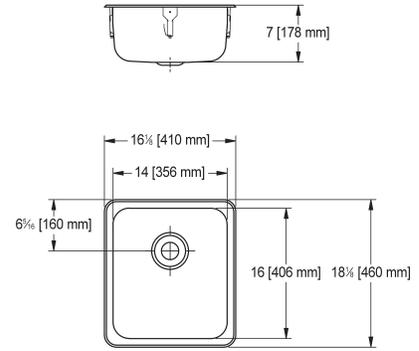

\$1,249



Topmount single bowl sink, no faucet ledge, T316 S6808-316P-1

Gauge 18


TYPE 316/316L Stainless Steel

Outside dimensions 18 1/8 x 20 1/8"

Inside bowl 16 x 18 x 8"

Waste fitting type 316, 3 1/2" crumb cup waste assembly with T316 tailpiece included

Waste location **Center back**

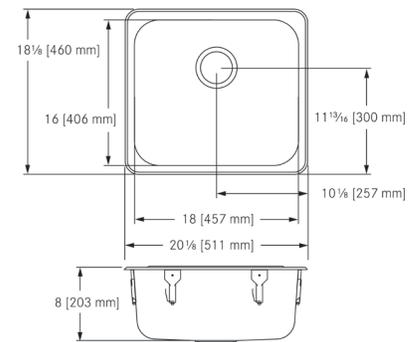

\$1,250



Topmount single bowl sink, no faucet ledge, T316 S6810-316P-1

Gauge 18


TYPE 316/316L Stainless Steel

Outside dimensions 18 1/8 x 20 1/8"

Inside bowl 16 x 18 x 10"


Waste fitting type 316, 3 1/2" crumb cup waste assembly with T316 tailpiece included

Waste location **Center**

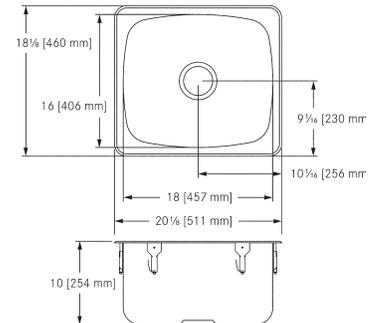

\$1,588

Single bowl topmount with faucet ledge type 316 stainless steel

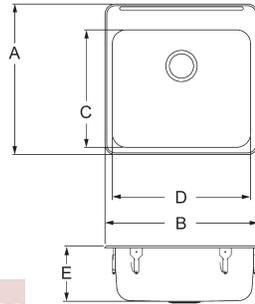

Single compartment self rimming topmount sink with faucet ledge, 18 gauge (1.2 mm), type 316/316L stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes type 316 waste assembly. Certified to ASME A112.19.3-2008 / CSA B45.4-08

Faucet hole options (add to part number when ordering):

- 1 1 hole, centered
- 2 2 hole, 8" spread
- 3 3 hole, 8" spread, centered

Model LBS6808-316P-1 shown




MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
LBS4607-316P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	7" (178 mm)	C	1,3	\$ 1,090
LBS4610-316P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	10" (254 mm)	C	1,2,3	\$ 1,324
LBS6407-316P-1	20 9/16" (522 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	7" (178 mm)	CB	1,3	\$ 1,193
LBS6807-316P-1	20 9/16" (522 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	7" (178 mm)	CB	1,3	\$ 1,179
LBS6808-316P-1	20 9/16" (522 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	1,3	\$ 1,283
LBS6810-316P-1	20 9/16" (522 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	CB	1,3	\$ 1,411

Double bowl topmount type 316 stainless steel



Double bowl with faucet ledge, T316 LBD6408-316P-1

Gauge 18
Type 316/316L Stainless Steel
Outside dimensions 20 1/2" x 31 1/4"
Inside bowl 16" x 14" x 8"
Waste location **Center back**
3 1/2" (89 mm) type 316 waste assemblies included
Minimum cabinet size 36"

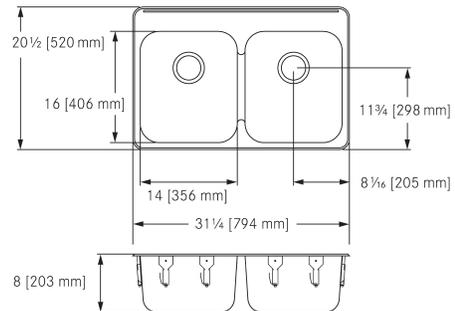


\$ 2,036




Double bowl with faucet ledge, T316 LBD6410-316PCB-1

Gauge 18
Type 316/316L Stainless Steel
Outside dimensions 20 13/16" x 31 1/4"
Inside bowl 16" x 14" x 10"
Waste location **Center back**
3 1/2" (89 mm) type 316 waste assemblies included
Minimum cabinet size 36"

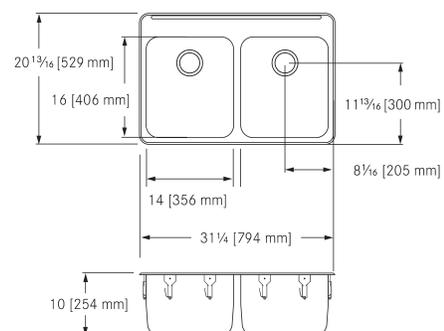

\$ 2,312

Undermount type 316 stainless steel



Model UCS4608-316P-1 shown



Single compartment undermount sink, 18 gauge (1.2 mm), type 316/316L stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Template and installation instructions included. Certified to ASME A112.19.3/CSA B45.4.

🦽	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
	UCS4608-316P-1	16 1/8" (486 mm)	18 1/8" (969 mm)	14" (432 mm)	16" (914 mm)	8" (203 mm)	C	18	\$ 1,163
	UCS6808-316P-1	18 1/8" (486 mm)	16 1/8" (969 mm)	16" (432 mm)	14" (914 mm)	8" (203 mm)	C	18	\$ 1,221
	UCS6810-316P-1	18 1/8" (486 mm)	16 1/8" (1578 mm)	16" (432 mm)	14" (1524 mm)	10" (203 mm)	C	18	\$ 1,382


Single bowl topmount drainboard, type 316



Drainboard left, T316
LBSDBL6810-316P-1
 Gauge **18**
Type 316/316L Stainless Steel
 Outside dimensions **20 9/16 x 40"**
 Inside bowl **16 x 18 x 10"**
 Waste location **Center**
 3 1/2" (89 mm) type 316 crumb cup waste assembly included
 Minimum cabinet size 48"




\$ 4,606

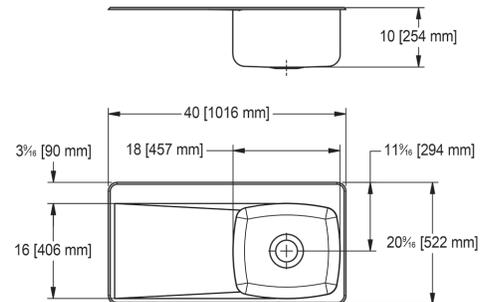


Drainboard right, T316
LBSDBR6810-316P-1
 Gauge **18**
Type 316/316L Stainless Steel
 Outside dimensions **20 9/16 x 40"**
 Inside bowl **16 x 18 x 10"**
 Waste location **Center**
 3 1/2" (89 mm) type 316 crumb cup waste assembly included
 Minimum cabinet size 48"



\$ 4,606

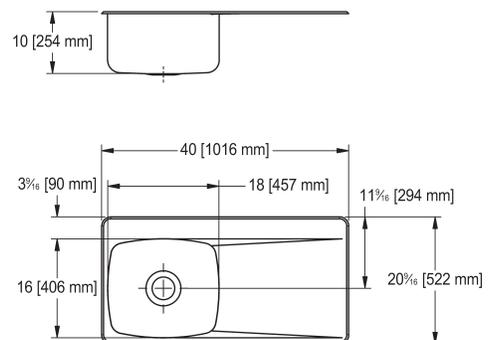

Art room sinks, topmount, no ledge, type 316

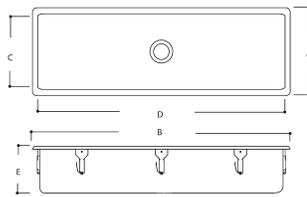

Model ART48-1 shown




Single compartment self rimming topmount sink, 18 gauge (1.2 mm), corrosion resistant type 316/316L stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes type 316 waste assembly. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Models ending in -1: 3 1/2" type 316 stainless steel crumb cup strainer assembly with 1 1/2" tailpiece included.

Models ending in -3C: 1 1/2" type 316 stainless steel duplex waste assembly with rubber stopper included.

MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	GAUGE	PRICE
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
ART36-316-1	19 1/8" (486 mm)	38 1/8" (969 mm)	17" (432 mm)	36" (914 mm)	8" (203 mm)	C	18	\$ 3,894
ART36-316-3C	19 1/8" (486 mm)	38 1/8" (969 mm)	17" (432 mm)	36" (914 mm)	8" (203 mm)	C	18	\$ 3,894
ART48-316-1	19 1/8" (486 mm)	50 1/8" (1273 mm)	17" (432 mm)	48" (1219 mm)	8" (203 mm)	C	18	\$ 4,279
ART48-316-3C	19 1/8" (486 mm)	50 1/8" (1273 mm)	17" (432 mm)	48" (1219 mm)	8" (203 mm)	C	18	\$ 4,279
ART60-316-1	19 1/8" (486 mm)	62 1/8" (1578 mm)	17" (432 mm)	60" (1524 mm)	8" (203 mm)	C	18	\$ 4,657
ART60-316-3C	19 1/8" (486 mm)	62 1/8" (1578 mm)	17" (432 mm)	60" (1524 mm)	8" (203 mm)	C	18	\$ 4,657

Scullery sink, 16 gauge, type 316

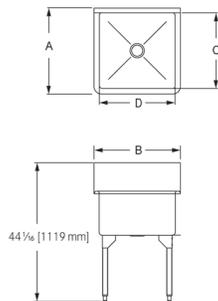

Model SL2424-316-1 shown



Single bowl scullery sink, 16 gauge (1.5 mm), corrosion resistant type 316/316L stainless steel, #4 satin finish. Sink compartment sloped to drain. Radius coved corners front and back only. Floor to rim height is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes waste assembly in type 316 stainless steel. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Models ending in -1: 3 1/2" type 316 stainless steel crumb cup strainer assembly with 1 1/2" tailpiece included.

Models ending in -1: 3 1/2" type 316 stainless steel crumb cup strainer assembly with 1 1/2" tailpiece included.


Models ending in -5: 1 1/2" type 316 stainless steel duplex waste assembly with rubber stopper included, 1 1/2" (DN38) tailpiece, standpipe, and guard.

MODEL	Overall Dimensions		Sink Compartment Dimensions				WASTE LOCATION	GAUGE	PRICE
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH	F BACKSPLASH			
SL2424-316-1	27 3/16" (691 mm)	27 3/16" (691 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	C	16	\$ 7,009
SL2424-316-5	27 3/16" (691 mm)	27 3/16" (691 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	RR	16	\$ 7,387
SL2448-316-1	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	48" (1219 mm)	14" (356 mm)	9" (229 mm)	C	16	\$ 10,607
SL2448-316-5	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	48" (1219 mm)	14" (356 mm)	9" (229 mm)	RR	16	\$ 11,555

Type 316 stainless steel sinks




Wall mount sink, 6" deep, T316
WHB1617-316-3
 Gauge **18**
TYPE 316/316L Stainless Steel
 Outside dimensions **16 1/2 x 17"**
 Inside bowl **14 x 12 x 6"**
Waste fitting type 316, 1 1/2" duplex
 waste assembly with rubber stopper
 included
 Waste location **Center back**

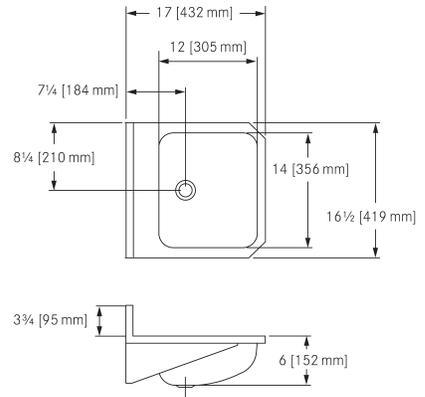

\$ 1,972




Wall mount sink, 7" deep, T316
WHB1819-316-3
 Gauge **18**
TYPE 316/316L Stainless Steel
 Outside dimensions **18 1/2 x 19"**
 Inside bowl **16 x 14 x 7"**
Waste fitting type 316, 1 1/2" duplex
 waste assembly with rubber stopper
 included
 Waste location **Center**

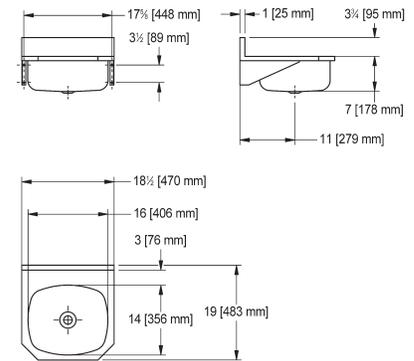

\$ 2,007



Cup sink, oval, T316
OC6-316
 Gauge **20**
TYPE 316/316L Stainless Steel
 Outside dimensions **7 1/2 x 4 1/2"**
 Inside bowl **6 x 3 x 3 11/16"**
Waste fitting Integral type 316, 1 1/2"
 duplex waste assembly included
 Waste location **Center**

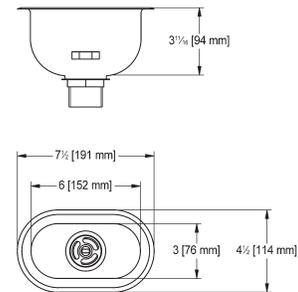


\$ 423

Mop Sinks, type 316




Single wall installation, T316
FSS151509-316-1
 Gauge 16
TYPE 316/316L Stainless Steel
 Outside dimensions **17 1/2 x 17 1/2"**
 Inside bowl **15 x 15 x 9 1/8"**
Waste fitting 2" IPS grid shower drain
 included
 Waste location **Center**

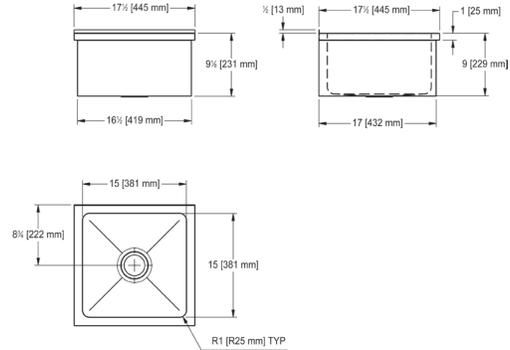

\$ 5,256




Corner installation, T316
FSS22210-316-1
 Gauge 16
TYPE 316/316L Stainless Steel
 Outside dimensions **24 x 24"**
 Inside bowl **21 1/2 x 21 1/2 x 10"**
Waste fitting 2" IPS grid shower drain
 included
 Waste location **Center**

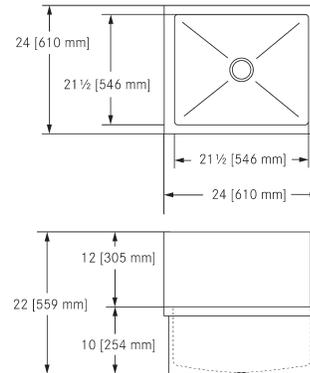


\$ 7,684




Corner installation, T316
FSSL223410-316-1
 Gauge 16
TYPE 316/316L Stainless Steel
 Side splash on left
 Outside dimensions **24 x 36"**
 Inside bowl **21 1/2 x 33 1/2 x 10"**
Waste fitting 2" IPS grid shower drain
 included
 Waste location **Center**

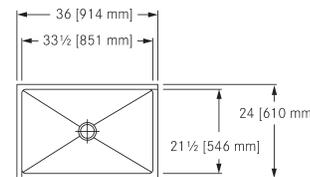


\$ 9,817

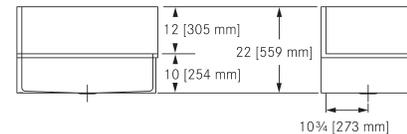

Corner installation, T316
FSSR223410-316-1
 Gauge 16
TYPE 316/316L Stainless Steel
 Side splash on right
 Outside dimensions **24 x 36"**
 Inside bowl **21 1/2 x 33 1/2 x 10"**
Waste fitting 2" IPS grid shower drain
 included
 Waste location **Center**

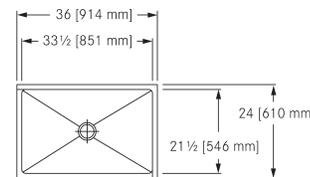

\$ 9,817


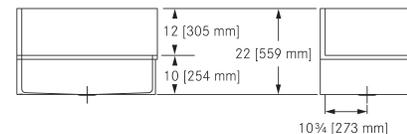


Mop Sinks, type 316





Corner installation, T316
FSS2210-316-1
 Gauge 16
TYPE 316/316L Stainless Steel
 Outside dimensions **24 x 24"**
 Inside bowl **21 1/2 x 21 1/2 x 10"**
Waste fitting 2" IPS grid shower drain included
 Waste location **Center**

\$ 11,267

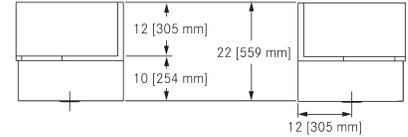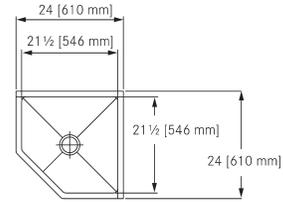



Corner installation, low front, T316
FSSO2210-316-1
 Gauge 16
TYPE 316/316L Stainless Steel
 Outside dimensions **24 x 24"**
 Inside bowl **21 1/2 x 21 1/2 x 6"**
Waste fitting 2" IPS grid shower drain included
 Waste location **Center**

\$ 11,267

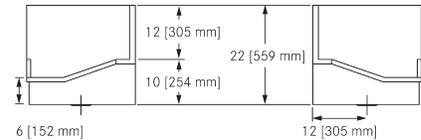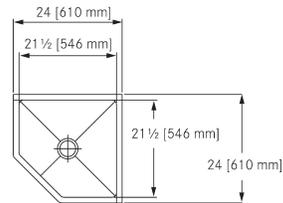



Low front, T316
FSSOL223410-316-1
 Gauge 16
TYPE 316/316L Stainless Steel
 Side splash on left
 Outside dimensions **24 x 36"**
 Inside bowl **21 1/2 x 33 1/2 x 6"**
Waste fitting 2" IPS grid shower drain included
 Waste location **Center**

\$ 11,556

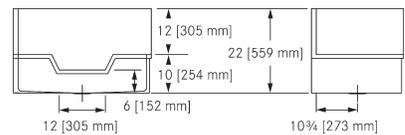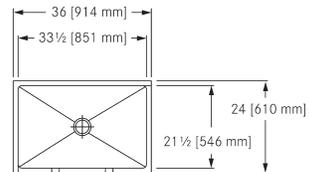

Low front, T316
FSSOR223410-316-1
 Gauge 16
TYPE 316/316L Stainless Steel
 Side splash on right
 Outside dimensions **24 x 36"**
 Inside bowl **21 1/2 x 33 1/2 x 6"**
Waste fitting 2" IPS grid shower drain included
 Waste location **Center**

\$ 11,556

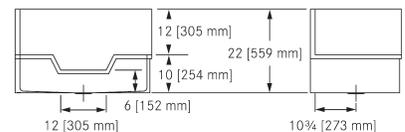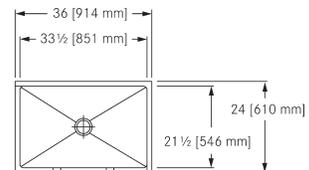


Utility & Scullery



21	Wall trough utility sinks
22	Sewage sampling
24	Scullery sinks, Classic
26	Scullery sinks, Service
29	Scullery sinks, Restaurant
32	Scullery sinks, World Class
35	Mop sinks
36	Pet wash station

Wall trough utility sink, 16 gauge

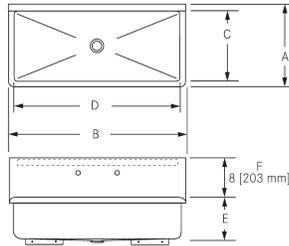


Single compartment wall trough, 16 gauge (1.5 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Radius covered bowl corners, rolled radius rim. Center waste location. 3 1/2" (89 mm) waste fitting with crumb cup strainer included. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Model WTS36-1 shown



MODEL	Overall Dimensions		Sink Compartment Dimensions				GAUGE	PRICE
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH	F BACKSPLASH		
WTS36-1	18" (457 mm)	36" (914 mm)	14 3/4" (375 mm)	33 1/2" (851 mm)	8" (203 mm)	8" (203 mm)	16	\$ 5,307
WTS48-1	18" (457 mm)	48" (1219 mm)	14 3/4" (375 mm)	44 1/2" (1130 mm)	8" (203 mm)	8" (203 mm)	16	\$ 5,504
WTS60-1	18" (457 mm)	60" (1524 mm)	14 3/4" (375 mm)	56 1/2" (1435 mm)	8" (203 mm)	8" (203 mm)	16	\$ 5,838
WTS72-1	18" (457 mm)	72" (1829 mm)	14 3/4" (375 mm)	68 1/2" (1740 mm)	8" (203 mm)	8" (203 mm)	16	\$ 6,130

Wall trough utility sink, 14 gauge

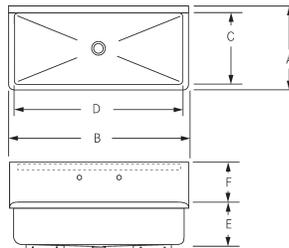

Single compartment wall trough, 14 gauge (2.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Radius covered bowl corners, rolled radius rim. Center waste location. 3 1/2" (89 mm) waste fitting with crumb cup strainer included. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Model WTS2036-1 shown



MODEL	Overall Dimensions		Sink Compartment Dimensions				GAUGE	PRICE
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH	F BACKSPLASH		
WTS2025-1	20" (508 mm)	25" (635 mm)	16 1/2" (419 mm)	22" (559 mm)	10 1/2" (267 mm)	6" (152 mm)	14	\$ 4,605
WTS2031-1	20" (508 mm)	31" (787 mm)	16 1/2" (419 mm)	28" (711 mm)	10 1/2" (267 mm)	6" (152 mm)	14	\$ 4,835
WTS2036-1	20" (508 mm)	36" (914 mm)	16 1/2" (419 mm)	33" (838 mm)	8" (203 mm)	10" (254 mm)	14	\$ 5,948
WTS2048-1	20" (508 mm)	48" (1219 mm)	16 1/2" (419 mm)	45" (1143 mm)	8" (203 mm)	10" (254 mm)	14	\$ 6,172
WTS2060-1	20" (508 mm)	60" (1524 mm)	16 1/2" (419 mm)	57" (1448 mm)	8" (203 mm)	10" (254 mm)	14	\$ 6,547
WTS2072-1	20" (508 mm)	72" (1829 mm)	16 1/2" (419 mm)	69" (1753 mm)	8" (203 mm)	10" (254 mm)	14	\$ 6,868
WTS2096-1	20" (508 mm)	96" (2438 mm)	16 1/2" (419 mm)	93" (2362 mm)	8" (203 mm)	10" (254 mm)	14	\$ 7,437

Sewage sampling sinks



Sewage sampling sink, single bowl no drainboard SSS1827

Single compartment sewage sampling sink. 14 gauge (2.0 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners.


Anti-splash rim. Stainless steel $\frac{3}{4}$ " (19 mm) O.D. flushing tube with $\frac{1}{2}$ " (13 mm) NPS connection. 3" x 3" (76 x 76 mm) threaded waste outlet.

Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Please allow 6 weeks for delivery.

Inside bowl **14 x 18 x 15"**

\$ 17,925

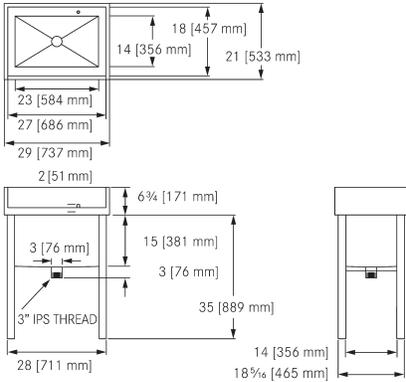

Sewage sampling sink, single bowl, left drainboard SSS1827SDSL

Single compartment sewage sampling sink left drainboard. 14 gauge (2.0 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners.

Anti-splash rim. Stainless steel $\frac{3}{4}$ " (19 mm) O.D. flushing tube with $\frac{1}{2}$ " (13 mm) NPS connection. 3 x 3" (76 x 76 mm) threaded waste outlet.


Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Please allow 6 weeks for delivery.

Left drainboard.

Inside bowl **14 x 18 x 15"**

\$ 19,263

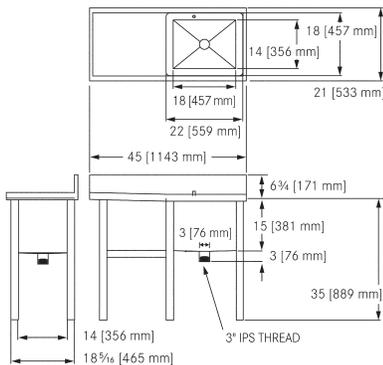

Sewage sampling sinks



Sewage sampling sink, single bowl, right drainboard SSS1827SDSR


Single compartment sewage sampling sink right drainboard. 14 gauge (2.0 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Anti-splash rim. Stainless steel $\frac{3}{4}$ " (19 mm) O.D. flushing tube with $\frac{1}{2}$ " (13 mm) NPS connection. 3" x 3" (76 x 76 mm) threaded waste outlet. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Please allow 6 weeks for delivery.

Right drainboard.

Inside bowl **14 x 18 x 15"**

\$ 19,263

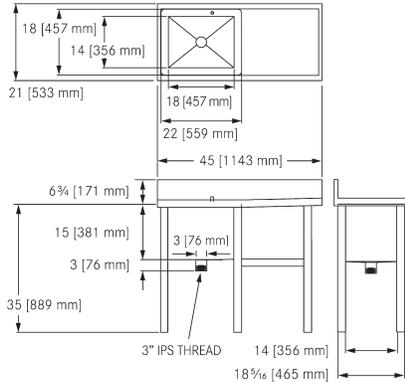

Sewage sampling sink, left and right drainboards SSS1827DDS

Single compartment sewage sampling sink left and right drainboard. 14 gauge (2.0 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners.


Anti-splash rim. Stainless steel $\frac{3}{4}$ " (19 mm) O.D. flushing tube with $\frac{1}{2}$ " (13 mm) NPS connection. 3" x 3" (76 x 76 mm) threaded waste outlet. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Please allow 6 weeks for delivery.

Double drainboards.

Inside bowl **14 x 18 x 15"**


\$ 23,807

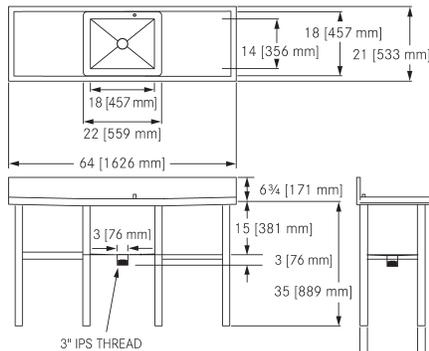

Scullery sinks, Classic series



Model SL2424-1 shown

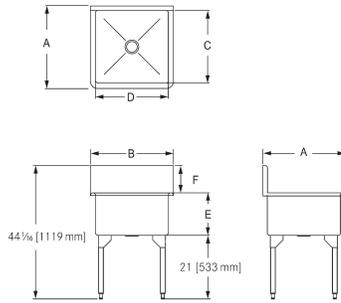

Single bowl scullery sink, 16 gauge (1.5 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartment sloped to drain, radius coved corners front and back only. Floor to rim height 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes waste assembly.

Standard faucet hole option: 2 hole, 1 1/4" (32 mm) diameter, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models.

Certified to ASME A112.19.3-2008 / CSA B45.4-08.


Models ending in -1: 3 1/2" crumb cup strainer assembly with 1 1/2" stainless steel tailpiece included.

Models ending in -5: 1 1/2" duplex waste assembly with rubber stopper, 1 1/2" (DN38) tailpiece, standpipe, and guard included.

MODEL	Overall Dimensions		Sink Compartment Dimensions				WASTE LOCATION	GAUGE	PRICE
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH	F BACKSPLASH			
SL2424-1	27 3/16" (691 mm)	27 3/16" (691 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	C	16	\$ 3,468
SL2424-5	27 3/16" (691 mm)	27 3/16" (691 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	RR	16	\$ 3,607
SL2448-1	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	48" (1219 mm)	14" (356 mm)	9" (229 mm)	C	16	\$ 4,748
SL2448-5	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	48" (1219 mm)	14" (356 mm)	9" (229 mm)	RR	16	\$ 4,921



Model DL2448-1 shown

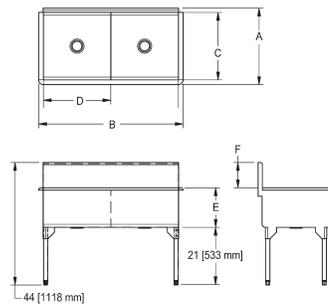

Double bowl scullery sink, 16 gauge (1.5 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartment sloped to drain, radius coved corners front and back only. Floor to rim height 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes waste assemblies.

Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models.

Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Models ending in -1: 3 1/2" crumb cup strainer assembly with 1 1/2" stainless steel tailpiece included.


Models ending in -5: 1 1/2" duplex waste assembly with rubber stopper, 1 1/2" (DN38) tailpiece, standpipe, and guard included.

MODEL	Overall Dimensions		Sink Compartment Dimensions				WASTE LOCATION	GAUGE	PRICE
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH	F BACKSPLASH			
DL2448-1	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	C	16	\$ 5,799
DL2448-5	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	RR, LR	16	\$ 6,154

Scullery sinks, Classic series



Model TL2454-1 shown

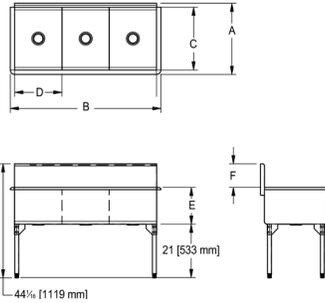

Triple bowl scullery sink, 16 gauge (1.5 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartment sloped to drain, radius covered corners front and back only. Floor to rim height 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes waste assemblies.

Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Certified to ASME A112.19.3-2008 / CSA B45.4-08

Models ending in -1: 3 1/2" crumb cup strainer assembly with 1 1/2" stainless steel tailpiece included.

Models ending in -5: 1 1/2" duplex waste assembly with rubber stopper, 1 1/2" (DN38) tailpiece, standpipe, and guard included.

MODEL	Overall Dimensions		Sink Compartment Dimensions				WASTE LOCATION	GAUGE	PRICE
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH	F BACKSPLASH			
TL2454-1	27 3/16" (691 mm)	57 3/8" (1457 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	C	16	\$ 6,791
TL2454-5	27 3/16" (691 mm)	57 3/8" (1457 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	RR, RR, LR	16	\$ 7,343
TL2472-1	27 3/16" (691 mm)	75 3/8" (1915 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	C	16	\$ 8,418
TL2472-5	27 3/16" (691 mm)	75 3/8" (1915 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	RR, RR, LR	16	\$ 8,929




Removable drainboard for Classic series scullery sinks CL-DB

Removable drainboard for Classic series scullery sinks. 16 gauge (1.5 mm) type 304 stainless steel. Polished to a satin finish. The legs have adjustable feet and are interchangeable such that the product can be installed on either the left or right of the scullery.

Outside dimensions **23 x 24 x 36"**

Install on **left or right**

\$ 1,488

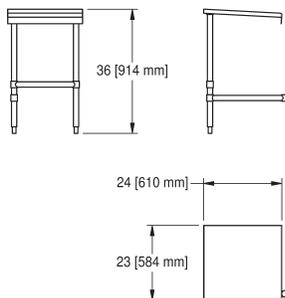

Scullery sinks, Service series, single compartment



Model SSL2424-1 shown

Single bowl scullery sink with square bowl corners. 14 gauge (2.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartment sloped to center drain, radius coved corners front and back only. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece.

Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm).

Standard faucet hole option: 2 hole, 1 1/4" (32 mm) diameter, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Please allow 6 weeks for delivery, these models are built to order and non-returnable.

Certified to ASME A112.19.3-2008 / CSA B45.4-08.



Single compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
SSL2418-1	30 1/2" (775 mm)	22 1/4" (565 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 5,147
SSL2424-1	30 1/2" (775 mm)	28 1/4" (718 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 5,799

Single compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
SSL2418L-1	30 1/2" (775 mm)	40 1/4" (1022 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 6,446
SSL2418R-1	30 1/2" (775 mm)	40 1/4" (1022 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 6,446
SSL2424L-1	30 1/2" (775 mm)	52 1/4" (1327 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 7,093
SSL2424R-1	30 1/2" (775 mm)	52 1/4" (1327 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 7,093

Single compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
SSL2418LR-1	30 1/2" (775 mm)	58 1/4" (1480 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L&R	14	\$ 7,742
SSL2424LR-1	30 1/2" (775 mm)	76 1/4" (1937 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L&R	14	\$ 8,391

Scullery sinks, Service series, double compartment



Model SDL2448-1 shown

Double bowl scullery sink with square bowl corners. 14 gauge (2.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartments sloped to center drain, radius coved corners front and back only. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece.

Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm).

Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Please allow 6 weeks for delivery, these models are built to order and non-returnable. Certified to ASME A112.19.3-2008 / CSA B45.4-08.



Double compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
SDL2436-1	30 1/2" (775 mm)	42 1/4" (1073 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 8,391
SDL2448-1	30 1/2" (775 mm)	54 1/4" (1378 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 9,037

Double compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
SDL2436L-1	30 1/2" (775 mm)	60 1/4" (1530 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 9,683
SDL2436R-1	30 1/2" (775 mm)	60 1/4" (1530 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 9,683
SDL2448L-1	30 1/2" (775 mm)	78 1/4" (1988 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 10,333
SDL2448R-1	30 1/2" (775 mm)	78 1/4" (1988 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 10,333

Double compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
SDL2436LR-1	30 1/2" (775 mm)	78 1/4" (1988 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L&R	14	\$ 10,978
SDL2448LR-1	30 1/2" (775 mm)	102 1/4" (2597 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L&R	14	\$ 11,629

Scullery sinks, Service series, triple compartment



Model STL2472-1 shown

Triple bowl scullery sink with square bowl corners. 14 gauge (2.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartments sloped to center drain, radius coved corners front and back only. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece.

Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm).

Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models.

Please allow 6 weeks for delivery, these models are built to order and non-returnable. Certified to ASME A112.19.3-2008 / CSA B45.4-08.




Triple compartment without drainboard



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
STL2454-1	30 1/2" (775 mm)	60 1/4" (1530 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 10,333
STL2472-1	30 1/2" (775 mm)	78 1/4" (1988 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 13,570

Triple compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
STL2454L-1	30 1/2" (775 mm)	78 1/4" (1988 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 11,629
STL2454R-1	30 1/2" (775 mm)	78 1/4" (1988 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 11,629
STL2472L-1	30 1/2" (775 mm)	102 1/4" (2597 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 14,871
STL2472R-1	30 1/2" (775 mm)	102 1/4" (2597 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 14,871

Triple compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
STL2454LR-1	30 1/2" (775 mm)	96 1/4" (2445 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L&R	14	\$ 12,924
STL2472LR-1	30 1/2" (775 mm)	126 1/4" (3207 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L&R	14	\$ 16,163

Scullery sinks, Restaurant series, single compartment



Single bowl scullery sink with radius coved corners, constructed with hygiene and food safety in mind. 16 gauge (1.5 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartment sloped to center drain, radius coved corners that are easy to clean. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm). Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Please allow 6 weeks for delivery, these models are built to order and non-returnable. Product compliance ASME A112.19.3/ CSA B45.4, NSF 2.

Model RSL2424-1 shown



Single compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
RSL2418-1	30 1/2" (775 mm)	22 1/4" (565 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	16	\$ 5,690
RSL2424-1	30 1/2" (775 mm)	28 1/4" (718 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	16	\$ 5,990

Single compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
RSL2418L-1	30 1/2" (775 mm)	40 1/4" (1022 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	16	\$ 7,030
RSL2418R-1	30 1/2" (775 mm)	40 1/4" (1022 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	16	\$ 7,030
RSL2424L-1	30 1/2" (775 mm)	52 1/4" (1327 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	16	\$ 7,330
RSL2424R-1	30 1/2" (775 mm)	52 1/4" (1327 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	16	\$ 7,330

Single compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
RSL2418LR-1	30 1/2" (775 mm)	58 1/4" (1480 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L&R	16	\$ 8,367
RSL2424LR-1	30 1/2" (775 mm)	76 1/4" (1937 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L&R	16	\$ 8,668

Scullery sinks, Restaurant series, double compartment



Double bowl scullery sink with radius covered corners, constructed with hygiene and food safety in mind. 16 gauge (1.5 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartments sloped to center drain, radius covered corners that are easy to clean. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm). Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Please allow 6 weeks for delivery, these models are built to order and non-returnable. Product compliance ASME A112.19.3/ CSA B45.4, NSF 2.

Model RDL2448-1 shown




Double compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
RDL2436-1	30 1/2" (775 mm)	44 1/4" (1121 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	16	\$ 8,668
RDL2448-1	30 1/2" (775 mm)	56 1/8" (1425 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	16	\$ 9,338

Double compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
RDL2436L-1	30 1/2" (775 mm)	62 1/8" (1578 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	16	\$ 10,008
RDL2436R-1	30 1/2" (775 mm)	62 1/8" (1578 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	16	\$ 10,008
RDL2448L-1	30 1/2" (775 mm)	80 1/8" (2035 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	16	\$ 10,677
RDL2448R-1	30 1/2" (775 mm)	80 1/8" (2035 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	16	\$ 10,677

Double compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
RDL2436LR-1	30 1/2" (775 mm)	80 1/8" (2035 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L & R	16	\$ 11,347
RDL2448LR-1	30 1/2" (775 mm)	104 1/8" (2645 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L & R	16	\$ 12,015

Scullery sinks, Restaurant series, triple compartment



Model RTL2472-1 shown

Triple bowl scullery sink with radius covered corners, constructed with hygiene and food safety in mind. 16 gauge (1.5 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartments sloped to center drain, radius covered corners that are easy to clean. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece.

Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm).

Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models.

Please allow 6 weeks for delivery, these models are built to order and non-returnable. Product compliance ASME A112.19.3/ CSA B45.4, NSF 2.




Triple compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
RTL2454-1	30 1/2" (775 mm)	64 1/8" (1629 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	16	\$ 13,356
RTL2472-1	30 1/2" (775 mm)	82 1/8" (2086 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	16	\$ 14,026

Triple compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
RTL2454L-1	30 1/2" (775 mm)	78 1/8" (1984 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	16	\$ 14,693
RTL2454R-1	30 1/2" (775 mm)	78 1/8" (1984 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	16	\$ 14,693
RTL2472L-1	30 1/2" (775 mm)	106 1/8" (2695 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	16	\$ 15,362
RTL2472R-1	30 1/2" (775 mm)	106 1/8" (2695 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	16	\$ 15,362

Triple compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
RTL2454LR-1	30 1/2" (775 mm)	92 1/8" (2340 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L & R	16	\$ 16,033
RTL2472LR-1	30 1/2" (775 mm)	130 1/8" (3305 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L & R	16	\$ 16,699

Scullery sinks, World Class series, single compartment



Single bowl scullery sink with radius covered bowl corners, constructed with hygiene and food safety in mind. 14 gauge (2.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartment sloped to center drain, radius covered corners that are easy to clean. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm). Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Please allow 6 weeks for delivery, these models are built to order and non-returnable. Product compliance ASME A112.19.3/ CSA B45.4, NSF 2.

Model WSL2424-1 shown




Single compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
WSL2418-1	30 1/2" (775 mm)	22 1/4" (565 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 6,596
WSL2424-1	30 1/2" (775 mm)	28 1/4" (718 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 7,335

Single compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
WSL2418L-1	30 1/2" (775 mm)	40 1/4" (1022 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 8,069
WSL2418R-1	30 1/2" (775 mm)	40 1/4" (1022 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 8,069
WSL2424L-1	30 1/2" (775 mm)	52 1/4" (1327 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 8,808
WSL2424R-1	30 1/2" (775 mm)	52 1/4" (1327 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 8,808

Single compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
WSL2418LR-1	30 1/2" (775 mm)	58 1/4" (1480 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L&R	14	\$ 9,545
WSL2424LR-1	30 1/2" (775 mm)	76 1/4" (1937 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L&R	14	\$ 10,280

Scullery sinks, World Class series, double compartment



Model WDL2448-1 shown

Double bowl scullery sink with radius covered bowl corners, constructed with hygiene and food safety in mind. 14 gauge (2.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartments sloped to center drain, radius covered corners that are easy to clean. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm). Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Please allow 6 weeks for delivery, these models are built to order and non-returnable. Product compliance ASME A112.19.3/ CSA B45.4, NSF 2.




Double compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
WDL2436-1	30 1/2" (775 mm)	44 1/4" (1121 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 9,805
WDL2448-1	30 1/2" (775 mm)	56 1/8" (1425 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 10,509

Double compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
WDL2436L-1	30 1/2" (775 mm)	62 1/8" (1578 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 11,212
WDL2436R-1	30 1/2" (775 mm)	62 1/8" (1578 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 11,212
WDL2448L-1	30 1/2" (775 mm)	80 1/8" (2035 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 11,916
WDL2448R-1	30 1/2" (775 mm)	80 1/8" (2035 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 11,916

Double compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
WDL2436LR-1	30 1/2" (775 mm)	80 1/8" (2035 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L&R	14	\$ 12,620
WDL2448LR-1	30 1/2" (775 mm)	104 1/8" (2645 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L&R	14	\$ 13,323

Scullery sinks, World Class series, triple compartment



Model WDL2448-1 shown

Triple bowl scullery sink with radius covered bowl corners, constructed with hygiene and food safety in mind. 14 gauge (2.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartments sloped to center drain, radius covered corners that are easy to clean. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm). Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Please allow 6 weeks for delivery, these models are built to order and non-returnable. Product compliance ASME A112.19.3/ CSA B45.4, NSF 2.




Triple compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
WTL2454-1	30 1/2" (775 mm)	64 1/8" (1629 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 16,177
WTL2472-1	30 1/2" (775 mm)	82 1/8" (2086 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 16,917

Triple compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
WTL2454L-1	30 1/2" (775 mm)	78 1/8" (1984 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 17,654
WTL2454R-1	30 1/2" (775 mm)	78 1/8" (1984 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 17,654
WTL2472L-1	30 1/2" (775 mm)	106 1/8" (2695 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 18,389
WTL2472R-1	30 1/2" (775 mm)	106 1/8" (2695 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 18,389

Triple compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
WTL2454LR-1	30 1/2" (775 mm)	92 1/8" (2340 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L&R	14	\$ 19,128
WTL2472LR-1	30 1/2" (775 mm)	130 1/8" (3305 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L&R	14	\$ 19,865

Mop utility sinks



Mop sinks, boot wash stations in Type 316 stainless steel



Model FSSOR223410-316-1 shown

	Overall Dimensions		Sink Compartment Dimensions			FRONT EDGE STYLE	SPLASH LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH				
FSS151509-316-1	17 1/2" (445 mm)	17 1/2" (445 mm)	15" (381 mm)	15" (381 mm)	9 1/4" (231 mm)	Straight	-	16	\$ 5,256
FSS222210-316-1	24" (610 mm)	24" (610 mm)	21 1/2" (546 mm)	21 1/2" (546 mm)	10" (254 mm)	Straight	L&R	16	\$ 7,684
FSSL223410-316-1	24" (610 mm)	36" (914 mm)	21 1/2" (546 mm)	33 1/2" (851 mm)	10" (254 mm)	Straight	L	16	\$ 9,817
FSSR223410-316-1	24" (610 mm)	36" (914 mm)	21 1/2" (546 mm)	33 1/2" (851 mm)	10" (254 mm)	Square front	R	16	\$ 9,817
FSS2210-316-1	24" (610 mm)	24" (610 mm)	21 1/2" (546 mm)	21 1/2" (546 mm)	10" (254 mm)	Angular front	L&R	16	\$ 11,267
FSSO2210-316-1	24" (610 mm)	24" (610 mm)	21 1/2" (546 mm)	21 1/2" (546 mm)	10" (254 mm)	Drop front	L&R	16	\$ 11,267
FSSOL223410-316-1	24" (610 mm)	36" (914 mm)	21 1/2" (546 mm)	33 1/2" (851 mm)	10" (254 mm)	Drop front	L	16	\$ 11,556
FSSOR223410-316-1	24" (610 mm)	36" (914 mm)	21 1/2" (546 mm)	33 1/2" (851 mm)	10" (254 mm)	Drop front	R	16	\$ 11,556



Detailed specification information on MOP SINKS can be found on pages 18 & 19

Pet Wash Station



Pet wash station PWS-50

18 gauge (1.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish.

This pet wash station features a lift out front access door with pull out ramp and vandal resistant height adjustable inner trays. Both the ramp and trays feature anti slip surface. Upper bar features adjustable tether point for leash. Each tray has 2 handles that double as a lower tether point to keep the pets safe and prevent jumping out of the fixture.


Supplied with 3 1/2" waste fitting with T316 grid and OFK150 overflow kit to reduce chance of flooding if the waste fills with hair.

Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Outside dimensions **24 15/16" x 49 7/8" x 59 1/8"**

Inside bowl **22 x 47 7/8" x 20"**

Waste location **Center**

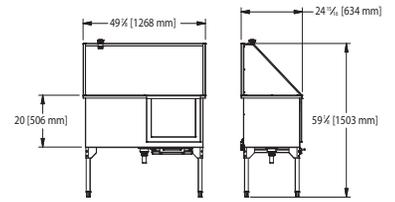

Pet wash station features



Pet wash stations



Pictured left to right: WTS60-1 trough sink, FSSOL223410-316-1 and FSSOR223410-316-1 mop sinks

Dog washing stations: a must in multifamily developments

Renters are living for their pets


Pet ownership in Canada increased throughout the pandemic and remains at very high levels. Over 60% of households own at least one dog or cat, and that includes apartment and condo dwellers.

Make space for pets in your floor plan

Most renters consider pet-friendly policies when choosing a place to live. A dog washing room on the main floor provides an accessible space for pet owners to clean off dirty paws or give their furbabies a full bath.

Options for dogs big and small


Floor-mounted sinks allow large dogs to step into without the need for lifting or guiding onto a ramp. A wall-mounted trough is perfect for smaller dogs to be placed for washing at a comfortable height. High backsplashes help keep the mess contained.

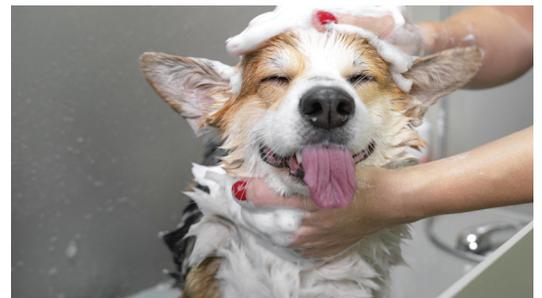

Vanity Basins



Oval vanity basin topmount no faucet ledge

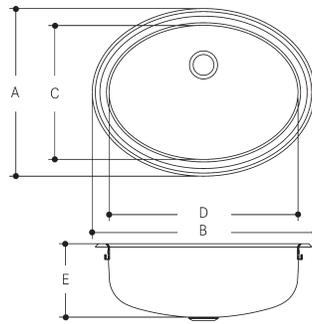

Model V1114-5 shown



Single compartment self rimming oval topmount vanity basin without faucet ledge. 18 gauge (1.2 mm), Type 304 (CNS 18/10) stainless steel with satin finish bowl, mirror finish rim. Center back waste location. Undercoated to reduce condensation and resonance. Factory applied rim seal. Includes cutout template and installation hardware.


Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Models that end in -5D or -6D include a 1 1/2" (38 mm) waste assembly with rubber stopper.

Models that end in -5 or -6 accept a 1 1/4" (32 mm) waste assembly, not included.

♿	MODEL	Overall Dimensions		Sink Compartment Dimensions			OVER-FLOW	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	V1114-5	10 7/8" (276 mm)	14 3/8" (365 mm)	8 1/8" (206 mm)	11 5/8" (295 mm)	5" (127 mm)	-	18	\$ 322
•	V1114-5D	10 7/8" (276 mm)	14 3/8" (365 mm)	8 1/8" (206 mm)	11 5/8" (295 mm)	5" (127 mm)	-	18	\$ 336
•	V1418-5	13 3/4" (349 mm)	18 1/4" (464 mm)	11" (279 mm)	15 1/2" (394 mm)	5" (127 mm)	-	18	\$ 396
•	V1418-6	13 3/4" (349 mm)	18 1/4" (464 mm)	11" (279 mm)	15 1/2" (394 mm)	6" (152 mm)	-	18	\$ 396
•	OV1418-6	13 3/4" (349 mm)	18 1/4" (464 mm)	11" (279 mm)	15 1/2" (394 mm)	6" (152 mm)	Front	18	\$ 466

Round vanity basin topmount no faucet ledge

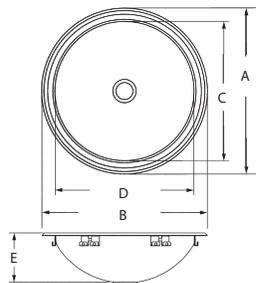

Model OV17-6 shown



Single compartment self rimming round topmount vanity basin without faucet ledge. 18 gauge (1.2 mm), Type 304 (CNS 18/10) stainless steel with satin finish bowl, mirror finish rim. Center back waste location. Undercoated to reduce condensation and resonance. Factory applied rim seal. Includes cutout template and installation hardware.

Certified to ASME A112.19.3-2008 / CSA B45.4-08.


Models that end in -5 or -6 accept a 1 1/4" (32 mm) waste assembly, not included.

♿	MODEL	Overall Dimensions		Sink Compartment Dimensions			OVER-FLOW	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	V17-5	16 3/4" (425 mm)	16 3/4" (425 mm)	14" (356 mm)	14" (356 mm)	5" (127 mm)	-	18	\$ 436
•	V17-6	16 3/4" (425 mm)	16 3/4" (425 mm)	14" (356 mm)	14" (356 mm)	5" (127 mm)	-	18	\$ 454
•	OV17-6	16 3/4" (425 mm)	16 3/4" (425 mm)	14" (356 mm)	14" (356 mm)	6" (152 mm)	Front	18	\$ 472


Vanity basin topmount with faucet ledge




With ledge, 5" deep, overflow
OV1619-5-1 1 hole, centered
OV1619-5-3 3 hole, 4" centerset
 Gauge 18
 Outside dimensions **16 3/8 x 18 1/2"**
 Inside bowl **11 x 15 3/16 x 5"**
 Mirror finished rim, #4 satin finished bowl
 Integral **overflow** at back of bowl
 Accepts 1 1/4" (32 mm) overflow waste assembly,
 not included
 Waste location **Center back**
 Minimum cabinet size **24"**
\$ 547

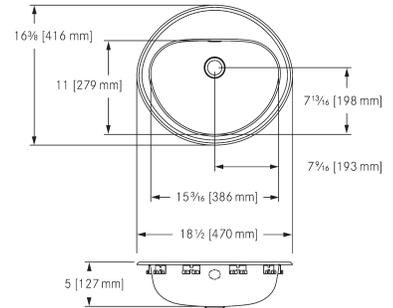


With ledge, 5" deep, no overflow
V1619-5-1 1 hole, centered
V1619-5-3 3 hole, 4" centerset
 Gauge 18
 Outside dimensions **16 3/8 x 18 1/2"**
 Inside bowl **11 x 15 3/16 x 5"**
 Mirror finished rim, #4 satin finished bowl
 Accepts 1 1/4" (32 mm) waste assembly, not
 included
 Waste location **Center back**
 Minimum cabinet size **24"**
\$ 466

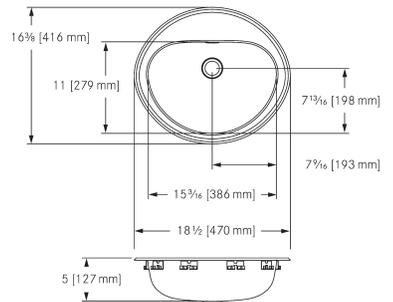

With ledge, 6" deep, overflow
OV1619-6-1 1 hole, centered
OV1619-6-3 3 hole, 4" centerset
 Gauge 18
 Outside dimensions **16 3/8 x 18 1/2"**
 Inside bowl **11 x 15 3/16 x 6"**
 Mirror finished rim, #4 satin finished bowl
 Integral **overflow** at back of bowl
 Accepts 1 1/4" (32 mm) overflow waste assembly,
 not included
 Waste location **Center back**
 Minimum cabinet size **24"**
\$ 502

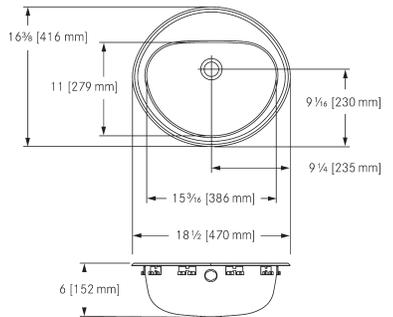


With ledge, 6" deep, no overflow
V1619-6-1 1 hole, centered
V1619-6-3 3 hole, 4" centerset
 Gauge 18
 Outside dimensions **16 3/8 x 18 1/2"**
 Inside bowl **11 x 15 3/16 x 6"**
 Mirror finished rim, #4 satin finished bowl
 Accepts 1 1/4" (32 mm) waste assembly, not
 included
 Waste location **Center back**
 Minimum cabinet size **24"**
\$ 477

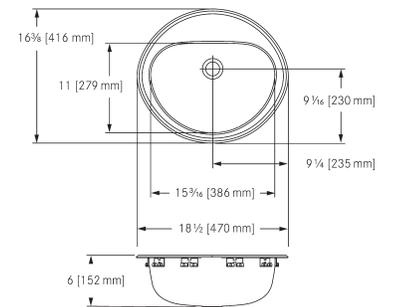


Vanity basin topmount with faucet ledge




With ledge, 5" deep, overflow
OV1821-5-1 1 hole, centered
OV1821-5-3 3 hole, 4" centerset
 Gauge 18
 Outside dimensions **18 x 21"**
 Inside bowl **11⁷/₁₆ x 18 x 5"**
 Mirror finished rim, #4 satin finished bowl
 Integral **overflow** at back of bowl
 Accepts 1¹/₄" (32 mm) overflow waste assembly,
 not included
 Waste location **Center back**
 Minimum cabinet size **24"**
\$ 577

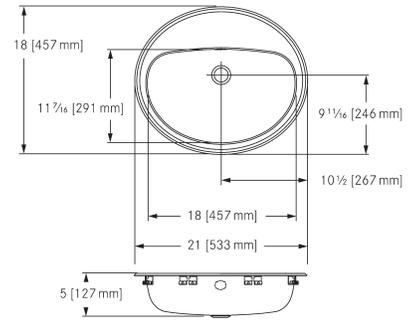


With ledge, 5" deep, no overflow
V1821-5-1 1 hole, centered
V1821-5-3 3 hole, 4" centerset
 Gauge 18
 Outside dimensions **18 x 21"**
 Inside bowl **11⁷/₁₆ x 18 x 5"**
 Mirror finished rim, #4 satin finished bowl
 Accepts 1¹/₄" (32 mm) waste assembly, not
 included
 Waste location **Center back**
 Minimum cabinet size **24"**
\$ 498

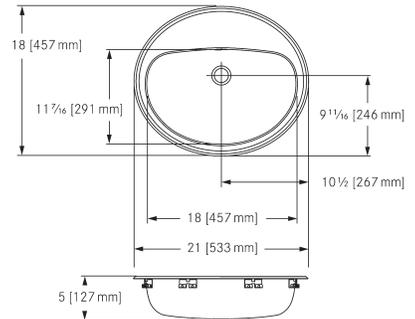

With ledge, 6" deep, overflow
OV1821-6-1 1 hole, centered
OV1821-6-3 3 hole, 4" centerset
 Gauge 18
 Outside dimensions **18 x 21"**
 Inside bowl **11⁷/₁₆ x 18 x 6"**
 Mirror finished rim, #4 satin finished bowl
 Integral **overflow** at back of bowl
 Accepts 1¹/₄" (32 mm) overflow waste assembly,
 not included
 Waste location **Center back**
 Minimum cabinet size **24"**
\$ 519

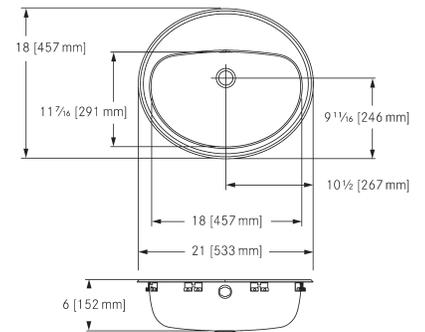



With ledge, 6" deep, no overflow
V1821-6-1 1 hole, centered
V1821-6-3 3 hole, 4" centerset
 Gauge 18
 Outside dimensions **18 x 21"**
 Inside bowl **11⁷/₁₆ x 18 x 6"**
 Mirror finished rim, #4 satin finished bowl
 Accepts 1¹/₄" (32 mm) waste assembly, not
 included
 Waste location **Center back**
 Minimum cabinet size **24"**
\$ 496

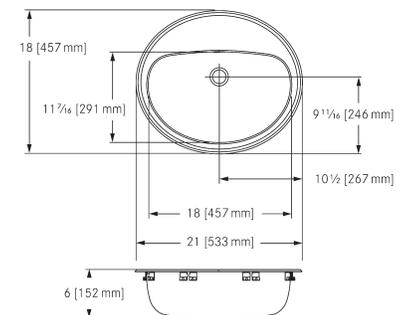

Vanity basin undermount




**Undermount, rectangular, no overflow
WB1119U-5**
 Gauge 18
 Outside dimensions 11 x 19"
 Inside bowl 9 x 17 x 4 1/2"
 #4 satin finished bowl
 Accepts 1 1/4" (32 mm) waste assembly, not included
 Waste location **Center back**
 Minimum cabinet size 24"

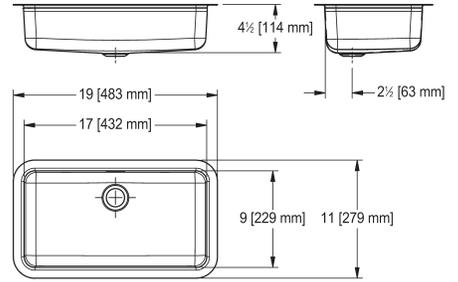

\$ 526





**Undermount, U-shaped, overflow
OWB1420U-5**
 Gauge 18
 Outside dimensions 14 x 20"
 Inside bowl 12 x 18 x 4 1/2"
 #4 satin finished bowl
 Integral **overflow** at back of bowl
 Accepts 1 1/4" (32 mm) overflow waste assembly, not included
 Waste location **Center back**
 Minimum cabinet size 24"

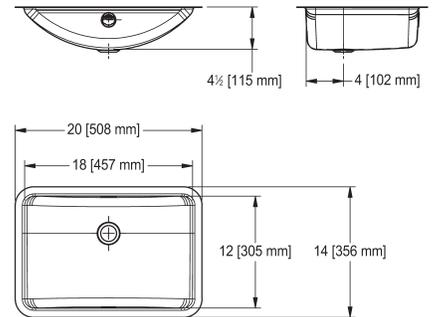

\$ 784



**Undermount, U-shaped, no overflow
WB1420U-5**
 Gauge 18
 Outside dimensions 14 x 20"
 Inside bowl 12 x 18 x 4 1/2"
 #4 satin finished bowl
 Accepts 1 1/4" (32 mm) waste assembly, not included
 Waste location **Center back**
 Minimum cabinet size 24"

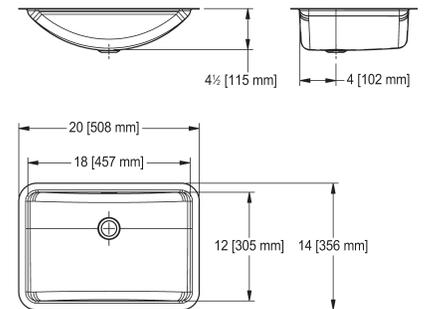

\$ 736

Vanity basin undermount



Undermount with overflow OV1317U-5

Gauge **18**

Outside dimensions **13 1/4 x 17 7/16"**

Inside bowl **10 15/16 x 15 3/16 x 5"**


#4 satin finished bowl

Integral **overflow** at back of bowl

Accepts 1 1/4" (32 mm) overflow waste
assembly, not included

Waste location **Center back**

Minimum cabinet size **24"**

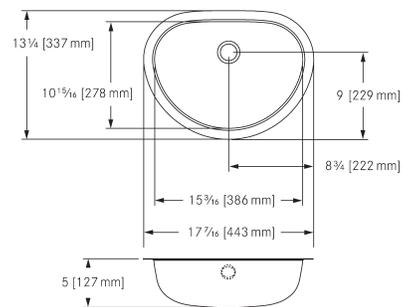

\$ 665



Undermount with overflow OV1420U-5

Gauge **18**

Outside dimensions **13 11/16 x 20 1/4"**

Inside bowl **11 7/16 x 18 x 5"**


#4 satin finished bowl

Integral **overflow** at back of bowl

Accepts 1 1/4" (32 mm) overflow waste
assembly, not included

Waste location **Center back**

Minimum cabinet size **24"**

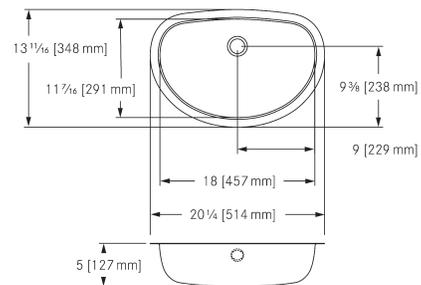

\$ 731



Healthcare



Pictured: HWSS2321W-00 Medi-flo sink

45	Medi-flo healthcare sink
46	Ozo-flo faucets
47	Medi-flo & Ozo-flo accessories
48	Nightingale hand hygiene sinks
50	Nightingale Elite hand hygiene sinks
51	Premium surgical scrub sinks
52	Classic surgical scrub sinks
53	Premium surgical scrub sinks bundles
54	Clinical wash basins
56	Dual mount healthcare sinks

Medi-flo hand hygiene sink with integrated spout

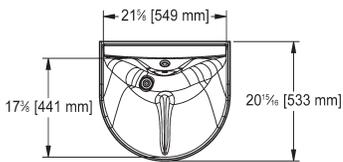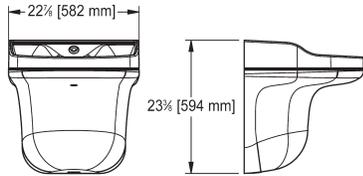

Patient room sink with integrated spout for infection control

HWSS2321W-00

Wall mount healthcare sink with laminar flow spout with integrated electrochemical water disinfection technology. White solid surface hand hygiene sink with removable shroud. Left rear 1 1/2" (DN 40) waste location to prevent water from splashing directly into the waste. An anti-splash feature runs through the center of the sink to greatly reduce splashing. Infrared controls trigger an illuminated laminar flow stream delivering water with dissolved ozone and other mixed oxidants on demand. Flow rate is 5.7 Lpm/1.5 gpm.

Recommended for areas with normal water conductivity above 75 TDS. If unaware of your local water conductivity, please contact customer service and this can easily be determined for you. Recommended water temperature is between 80-95°F (27-35°C). Hand hygiene sinks are specifically designed for hand washing only. They are not recommended as a drinking source, for washing utensils or for draining of medical bags or bedpans.

A plug-in transformer required for generation of mixed oxidants is included. Medi-flo is cUPC certified and is compliant with CSA B45.5-11/IAPMO Z124-2011 and IGC156-2012el. Meets and exceeds various national healthcare standards; ie, Z317/CSAZ8000. Wheelchair accessible: meets ADA, ANSI A117.1 and CSA B651-04. Patent Pending.

Optional: Pre-set thermostatic mixing valve **MEDI-MIX**.
Optional: In-wall carrier **IWC2104** for quicker installation.

\$ 5,526




Medi-flo splash reduction features

- Side splashes to prevent water from splashing out of the sink
- Laminar flow spout
- Infrared sensor turns water on when user places hands inside sink
- Center rib diverts water flow from faucet
- Integral waste, offset drain in rear left position

Laminar flow spout reduces splashing

Medi-flo delivers water in a laminar flow stream. Laminar flow occurs when water molecules move in an orderly, straight line for a turbulence-free stream.

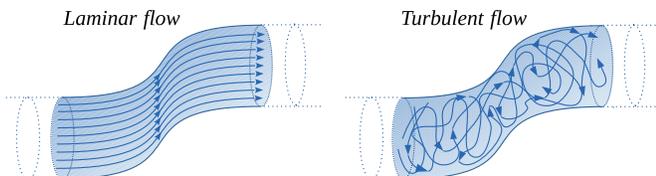

Efficacy of electrochemical water disinfection

Pathogen	Efficacy	Contact time	Source
Candida auris	99.9%	10 minutes	Cleveland VA Medical Center
C. difficile spores	64%	20 seconds	EMSL Canada Inc.
Klebsiella pneumoniae	99.99%	30 seconds	EMSL Canada Inc.
Legionella pneumophila	99.99%	5 minutes	EMSL Canada Inc.
MRSA	99.9%	10 minutes	Cleveland VA Medical Center
Pseudomonas	99.9%	10 minutes	Cleveland VA Medical Center

Time kill studies performed by 3rd party laboratories show that electrochemical water disinfection can be effective at reducing certain waterborne pathogens. These rates are attributed to electrochemical water disinfection, not a product performance claim.


Ozo-flo laminar flow healthcare faucets

Ozo-flo hands-free clinical faucets are ideal for new or retrofit applications where hand wash sinks can benefit from added infection control. The addition of ozone and other mixed oxidants to the water will help keep the sink and waste free of biofilms and bacteria. Faucets are fabricated from Type 316 stainless steel and feature a blue illumination ring indicating activation of ozonation cycle. Control features include a post-wash cycle of 3 seconds to wash soap residue and bacteria down the drain. A daily purge cycle prevents water from stagnating in the drain lines for continuous waste disinfection.



Ozo-flo touch free faucet, wall mount HWF05

Front to back **7 5/8"**
 Diameter **1 1/2"**
 Hands free operation
Laminar flow 5.7 Lpm/1.5 gpm
 Includes ozone generator unit with plug-in transformer.
 Requires thermostatic mixing valve, not included.
 Recommended: MEDI-MIX.
 Certified to ASME A112.18.1/B125.1, UL1951, UL979 for ozone features, and CSA C22.2, Numbers 68 and 14.

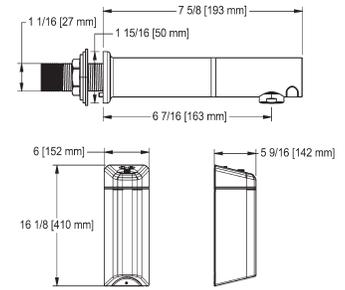


\$ 4,361



Ozo-flo touch free faucet, deck mount, angled HWF23

Front to back **6 11/16"**
 Height **5 13/16"**
Laminar flow 5.7 Lpm/1.5 gpm
 Includes ozone generator unit with plug-in transformer.
 Requires thermostatic mixing valve, not included.
 Recommended: MEDI-MIX.
 Certified to ASME A112.18.1/B125.1, UL1951, UL979 for ozone features, and CSA C22.2, Numbers 68 and 14.

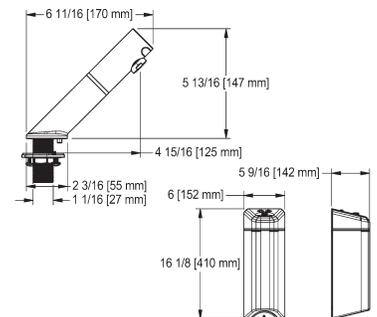


\$ 4,408



Ozo-flo touch free faucet, deck mount, high neck angled HWF43

Front to back **8 7/8"**
 Height **10 3/16"**
Laminar flow 5.7 Lpm/1.5 gpm
 Includes ozone generator unit with plug-in transformer.
 Requires thermostatic mixing valve, not included.
 Recommended: MEDI-MIX.
 Certified to ASME A112.18.1/B125.1, UL1951, UL979 for ozone features, and CSA C22.2, Numbers 68 and 14.

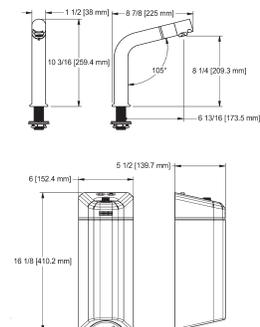

\$ 4,648



Accessories for Medi-flo & Ozo-flo



Mixing valve

MEDI-MIX

Optional thermostatic mixing valve pre-programmed for Medi-flo HWSS2321W-00 sink and Ozo-flo faucets HWF05, HWF23, and HWF43. Adjustable outlet temperature range: 95 – 118°F (35 – 48°C). Factory set temperature 95°F (40°C).

\$ 401



Replacement shroud for Medi-flo

MEDI-SHR

Removable replacement shroud for HWSS2321W-00 Medi-flo sink. White polymer composite material.

\$ 1,017



In-wall carrier for Medi-flo & Nightingale Elite

IWC2104


Floor mounted in-wall carrier designed for Medi-flo (HWSS2321W-00) sink and the new Nightingale Elite sinks (AHWSS2321WDM).

Preset stud locations simplify installation.

Steel uprights with welded feet.

Integrated rough in box. Hardware included.

\$ 518

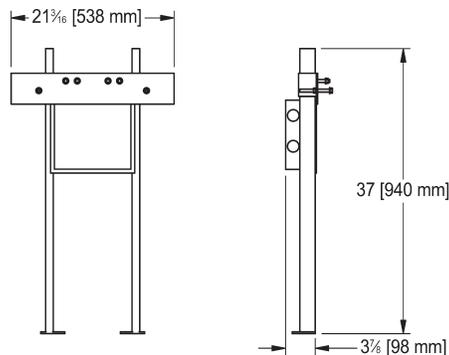

Nightingale Sinks



Pictured: AHWSS1720W-G Nightingale sink with faucet



Hand hygiene sink AHWSS1720W-00

White solid surface hand hygiene sink with removable shroud. Sink is made of non-porous cast material with antimicrobial resin. An anti-splash feature runs through the center of the sink to greatly reduce splashing. Bowl is sloped towards drain and the sink rim is shaped to prevent users from placing objects on it. Hand hygiene sinks are specifically designed for hand washing only. Accepts single hole faucets with lower mounting hardware less than 2 1/2" (63 mm) in diameter.




Left rear 1 1/2" (DN 40) waste location, supplied with waste assembly. Sink is cUPC certified and compliant with CSA B45.5-11/IAPMO Z124-2011. Meets and exceeds various national healthcare standards; ie, CSAZ8000, CSAZ317.1-16. Wheelchair accessible: meets ADA, ANSI A117.1 and CSA B651-04 (check local codes to ensure compliance).

Outside dimensions **16 15/16 x 20 1/8 x 21 1/2"**

Inside bowl **15 1/4 x 18 5/8 x 9"**

Waste location **Left Rear**

\$ 2,345



Optional Accessories

IWC2203

In-wall carrier

See details on p. 55



Nightingale hand hygiene sinks



Hand hygiene sink with hands-free gooseneck faucet AHWSS1720W-G

White solid surface hand hygiene sink with removable shroud. Sink is made of non-porous cast material with antimicrobial resin. An anti-splash feature runs through the center of the sink to greatly reduce splashing. Bowl is sloped towards drain and the sink rim is shaped to prevent users from placing objects on it. Hand hygiene sinks are specifically designed for hand washing only.

Left rear 1 1/2" (DN 40) waste location, supplied with waste assembly.

Hands free gooseneck **faucet** included. Faucet can be powered with included plug in transformer or with included battery pack which will last approximately 100,000 cycles on 4 x AA batteries (AC or DC or AC with battery backup). Flow rate 6 Lpm (1.5gpm) laminar flow.

Faucet is certified to ASME A112.18.1/CSA B125.1.


Sink is cUPC certified and compliant with CSA B45.5-11/IAPMO Z124-2011. Meets and exceeds various national healthcare standards; ie, CSAZ8000, CSAZ317.1-16.

Wheelchair accessible: meets ADA, ANSI A117.1 and CSA B651-04 (check local codes to ensure compliance).

Outside dimensions **16 15/16 x 20 1/8 x 30 3/8"**

Inside bowl **15 1/4 x 18 5/8 x 9"**

Waste location **Left Rear**

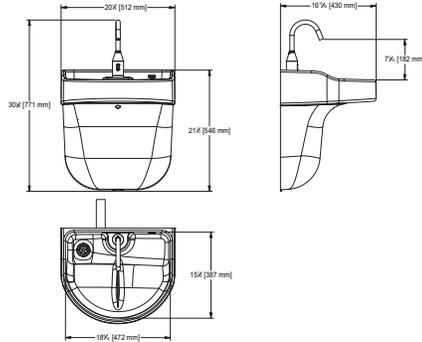

\$ 2,574

Optional Accessories

IWC2203

In-wall carrier

See details on p. 55




27811170

Hardwire kit

See details on p. 68



Nightingale Elite hand hygiene sinks

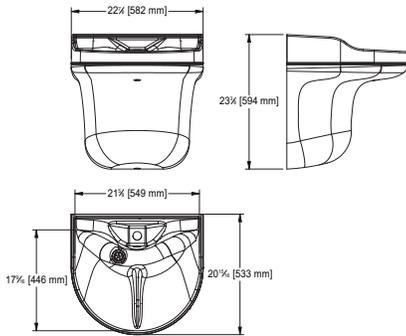

Hand hygiene sink AHWSS2321WDM-00

White solid surface hand hygiene sink with removable shroud. Sink is made of non-porous cast material with antimicrobial resin.

An anti-splash feature runs through the center of the sink to greatly reduce splashing. Bowl is sloped towards drain and the sink rim is shaped to prevent users from placing objects on it. Hand hygiene sinks are specifically designed for hand washing only.

Accepts single hole faucets with lower mounting hardware less than 2 1/2" (63 mm) in diameter.

Left rear 1 1/2" (DN 40) waste location, supplied with waste assembly.

Sink is cUPC certified and compliant with CSA B45.5-11/IAPMO Z124-2011. Meets and exceeds various national healthcare standards; ie, CSAZ8000, CSAZ317.1-16.

Wheelchair accessible: meets ADA, ANSI A117.1 and CSA B651-04 (check local codes to ensure compliance).

Outside dimensions **20 15/16 x 22 7/8 x 23 3/8"**

Inside bowl **17 9/16 x 21 5/8 x 9"**

Waste location **Left Rear**


\$ 2,863

Optional Accessories

IWC2104

In-wall carrier

See details on p. 47

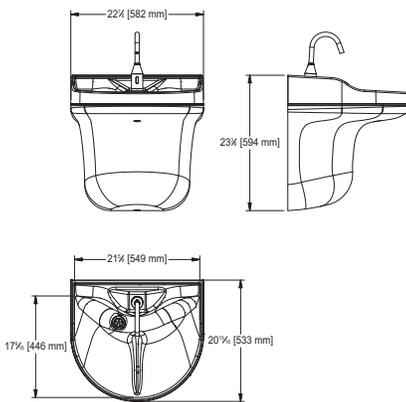

Hand hygiene sink with hands-free gooseneck faucet AHWSS2321WDM-G

White solid surface hand hygiene sink with removable shroud. Sink is made of non-porous cast material with antimicrobial resin. An anti-splash feature runs through the center of the sink to greatly reduce splashing. Bowl is sloped towards drain and the sink rim is shaped to prevent users from placing objects on it. Hand hygiene sinks are specifically designed for hand washing only.

Left rear 1 1/2" (DN 40) waste location, supplied with waste assembly.

Hands free gooseneck **faucet** included. Faucet can be powered with included plug in transformer or with included battery pack which will last approximately 100,000 cycles on 4 x AA batteries (AC or DC or AC with battery backup). Flow rate 6 Lpm (1.5gpm) laminar flow.

Faucet is certified to ASME A112.18.1/CSA B125.1.

Sink is cUPC certified and compliant with CSA B45.5-11/IAPMO Z124-2011. Meets and exceeds various national healthcare standards; ie, CSAZ8000, CSAZ317.1-16.

Wheelchair accessible: meets ADA, ANSI A117.1 and CSA B651-04 (check local codes to ensure compliance).

Outside dimensions **20 15/16 x 22 7/8 x 31 3/8"**

Inside bowl **17 9/16 x 21 5/8 x 9"**

Waste location **Left Rear**

\$ 3,375

Optional Accessories

IWC2104

In-wall carrier

See details on p. 47

27811170

Hardwire kit

See details on p. 68



Premium surgical scrub units



Premium surgical scrub sink, 16" wide SSU1-2016-3

16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Radius covered bowl corners. Access panel for service and maintenance. Integral 1 1/2" (38 mm) waste with threaded tailpiece for use with McGuire 155WC tailpiece.


Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **19 3/4 x 16 x 28"**

Inside bowl **15 x 13 x 10"**

Waste location **Center**

\$ 12,113

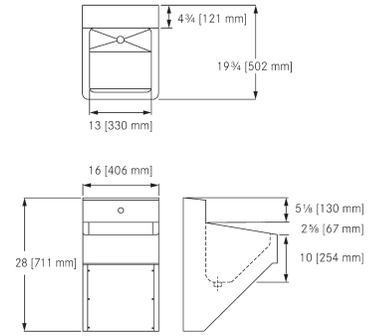

Premium surgical scrub sink, 20" wide SSU1-2020-3

16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Radius covered bowl corners. Access panel for service and maintenance. Integral 1 1/2" (38 mm) waste with threaded tailpiece for use with McGuire 155WC tailpiece.


Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **19 3/4 x 20 x 28"**

Inside bowl **15 x 17 x 10"**

Waste location **Center**

\$ 12,459

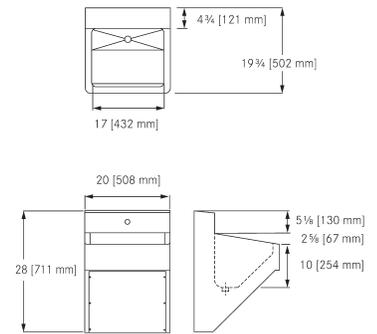

Premium surgical scrub sink, 40" wide SSU2-2040-3

16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Radius covered bowl corners. Divider is removable for thorough cleaning. Access panel for service and maintenance. Integral 1 1/2" (38 mm) waste with threaded tailpiece for use with McGuire 155WC tailpiece.


Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **19 3/4 x 40 x 28"**

Inside bowl **15 x 18 7/16 x 10"**

Waste location **Center**

\$ 16,959

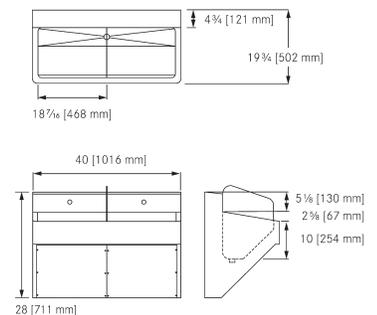


Classic surgical scrub sinks



Classic scrub sink, single SSU1-00

Single compartment surgical scrub station. 16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Bowl slopes from 10" to 12" from right to left. Access panel for service and maintenance. Franke hygienic 1 1/2" (38 mm) offset waste with integral tailpiece (no separate waste fitting required). Supplied with wall hanger brackets. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **23 x 30 x 26"**
Inside bowl **17 1/2 x 27 x 12"**
Waste location **Left Back**

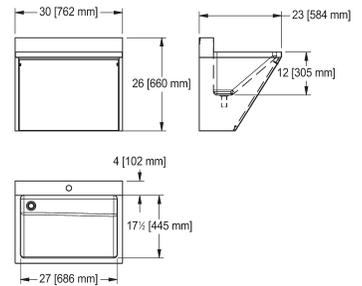


\$ 9,749



Classic scrub sink, double SSU2-00

Double compartment surgical scrub station. 16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Bowl slopes from 12" to 14" from right to left. Removable divider with no tracks in bowl. Access panel for service and maintenance. Franke hygienic 1 1/2" (38 mm) offset wastes with integral tailpieces (no separate waste fittings required). Supplied with wall hanger brackets. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **23 x 60 x 26"**
Inside bowl **17 1/2 x 57 x 14"**
Waste locations **Left and Center**

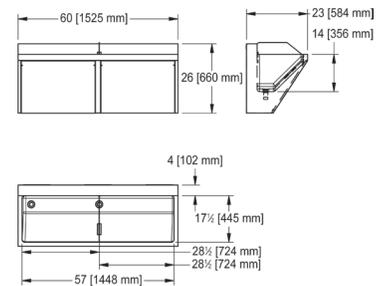


\$ 14,090



Classic scrub sink, triple SSU3-00

Triple compartment surgical scrub station. 16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Bowl slopes from 10" to 14" from right to left. Removable dividers with no tracks in bowl. Access panel for service and maintenance. Franke hygienic 1 1/2" (38 mm) offset wastes with integral tailpieces (no separate waste fittings required). Supplied with wall hanger brackets. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **23 x 90 x 26"**
Inside bowl **17 1/2 x 87 x 14"**
Waste location **Left, Center and Center**

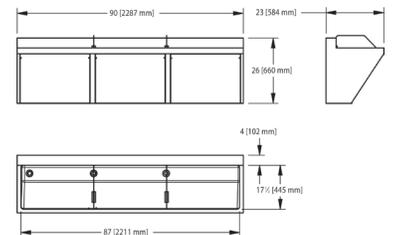

\$ 20,122

Classic surgical scrub sink bundles with valves and hands-free faucets



Classic scrub sink bundle, single SSU1-10

Single compartment surgical scrub station. 16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Bowl slopes from 10" to 12" from right to left. Access panel for service and maintenance. Franke hygienic 1 1/2" (38 mm) offset waste with integral tailpiece (no separate waste fitting required). Supplied with wall hanger brackets. Certified to ASME A112.19.3/CSA B45.4.


Outside dimensions **23 x 30 x 26"**

Inside bowl **17 1/2 x 27 x 12"**

Waste location **Left Back**

Sink bundle includes:

- 1 - **MIX-LF** thermostatic mixing valve
- 1 - **HHF180-6L** gooseneck hands-free faucet

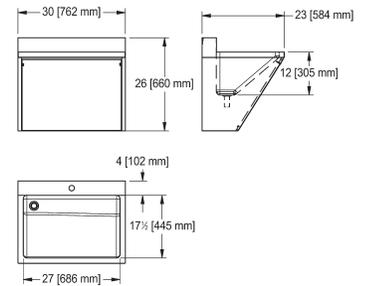

\$ 10,666



Classic scrub sink bundle, double SSU2-10

Double compartment surgical scrub station. 16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Bowl slopes from 12" to 14" from right to left. Removable divider with no tracks in bowl. Access panel for service and maintenance.

Franke hygienic 1 1/2" (38 mm) offset wastes with integral tailpieces (no separate waste fittings required). Supplied with wall hanger brackets. Certified to ASME A112.19.3/CSA B45.4.


Outside dimensions **23 x 60 x 26"**

Inside bowl **17 1/2 x 57 x 14"**

Waste locations **Left and Center**

Sink bundle includes:

- 2 - **MIX-LF** thermostatic mixing valves
- 2 - **HHF180-6L** gooseneck hands-free faucets

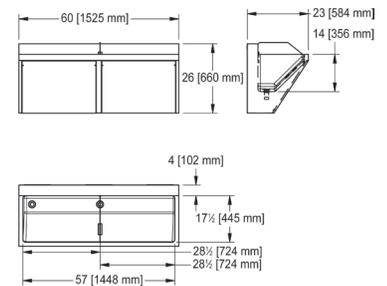

\$ 16,468



Classic scrub sink bundle, triple SSU3-10

Triple compartment surgical scrub station. 16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Bowl slopes from 10" to 14" from right to left. Removable dividers with no tracks in bowl. Access panel for service and maintenance.

Franke hygienic 1 1/2" (38 mm) offset wastes with integral tailpieces (no separate waste fittings required). Supplied with wall hanger brackets. Certified to ASME A112.19.3/CSA B45.4.


Outside dimensions **23 x 90 x 26"**

Inside bowl **17 1/2 x 87 x 14"**

Waste location **Left, Center and Center**

Sink bundle includes:

- 3 - **MIX-LF** thermostatic mixing valves
- 3 - **HHF180-6L** gooseneck hands-free faucets

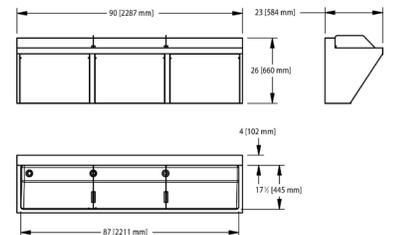

\$ 23,794

Clinical Wash Basins




Clinical wash basin, for splash mount faucet HWSS1518P-00

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Constructed with an integral shroud. High back and side walls contain splashing and protect adjacent surfaces from contamination. Integral 1 1/2" (38 mm) waste welded to bottom of the sink bowl. Waste is left open and shaped to prevent the insertion of plugs or strainers to comply with national healthcare guidelines. This fixture has antimicrobial nanocoating product protection on all exposed surfaces of the sink. Recommended splash mount faucet **HHF180-6L-W**. Certified to ASME A112.19.3/CSA B45.4. Z8000 compliant.

Outside dimensions **18 x 15 x 28 5/8"**
 Inside bowl **14 x 14 x 10"**
 Waste location **Right Back**

\$ 2,860

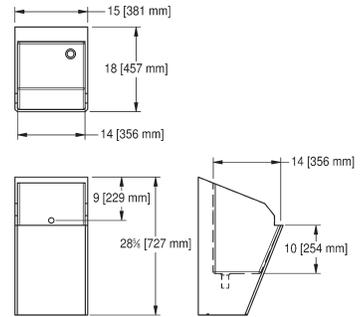


Clinical wash basin, dual mount faucet options HWS1414P-00

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Constructed with an integral shroud. High back and side walls contain splashing and protect adjacent surfaces from contamination. Integral 1 1/2" (38 mm) waste welded to bottom of the sink bowl. Waste is left open and shaped to prevent the insertion of plugs or strainers to comply with national healthcare guidelines. This fixture is coated with antimicrobial product protection on all exposed surfaces of the sink. Recommended deck mount faucet **HHF180-6L**. Certified to ASME A112.19.3/CSA B45.4. Z8000 compliant.

Outside dimensions **18 3/4 x 15 x 18 1/2"**
 Inside bowl **14 x 14 x 10"**
 Waste locations **Left Back**


\$ 3,034

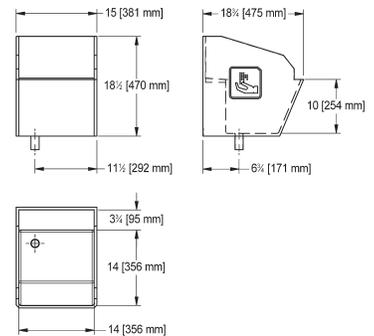

Shroud for HWS1414P-00 & HWSS1518P-00 HWS-RS-00

Stainless steel removable shroud for HWS1414P-00 and HWSS1518P-00 clinical wash basins. Overall dimensions **13 1/2 x 14 1/2 x 10"**

\$ 525

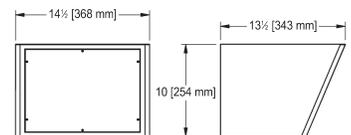

Clinical Wash Basins



Clinical wash basin, large back splash HWS1420P-00


18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Offset waste with open access to allow for easy cleaning of P-Trap. Integral 1 1/2" (38 mm) waste welded to bottom of the sink bowl.

This fixture is coated with antimicrobial product protection on all exposed surfaces of the sink. Recommended deck mount faucet **HHF180-6L**. Certified to ASME A112.19.3/CSA B45.4. Z8000 compliant.

Outside dimensions **19 3/16" x 21" x 37 15/16"**

Inside bowl **14" x 20" x 10"**

Waste location **Left Back**

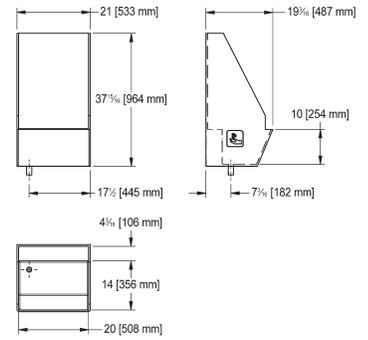

\$ 4,795



Clinical wash basin, wheelchair accessible AWHB1414P-3


18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Offset waste with open access to allow for easy cleaning of P-Trap. Integral 1 1/2" (38 mm) waste welded to bottom of the sink bowl.

Wheelchair accessible: meets ADA, ANSI A117.1. Certified to ASME A112.19.3/CSA B45.4. Z8000 compliant.

Outside dimensions **17 9/16" x 14 5/16" x 15 1/16"**

Inside bowl **14 3/8" x 14" x 9 1/16"**

Waste location **Left Back**

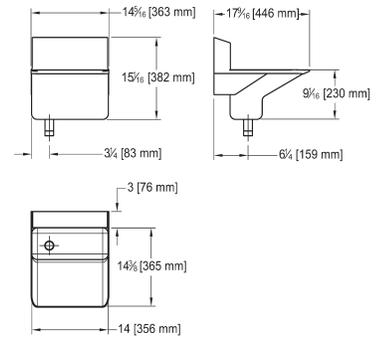

\$ 8,161




In-wall carrier for wall hung basins IWC2203

Universal floor mounted in-wall carrier designed for wall hung basins and water coolers. Steel uprights with welded feet. Includes lower bracket for added support. Mounting hardware included.

Outside dimensions **7 7/16" x 23 7/8" x 42"**

\$ 491

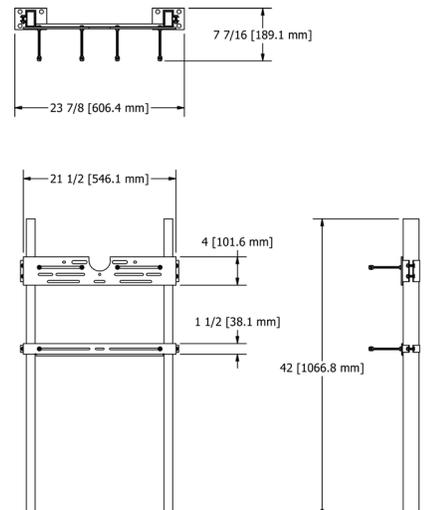

Dual mount medical hand wash sinks




Topmount or undermount single bowl medical hand wash sink HWS0610P-3

Single compartment self rimming topmount (or undermount) medical hand wash sink with faucet ledge. 18 gauge (1.2 mm), type 304 stainless steel. Sink compartment is angled to reduce splashing and waste is offset to reduce the risk of any bacteria contamination and splashing. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, sound deadening pads, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4. Includes 1 1/2" (38 mm) duplex waste assembly and 1 1/2" (DN38) tailpiece.

Custom, non-returnable
Outside dimensions **12 1/8 x 18 3/16"**
Inside bowl **10 x 16 x 10"**
Waste location **Right rear**

\$ 994

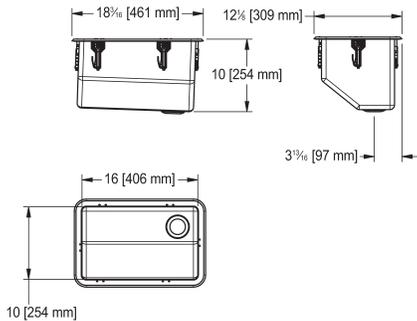


Topmount or undermount single bowl medical hand wash sink with faucet ledge HWS6810P-3

Single compartment self rimming topmount (or undermount) medical hand wash sink with faucet ledge. 18 gauge (1.2 mm), type 304 stainless steel. Sink compartment is angled to reduce splashing and waste is offset to reduce the risk of any bacteria contamination and splashing. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, sound deadening pads, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.

Includes 1 1/2" (38 mm) duplex waste assembly and 1 1/2" (DN38) tailpiece.
Custom, non-returnable.

Outside dimensions **21 1/2 x 20"**
Inside bowl **16 x 18 x 10"**
Waste location **Right rear**

\$ 1,334

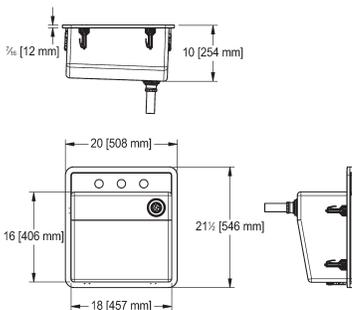


Hand Wash Basins



Pictured: AWHBS2419-7 basins with HHF23T faucets

Designer, semi-public hand wash basins

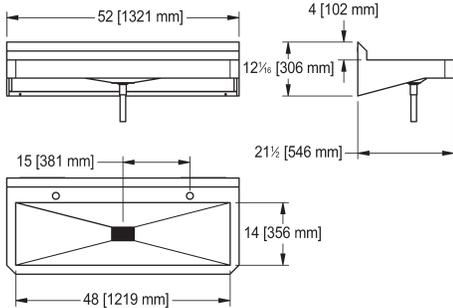

Designer double hand wash basin WHB5222-7

Designer wall hung basin. 16 gauge (1.8 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are polished to a #4 satin finish. Includes 1 1/4" (DN 32) waste fitting included. Features a vandal-resistant laser cut pyramid waste cover. Unit is installed using supplied wall brackets. Optional wall carrier IWC2203 is available. Certified to ASME A112.19.3/CSA B45.4.

Optional shroud WHB5222-RS

Wheelchair accessible: meets ADA (Americans with disabilities act guidelines), ANSI A117.1 (Accessible and usable buildings and facilities), and CSA B651-04. Check local codes to ensure compliance.

Outside dimensions **21 1/2 x 52 x 12 1/16"**

Inside bowl **21 1/2 x 48 x 5"**

Waste location **Center**

\$ 3,885



Removable shroud for WHB5222-7 WHB5222-RS

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Satin finish.

Shroud extends 20 9/16" below the bottom of the basin.

Outside dimensions **21 5/16 x 7 x 20 5/8"**

\$ 734

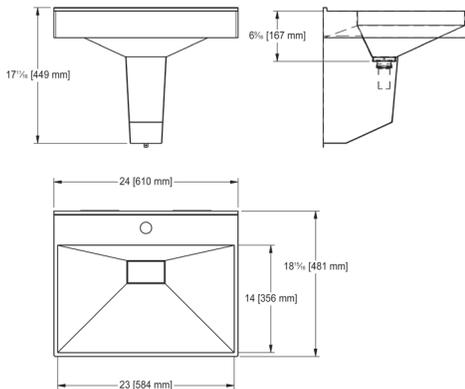

Cleopatra single bowl hand wash basin AWHBS2419-7

Designer wall hung basin. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are polished to a #4 satin finish. Basin features vandal-resistant waste cover attached via concealed cable. Integral grid waste opening and threaded connection underneath to accept a 1 1/2" tailpiece (included). Separate waste fitting not required.

Basin is installed using supplied wall brackets, recommended in-wall carrier IWC2203 sold separately.

Certified to ASME A112.19.3/CSA B45.4. Wheelchair accessible: meets ADA (Americans with Disabilities Act) guidelines, ANSI A117.1 (Accessible and usable buildings and facilities), and CSA B651-04 (Accessible design for the built environment). Check local codes to ensure compliance.

Outside dimensions **18 15/16 x 24 x 17 11/16"**

Inside bowl **16 x 14 x 6 9/16"**

Waste location **Center back**

\$ 1,951


Optional wall carrier

IWC2203

In-wall carrier

See details on p. 55





**Wheelchair accessible wall hung basin
AWHB220W-3-1**

Single wash basin made from a unique Franke resin-bonded solid surface material with pore-free, smooth UV resistant gelcoat with high-polish surface. Shallow basin featuring a splash reduction rib. 1 1/2" grid waste included. Unit is installed using supplied wall hanger brackets.

Optional in-wall carrier IWC2203 is available.

cUPC certified and compliant with CSA B45.5- 11/IAPMO Z124-2011.

Wheelchair accessible: meets ADA (Americans with Disabilities Act), ANSI A117.1 (Accessible and usable buildings and facilities) and CSA B651-04 (check local codes to ensure compliance).

Outside dimensions **18 15/16 x 24 x 17 11/16"**

Inside bowl **16 x 14 x 6 9/16"**

Waste location **Center back**

\$1,553

Optional wall carrier

IWC2203

In-wall carrier

See details on p. 55




Designer, semi-public hand wash basins



Designer hand wash basin, no overflow WHB2221-7

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finish. Designed for either new installation or replacement/retrofit onto select vitreous china wall carriers. Edge is formed as an anti-spill rim. Includes one piece wall hanger bracket. 1 1/4" (32 mm) grid strainer waste kit included. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **20^{15/16} x 21 1/2 x 11 1/4"** Inside bowl **13 x 14 1/2 x 5"** Waste location **Center back** Overflow **No**


\$ 1,506

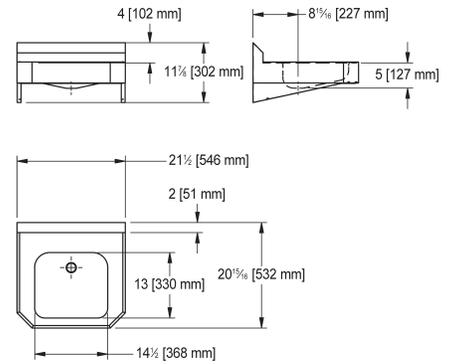

Designer hand wash basin, with overflow WHB2221-8

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finish. Designed for either new installation or replacement/retrofit onto select vitreous china wall carriers. Edge is formed as an anti-spill rim. Includes one piece wall hanger bracket. Accepts 1 1/4" (32 mm) waste kit with overflow (not included). Order model #3700. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **20^{15/16} x 21 1/2 x 11 1/4"** Inside bowl **13 x 14 1/2 x 5"** Waste location **Center back** Overflow **Yes**


\$ 1,506

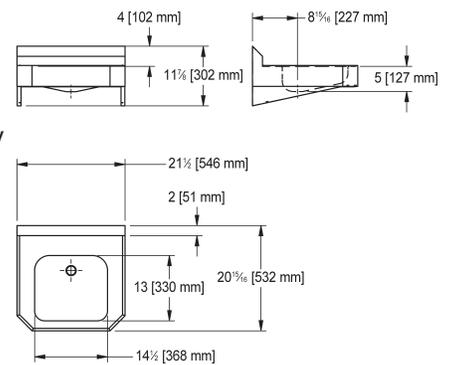

Removable shroud for WHB2221 basins WHB2221-RS

Gauge 18
Satin finish Stainless Steel
Outside dimensions **11 1/4 x 8 x 14 7/8"**

\$ 391

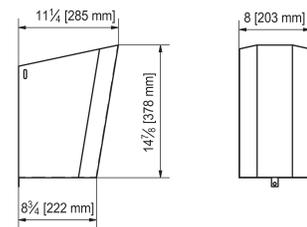

Cover plate for WHB2221-RS shroud WHB2221-UC

Bottom cover plate for WHB2221-RS shroud prevents unwanted access to plumbing fixtures. Overall dimensions **21 x 21"**

\$ 293



Designer, semi-public hand wash basins





Designer basin WT400C-7

Designer single wash basin for wall mounting. 19 gauge (1.0 mm) seamless welded bowl. Front panel has 45° corner edges.

Exposed surfaces are polished to a satin finish. Accepts 1 1/4" (32 mm) waste kit, not included. Basin is installed using prewelded mounting brackets. Optional shroud **WT-RS** available. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **17 13/16 x 15 3/4"** Inside bowl **12 x 13 3/8 x 5 9/16"** Waste location **Center back**

\$1,340





Corner wall mount hand wash basin WT310E-7

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel.

Exposed surfaces are brushed finish. Includes installation kit. Accepts 1 1/4" (32 mm) waste kit, not included. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **12 3/16 x 12 3/16"** Inside bowl **6 1/8 x 11 7/16 x 4 3/4"** Waste location **Center**

\$1,019





Designer basin WT500C-7

Designer single wash basin for wall mounting. 19 gauge (1.0 mm) seamless welded bowl. Front panel has 45° corner edges.

Exposed surfaces are polished to a satin finish. Accepts 1 1/4" (32 mm) waste kit, not included. Basin is installed using prewelded mounting brackets. Optional shroud **WT-RS** available. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **17 9/16 x 19 11/16"** Inside bowl **11 7/16 x 15 3/4 x 5 9/16"** Waste location **Center back**

\$1,500





Designer, semi-public hand wash basins




Designer basin WT600C-7

Designer single wash basin for wall mounting.
19 gauge (1.0 mm) seamless welded bowl.
Front panel has 45° corner edges.
Exposed surfaces are polished to a satin finish.
Accepts 1 1/4" (32 mm) waste kit, not included.
Basin is installed using prewelded mounting brackets.
Wheelchair accessible.
Optional shroud **WT-RS** available.
Certified to ASME A112.19.3/CSA B45.4.
Outside dimensions **18 7/8 x 23 5/8"**
Inside bowl **13 3/8 x 21 1/4 x 5 3/4"**
Waste location **Center back**

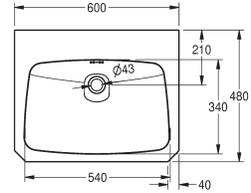


\$1,624

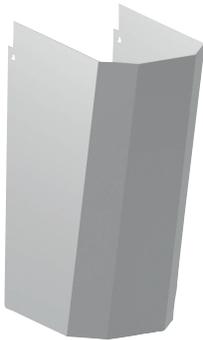

Shroud for WT400C/WT500C/WT600C basins WT-RS

Trap cover manufactured from 18 gauge, type 304 stainless steel. Exposed surfaces are satin finished. For wall mount installation of wash basin models WT400C, WT500C, WT600C and WHB1617 series.
Outside dimensions **10 1/2 x 6 1/2 x 15 3/4"**

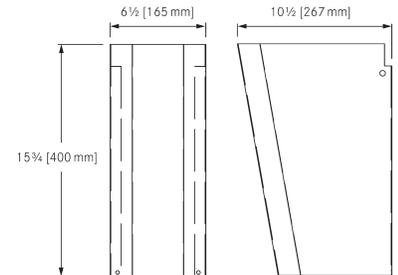


\$ 911

Hand wash basins, institutional



For wall mount faucet, 6" deep WHB1616-3

Gauge **18**
Outside dimensions **16 1/4 x 17"**
Inside bowl **12 x 14 x 6"**
#4 satin finish
Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper.
One piece wall hanger included, separate sink carrier not required.
Optional shroud **WT-RS** sold separately
Waste location **Center back**

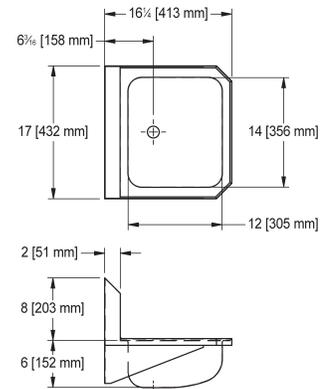

\$1,023

Hand wash basins, institutional



Wall hung basin, 1 1/2" waste WHB1617-3

Gauge 18

Outside dimensions 17 x 16 1/2"

Inside bowl 12 x 14 x 6"

#4 satin finish


Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper.

One piece wall hanger included, separate sink carrier not required.

Optional shroud **WT-RS** sold separately

Waste location **Center back**

\$1,322

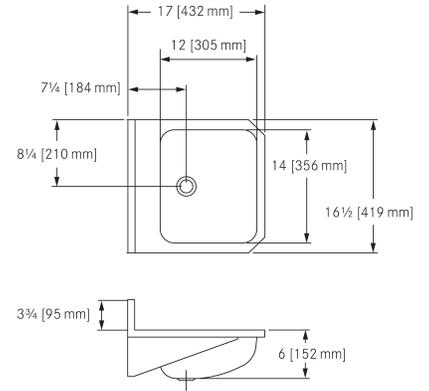

Wall hung basin, 1 1/4" waste WHB1617-7

Gauge 18

Outside dimensions 17 x 16 1/2"

Inside bowl 12 x 14 x 6"


#4 satin finish

Accepts 1 1/4" (32 mm) waste assembly, not included.

Optional shroud **WT-RS** sold separately

Waste location **Center back**

\$1,294

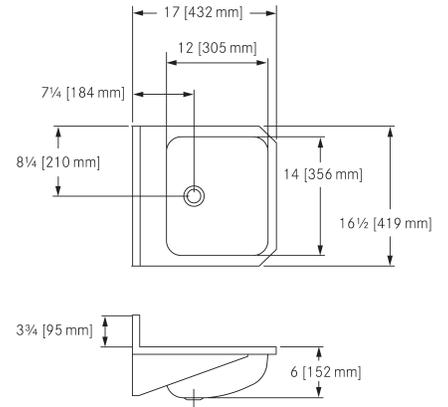

Hand wash basins, institutional



Wall hung basin, 1 1/2" waste WHB1819-3

Wash basin for wall mounting. 18 gauge (1.2 mm) stainless steel. Exposed surfaces are polished to a #4 satin finish.

Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper.

16 gauge side wall brackets and one piece wall hanger. Separate sink carrier is not required.


Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **19 x 18 1/2"**

Inside bowl **14 x 16 x 7"**

Waste location **Center**

\$1,396

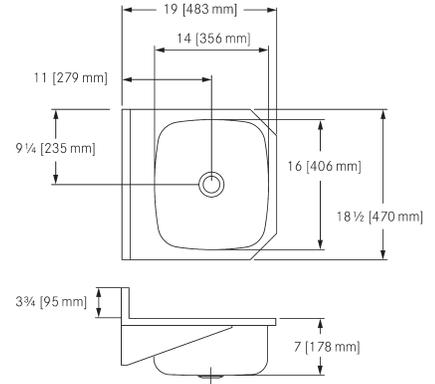

Wall hung basin, 1 1/4" waste WHB1819-7

Wash basin for wall mounting. 18 gauge (1.2 mm) stainless steel. Exposed surfaces are polished to a #4 satin finish.

Accepts 1 1/4" (32 mm) waste assembly, not included.

16 gauge side wall brackets and one piece wall hanger. Separate sink carrier is not required.


Certified to ASME A112.19.3-2008 / CSA B45.4-08

Outside dimensions **19 x 18 1/2"**

Inside bowl **14 x 16 x 7"**

Waste location **Center**

\$1,359

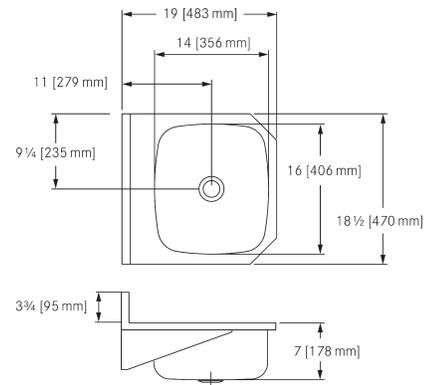

Hand wash basin with side side splashes WHB1716SPL-3

20 gauge (0.9 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finish.

Radius covered bowl corners.

Includes one piece wall hanger bracket.

Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper.


Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **15 1/2 x 16 3/4 x 13"**

Inside bowl **9 1/4 x 12 x 6"**

Waste location **Center**

\$1,503

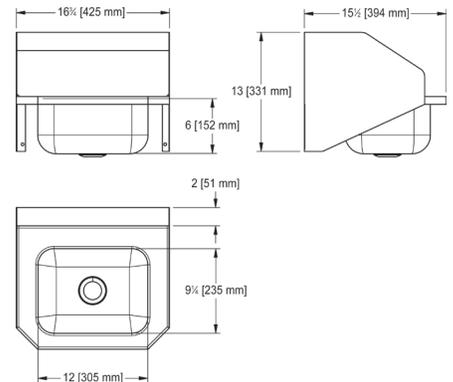

Hand wash basins, institutional



Hand wash basin, 20 gauge WHB1716-3

20 gauge (0.9 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finish.

Radius coved bowl corners.

Includes one piece wall hanger bracket.

Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper.



Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **15 1/2 x 16 3/4 x 12 3/4"**

Inside bowl **9 1/4 x 12 x 6"**

Waste location **Center**

\$ 1,237

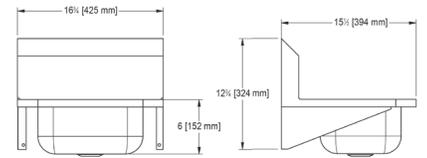

Hand wash basin with shroud WHBS181910-3

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finish.

Includes one piece wall hanger bracket. Separate sink carrier not required.

Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper.



Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **19 x 16 x 14 1/2"**

Inside bowl **14 x 16 x 10"**

Waste location **Center**

\$ 3,262

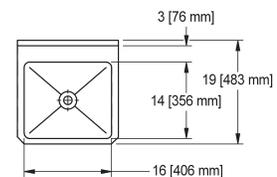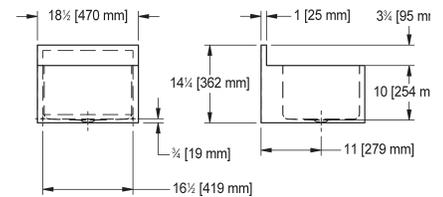

Wall service sink, 14 gauge WSS6713

14 gauge (2.0 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finish.

Radius coved bowl corners.

Includes 3 1/2" (89 mm) crumb cup strainer waste kit with 1 1/2" stainless steel tailpiece.



Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **19 x 20 x 25"**

Inside bowl **16 x 17 x 13"**

Waste location **Center**

\$ 7,768

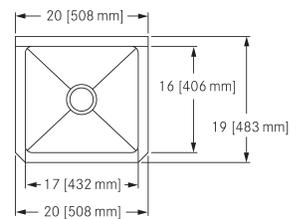


Washroom Accessories



67	Faucets
69	Washroom accessories
70	Aqua-foam soap dispensers
71	Multi-feed soap dispensers

Faucets




Aquarius wall mount AC powered faucet AT02-005AC

Polished finish, regular flow 5 Lpm/ 1.3 gpm

Type 316 stainless steel hands-free faucet. Wall mount installation, high polish finish. AC plug-in power option.

Highly intelligent electronic controls with programmable sensor ranges, run times, and automatic purging to eliminate stagnant water. Certified to ASME A112.18.1 / CSA B125.1
Faucet dimensions 1 1/2 x 5 7/8"

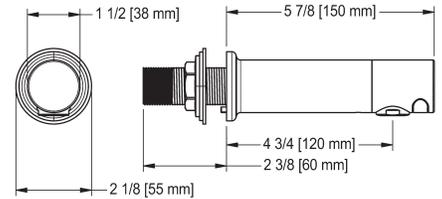

\$ 1,637




Aquarius wall mount DC powered faucet AT02-005DC

Polished finish, regular flow 5 Lpm/ 1.3 gpm

Type 316 stainless steel hands-free faucet. Wall mount installation, high polish finish. DC battery power option.

Highly intelligent electronic controls with programmable sensor ranges, run times, and automatic purging to eliminate stagnant water. Certified to ASME A112.18.1 / CSA B125.1
Faucet dimensions 1 1/2 x 5 7/8"

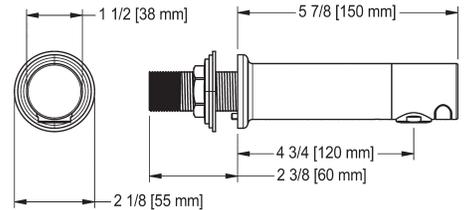

\$ 1,707



cUPC®

Mixing valve MIX-LF

Thermostatic mixing valve for use with Franke faucets.

\$ 362

Faucets




Electronic faucet, temperature adjust handle HHF23T

Hands free faucet for deck mounting with IR sensor near faucet base. 5.7 Lpm/ 1.5 gpm flow rate. Flat stop style with temperature adjust handle on side. Chrome finish. Battery operated (DC) or plug in (AC) with battery backup. The battery life is around 100,000 cycles if running on battery only. Certified to ASME A112.18.1 / CSA B125.1

Faucet dimensions **1⁵/₈ x 7 x 5⁷/₈"**

\$ 1,011

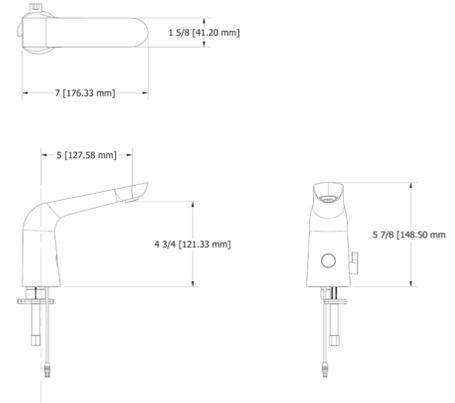


Laminar flow deck mount faucet HHF180-6L

Hands free faucet for deck mounting with IR sensor. Open spout, free of flow control or aerators. Chrome finish. 6.0 Lpm/ 1.5 gpm laminar flow rate. Supplied 6VDC plug in transformer included. Easy topmount installation. Automatic anti-vandal timeout. Certified to ASME A112.18.1 / CSA B125.

Overall dimensions **2 x 5¹/₄ x 10¹/₄"**

\$ 1,043

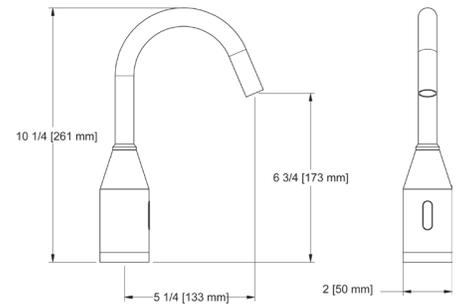


Laminar flow wall mount faucet HHF180-6L-W

Hands free faucet for wall mounting with IR sensor. Open spout, free of flow control or aerators. Chrome finish. 6.0 Lpm/ 1.5 gpm laminar flow rate. Supplied 6VDC plug in transformer included. Easy topmount installation. Automatic anti-vandal timeout. Certified to ASME A112.18.1 / CSA B125.

Overall dimensions **2 x 7¹/₄ x 11"**

\$ 1,147

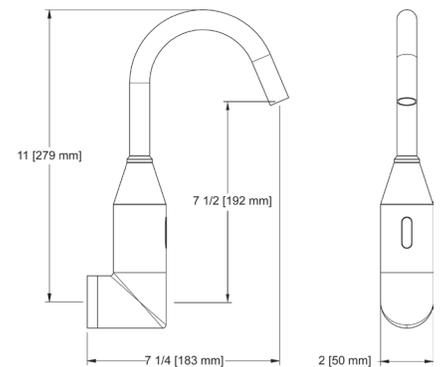


Hardwire kit for HHF180-series faucets 27811170

Power up to 6 faucets with one transformer. 100-240V 50/60Hz 0.8A input. Output is 6VDC 2.0A.

Class II cULus approved. Transformer cable length **60"** (1500mm). Wye cable length **60"** (1500mm) with **11³/₄"** (300mm) branch to each control box.

\$ 268

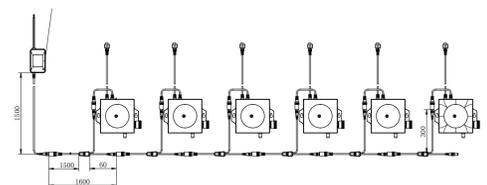

Washroom accessories




Back rest CM-16104

Back rest for wall mount toilet. Stainless steel bar with #4 satin finish with flanges and covers, with antique white solid core plastic laminate panel back. Concealed snap flanges and mounting hardware included. Provide adequate backing in wall for support and comply to local codes for barrier free requirement.

Dimensions **8 5/8 x 12 x 4"**

\$ 504

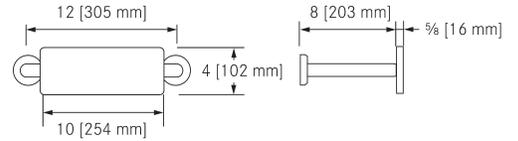


Back rest, for standard installations CM-16104-WM

Back rest for wall mount toilet for industry standard spud location. Stainless steel bar has #4 satin finish with flanges and covers, with antique white solid core plastic laminate panel back. Concealed snap flanges and mounting hardware included. Provide adequate backing in wall for support and comply to local codes for barrier free requirement.

Dimensions **6 x 12 x 4"**

\$ 504

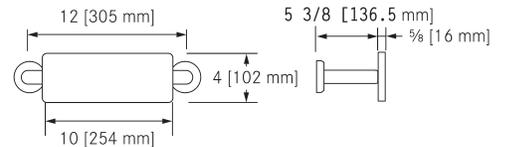

Aqua-foam soap dispensers





Foam soap dispenser, wall mount

Polished finish with light ring

SD01-001CFL

Stainless steel touch-free soap dispenser. AC powered (plug in) LED status light to notify of sensor blockage, soap level or if the wrong type of soap is used. Soap dispenser will dispense once every 48 hours if there is no action in between to avoid a clog in the tip. 1.5 liter (50 fl oz.) easy refill soap tank included. Overall dimensions 4 15/16 x 1 x 1"

\$ 943

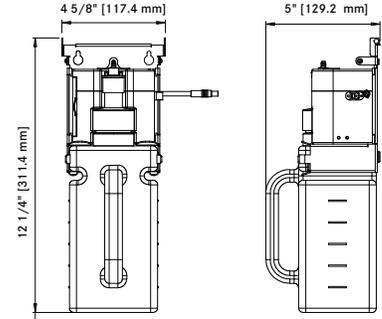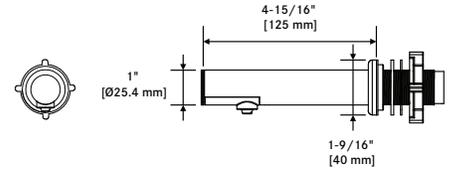

Foam soap dispenser, wall mount

Satin finish with light ring

SD01-001SFL

\$ 924



Foam soap dispenser, deck mount

Polished finish with light ring

SD01-003CFL

Stainless steel touch-free soap dispenser. AC powered (plug in) LED status light to notify of sensor blockage, soap level or if the wrong type of soap is used. Soap dispenser will dispense once every 48 hours if there is no action in between to avoid a clog in the tip. 1.5 liter (50 fl oz.) easy refill soap tank included. Overall dimensions 5 9/16 x 1 x 6 5/8"

\$ 961

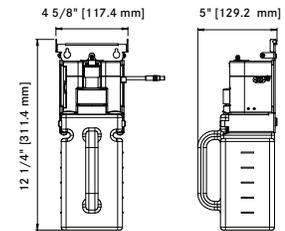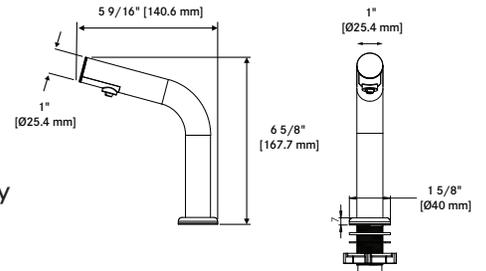

Foam soap dispenser, deck mount

Satin finish with light ring

SD01-003SFL



\$ 981

Foam soap dispenser, deck mount

SD01-002CF

Stainless steel touch-free soap dispenser. Requires either AC power or DC battery power to operate the soap dispenser. Soap dispenser will dispense once every 48 hours if there is no action in between to avoid a clog in the tip. 1.5 liter (50 fl oz.) easy refill soap tank included. Overall dimensions 5 3/8 x 1 1/2 x 3 13/16"

\$ 831

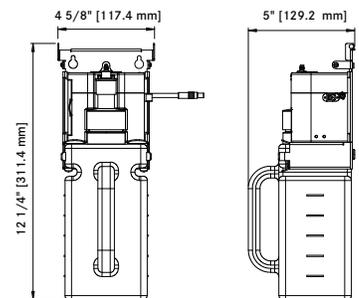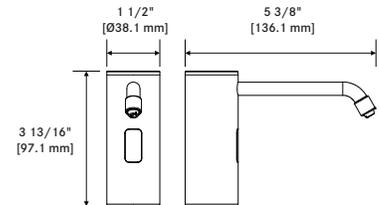

Foam soap dispenser, deck mount

Satin finish

SD01-002SF

\$ 809



Aqua-foam soap dispensers - multifeed



Model SD01-001 shown




Model SD01-003 shown



Model SD01-002 shown

Stainless steel touch-free soap dispenser unit as part of multifeed tank system. Ideal for high-traffic environments including airports, bus terminals, and other public spaces. Multi-feed model, up to six (6) units may be fed from a single multifeed tank. SD01-MFT sold separately, see below. Multifeed soap dispenser is sold with wall mount motor unit. Requires either AC power or DC battery power to operate the soap dispenser. Soap dispenser will dispense once every 48 hours if there is no action in between to avoid a clog in the tip.

Soap pump mechanism included with every multifeed soap dispenser unit. SD01-MFT tank sold separately.

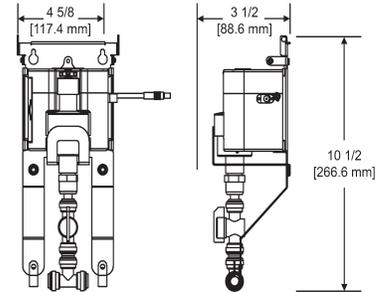


MODEL	DESCRIPTION	Overall Dimensions			FINISH	MOUNTING TYPE	PRICE
		FRONT-BACK	LEFT-RIGHT	HEIGHT			
SD01-001CFL-MF	Wall mount multifeed dispenser with light ring, polished	4 15/16" (125 mm)	1" (25 mm)	1" (25 mm)	High polish	WALL	\$ 820
SD01-001SFL-MF	Wall mount multifeed dispenser with light ring, satin finish	4 15/16" (125 mm)	1" (25 mm)	1" (25 mm)	Satin	WALL	\$ 801
SD01-003CFL-MF	Deck mount, curved multifeed dispenser with light ring, polished	5 9/16" (141 mm)	1" (25 mm)	6 5/8" (168 mm)	High polish	DECK	\$ 839
SD01-003SFL-MF	Deck mount, curved multifeed dispenser with light ring, satin finish	5 9/16" (141 mm)	1" (25 mm)	6 5/8" (168 mm)	Satin	DECK	\$ 860
SD01-002CF-MF	Deck mount multifeed dispenser, polished	5 3/8" (136 mm)	1 1/2" (38 mm)	3 13/16" (97 mm)	High polish	DECK	\$ 707
SD01-002SF-MF	Deck mount multifeed dispenser, satin finish	5 3/8" (136 mm)	1 1/2" (38 mm)	3 13/16" (97 mm)	Satin	DECK	\$ 685

Aqua-foam multifeed soap dispenser tank, 6L SD01-MFT

Wall mounted commercial, multi-fed foam soap dispenser model can supply up to 6 dispensers. 6 litre capacity (1.6 gallons) for foam soap. Only for use with the multifeed models Franke Aqua-foam soap dispensers, in table above with suffix -MF. 6VDC plug in transformer supplied per tank. Fills through opening in countertop. Flange with LED light ring and wall mounting brackets included. LED light ring on fill cap alerts low soap conditions at a glance. During filling, an audible melody will play to alert filling is complete. Overall dimensions 7 3/8" x 7 1/4" x 13 7/8"

\$ 609

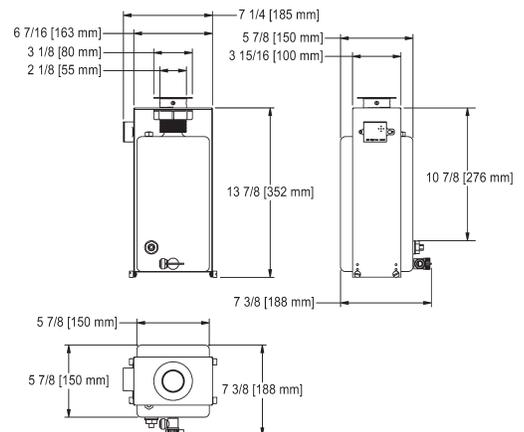



Drinking

Fountains



73	Quasar UVC bottle fillers
76	Bottle fillers
79	Drinking fountain & bottle filler combination
83	Split level drinking fountain & bottle filler combination
86	Drinking fountains
89	Remote chillers
90	Filtration

Quasar UVC retrofit bottle fillers



Quasar retrofit kit, sensor activated KEPWEBQ



Retrofit a bottle filler onto an existing drinking fountain with this retrofit unit. Ideal for healthcare settings, QUASAR sensor activated bottle filler has UVC-LED treatment at the dispense point, which disinfects the water while it is being dispensed. UVC-LED also cycles on periodically to keep the dispense point sanitized between uses.




When retrofitted to either the KEP8AC or KEP8CSL the bottle filler will satisfy ANSI A117.1 and ADA requirements when properly installed. Units also meet guidelines for children's accessibility providing the floor to orifice height is 30" and proper clear floor space is provided for frontal approach.



Standard Features:

- Mercury-free UVC-LED treatment at the dispense point
 - Waterways are lead-free in materials & construction
 - Sensor activated bottle filler with 20 second shut off and digital bottle counter
- Overall dimensions **6 x 16 1/4 x 19 5/16"** (FB x LR x H)

\$ 4,435

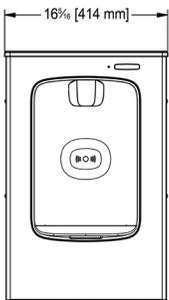

Quasar surface mount, sensor activated KEPWSMEBQ-STN



Surface mount bottle filler with hands-free operation.



Ideal for healthcare settings, QUASAR bottle filler has UVC-LED treatment at the dispense point, which disinfects the water while it is being dispensed. UVC-LED also cycles on periodically to keep the dispense point sanitized between uses. Units also meet guidelines for children's accessibility providing the floor to orifice height is 30" and proper clear floor space is provided for frontal approach.




Standard Features:



- Mercury-free UVC-LED treatment at the dispense point
 - Waterways are lead-free in materials & construction
 - Sensor activated bottle filler with 20 second shut off and digital bottle counter
- Overall dimensions **5 11/16 x 16 5/16 x 24 15/16"** (FB x LR x H)

\$ 4,694

SPOTLIGHT ON UVC-LED WATER TREATMENT



UVC LED light penetrates cell walls and destroys pathogens at point of dispensation, including Legionella, Cryptosporidium, and Giardia



Truly chemical-free water disinfection does not alter the taste of treated water.




UVC light pulses every 10 minutes of inactivity to keep dispense point sanitized.

Quasar UVC bottle fillers & fountains



Model KEP8AC-EBQ-GRY shown

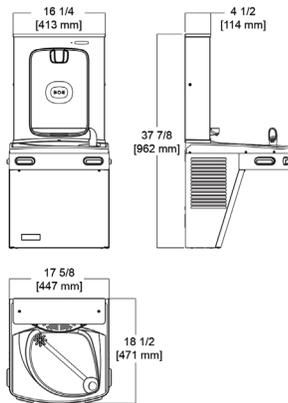

Universal drinking fountain and QUASAR bottle filler combination



Universal drinking fountain with QUASAR bottle filler. Includes the QUASAR sports bottle filler with hands-free activation. QUASAR bottle filler has UVC-LED treatment at the dispense point, which disinfects the water while it is being dispensed. UVC-LED also cycles on periodically to keep the dispense point sanitized between uses.

Basin is designed to eliminate splashing and standing water. Wheelchair accessible, complies with ANSI 117.1 and ADA.

Standard Features:

- Mercury-free UVC-LED treatment at the dispense point
- Waterways are lead-free in materials & construction
- Flexible one-piece water saver bubbler guard

Overall dimensions **18 1/2 x 17 5/8 x 37 7/8"** (FB x LR x H)



CHILLED MODELS ONLY: Deliver 8.0 gph (30 Lph) of 50°F (10°C) water at 90°F (32°C) ambient and 80°F (27°C) inlet water per ASHRAE 18 testing. Fountain has external cold control adjustment and uses high efficiency cooling system and refrigerant R-134a.


MODEL	FOUNTAIN ACTIVATION	CHILLED	BOTTLE FILLER ACTIVATION	UVC DISINFECTION	CABINET FINISH	PRICE
KEP8AC-EBQ-STN	Push pads		Contactless IR sensor		Brushed stainless steel	\$ 7,446
KEP8AC-EBQ-GRY	Push pads		Contactless IR sensor		Greystone finish	\$ 7,107
KEPAC-EBQ-STN	Push pads		Contactless IR sensor		Brushed stainless steel	\$ 5,415
KEPAC-EBQ-GRY	Push pads		Contactless IR sensor		Greystone finish	\$ 5,076

All products comply with all known Plumbing codes, are listed by Underwriters' Laboratories (UL) to U.S. and Canadian standard, are certified to NSF/ANSI Standard 61, NSF/ANSI Standard 372, and are lead free.

Quasar UVC combination bottle fillers & fountains



Model KEP8ACSL-EBQ-GRY shown

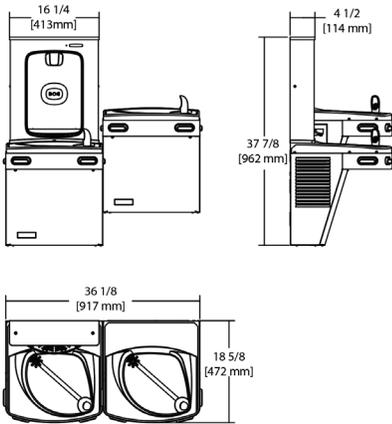

Universal split level drinking fountain and QUASAR bottle filler combination



Universal split level drinking fountains with one QUASAR bottle filler. Includes the QUASAR sports bottle filler with hands-free activation. QUASAR bottle filler has UVC-LED treatment at the dispense point, disinfecting the water while it is being dispensed. UVC-LED also cycles on periodically to keep the dispense point sanitized between uses. Basin is designed to eliminate splashing and standing water. Wheelchair accessible, complies with ANSI 117.1 and ADA.

Standard Features:

- Mercury-free UVC-LED treatment at the dispense point
- Waterways are lead-free in materials & construction
- Flexible one-piece water saver bubbler guard

Overall dimensions **18 5/8 x 36 1/8 x 37 7/8"** (FB x LR x H)



CHILLED MODELS ONLY: Deliver 8.0 gph (30 Lph) of 50°F (10°C) water at 90°F (32°C) ambient and 80°F (27°C) inlet water per ASHRAE 18 testing. Fountain has external cold control adjustment and uses high efficiency cooling system and refrigerant R-134a.

MODEL	FOUNTAIN ACTIVATION	CHILLED	BOTTLE FILLER ACTIVATION	UVC DISINFECTION	CABINET FINISH	PRICE
KEP8ACSL-EBQ-STN	Push pads		Contactless IR sensor		Brushed stainless steel	\$ 8,988
KEP8ACSL-EBQ-GRY	Push pads		Contactless IR sensor		Greystone finish	\$ 8,651
KEPACSL-EBQ-STN	Push pads		Contactless IR sensor		Brushed stainless steel	\$ 6,958
KEPACSL-EBQ-GRY	Push pads		Contactless IR sensor		Greystone finish	\$ 6,621

Bottle filler retrofit kits



Retrofit bottle filler, sensor activated KEPCWEBF



Designed to retrofit on existing KEPAC family of coolers as well as existing competitors products. Cabinet finish is brushed stainless steel. Waterways are lead-free in materials and construction.



If installed onto a filtered water cooler, the status indicator can signal when filter changes are recommended. With non-filtered coolers, this system status will remain green. This retrofit is not meant to install on an electric eye cooler. Units with optional glass fillers must have the glass filler disconnected and removed. Surface mount frame assembly. Installation instructions included.





1.0 gpm (3.7 Lpm) flow rate.

Sensor activated bottle filler with 20 second shut off and digital bottle counter.

Overall dimensions **6 x 16 1/4 x 19 5/16"** (FB x LR x H)

\$ 2,027

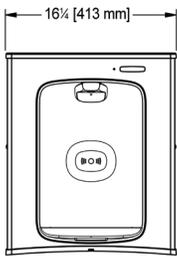

Retrofit bottle filler, sensor activated with bottle filler filtration included KEPCWEBFF

Versafilter III filtration kit factory installed.

\$ 2,230



Retrofit bottle filler, manual activation KEPWSBF



The KEPWSBF sports bottle filler is designed to retrofit on existing KEPAC family of coolers as well as existing competitors products. Cabinet finish is brushed stainless steel. Waterways are lead-free in materials and construction.





Unit is mechanically activated with a push button. Surface mount frame assembly. Installation instructions included. 0.5gpm (1.9 Lpm) flow rate.



Overall dimensions **6 7/16 x 16 1/4 x 19 5/16"** (FB x LR x H)

\$ 1,654



Retrofit bottle filler, manual activation with bottle filler filtration included KEPWSBFF

Versafilter III filtration kit factory installed.

\$ 1,829

All products comply with all known Plumbing codes, are listed by Underwriters' Laboratories (UL) to U.S. and Canadian standard, are certified to NSF/ANSI Standard 61, NSF/ANSI Standard 372, and are lead free.

Bottle fillers, surface mount



Surface mount, sensor activated bottle filler

KEPWSMEBF-STN



Surface mount sports bottle fillers are non-refrigerated units that deliver ambient water. Built-in 100 micron strainer stops particles before they enter the waterway. Waterways are lead-free in materials and construction. Heavy duty steel frame.





Tailpiece is sized to accept either 1 1/2" (38 mm) or 1 1/4" (32 mm) P-trap. P-Trap not included.



Sensor activated bottle filler with 20 second shut off and digital bottle counter.

Overall dimensions **5 11/16 x 16 5/16 x 24 15/16"** (FB x LR x H)

\$ 2,794



Surface mount, manually activated bottle filler

KEPWSMSBF-STN



Surface mount sports bottle fillers are non-refrigerated units that deliver ambient water. Built-in 100 micron strainer stops particles before they enter the waterway. Waterways are lead-free in materials and construction. Heavy duty steel frame.





Tailpiece is sized to accept either 1 1/2" (38 mm) or 1 1/4" (32 mm) P-trap. P-Trap not included.



Manually activated with push button.

Overall dimensions **5 11/16 x 16 5/16 x 24 15/16"** (FB x LR x H)


\$ 2,480

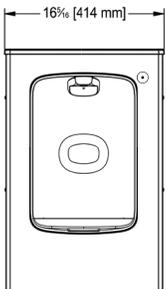

Bottle fillers, stand alone



Model KEMWSM8EBF-STN shown

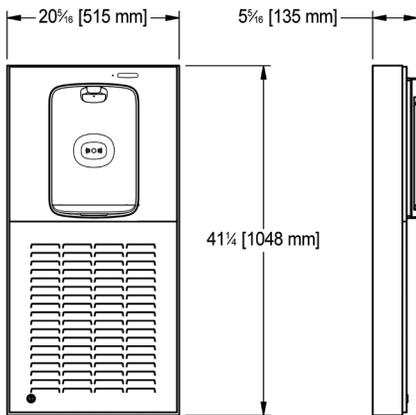

Stand alone bottle fillers



Stand alone wall mounted sports bottle filler with frame. Heavy duty galvanized steel frame with brushed stainless steel panels. Built-in 100 micron strainer stops particles before they enter the waterway. Included tailpiece is sized to accept either 1 1/2" (38 mm) or 1 1/4" (32 mm) P-trap (not included). Waterways are lead-free in materials & construction.

Surface mount model does not need a cut-out for this unit to mount on the wall, only a small cut-out for the water line.



CHILLED MODELS ONLY: Deliver 8.0 gph (30 Lph) of 50°F (10°C) water at 90°F (32°C) ambient and 80°F (27°C) inlet water per ASHRAE 18 testing. Fountain has external cold control adjustment and uses high efficiency cooling system and refrigerant R-134a.



QUASAR bottle filler model has UVC-LED treatment at the dispense point, which disinfects the water while it is being dispensed. UVC-LED also cycles on periodically to keep the dispense point sanitized between uses.

MODEL	MOUNTING TYPE	CHILLED	BOTTLE FILLER ACTIVATION	UVC DISINFECTION	FRONT-TO-BACK DIMENSIONS	PRICE
KEMWSM8EBF-STN	Surface		Contactless IR sensor		5 5/16" (135 mm)	\$ 10,641
KEMW8EBQ-STN	Recessed		Contactless IR sensor		1 5/16" (33 mm)	\$ 7,108
KEMW8EBF-STN	Recessed		Contactless IR sensor		1 5/16" (33 mm)	\$ 9,618
KEMW8SBF-STN	Recessed		Push button		1 5/16" (33 mm)	\$ 7,317

All products comply with all known Plumbing codes, are listed by Underwriters' Laboratories (UL) to U.S. and Canadian standard, are certified to NSF/ANSI Standard 61, NSF/ANSI Standard 372, and are lead free.

Modular combination bottle fillers & fountains



Modular combination, chilled, sensor activated bottle filler

KEM8WR-EBF-STN



Combination chilled drinking fountain with electronic sports bottle filler. Sports bottle filler cabinet finish is brushed stainless steel. Drinking fountain is mechanically activated. Built-in 100 micron strainer stops particles before they enter the waterway. One piece stainless steel top. Wheelchair accessible, complies with ANSI 117.1 and ADA.

Standard Features

- Waterways are lead-free in materials & construction
- Flexible one-piece water saver bubbler guard
- Heavy duty galvanized steel frame
- High efficiency cooling system and refrigerant R-134a
- Sensor activated bottle filler with 20 second shut off and digital bottle counter.

Overall dimensions **19 x 19 3/4 x 45 3/4"** (FB x LR x H)


\$11,301

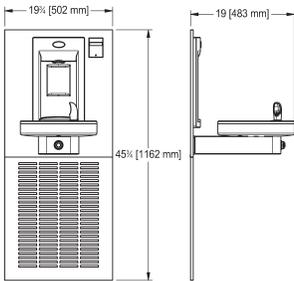

Universal combination drinking fountains with electronic bottle filler



Model KEP8AC-EBF-STN shown

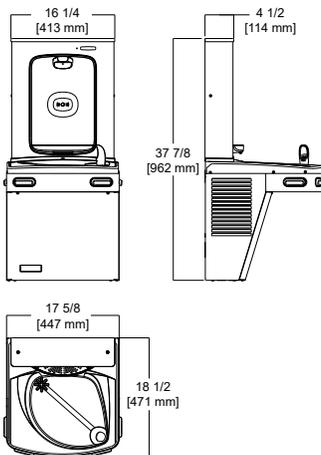

Universal drinking fountain and bottle filler combination



Universal drinking fountain with electronic bottle filler. Basin is designed to eliminate splashing and standing water. Water saver bubbler reduces wasted water by 50% and has a flexible guard and that operates between 20 and 100 PSI (1.4 – 6.9 bar). Wheelchair accessible, complies with ANSI 117.1 and ADA.

Standard features:

- Waterways are lead-free in materials & construction
- Flexible one-piece water saver bubbler guard
- Stainless steel top and heavy-duty galvanized steel frame
- External stream height adjustment

Overall dimensions **18 1/2 x 17 5/8 x 37 7/8"** (FB x LR x H)



CHILLED MODELS ONLY: Deliver 8.0 gph (30 Lph) of 50°F (10°C) water at 90°F (32°C) ambient and 80°F (27°C) inlet water per ASHRAE 18 testing. Fountain has external cold control adjustment and uses high efficiency cooling system and refrigerant R-134a.



MODELS WITH FILTRATION INCLUDED ONLY: Factory-installed Versafilter III filtration unit included. Filtration unit is located behind the bottle filler. Tilt-n-tether system makes filter changes quick and easy. See page 90 for filtration information.


MODEL	FOUNTAIN ACTIVATION	CHILLED	BOTTLE FILLER ACTIVATION	FILTRATION INCLUDED	CABINET FINISH	PRICE
KEP8ACT-EBFF-STN	Contactless IR sensor		Contactless IR sensor		Brushed stainless steel	\$ 7,792
KEP8ACT-EBFF-GRY	Contactless IR sensor		Contactless IR sensor		Greystone finish	\$ 7,216
KEP8AC-EBF-STN	Push pads		Contactless IR sensor		Brushed stainless steel	\$ 4,896
KEP8AC-EBF-GRY	Push pads		Contactless IR sensor		Greystone finish	\$ 4,506

All products comply with all known Plumbing codes, are listed by Underwriters' Laboratories (UL) to U.S. and Canadian standard, are certified to NSF/ANSI Standard 61, NSF/ANSI Standard 372, and are lead free.

Universal combination drinking fountains with manual bottle filler



Model KEP8AC-SBF-GRY shown

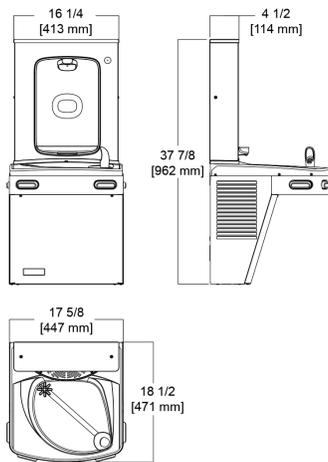

Universal drinking fountain and bottle filler combination



Universal drinking fountain with push button bottle filler. Basin is designed to eliminate splashing and standing water. Water saver bubbler reduces wasted water by 50% and has a flexible guard and that operates between 20 and 100 PSI (1.4 – 6.9 bar). Wheelchair accessible, complies with ANSI 117.1 and ADA.

Standard features:

- Waterways are lead-free in materials & construction
- Flexible one-piece water saver bubbler guard
- Stainless steel top and heavy-duty galvanized steel frame
- External stream height adjustment

Overall dimensions **18 1/2 x 17 5/8 x 37 7/8"** (FB x LR x H)



CHILLED MODELS ONLY: Deliver 8.0 gph (30 Lph) of 50°F (10°C) water at 90°F (32°C) ambient and 80°F (27°C) inlet water per ASHRAE 18 testing. Fountain has external cold control adjustment and uses high efficiency cooling system and refrigerant R-134a.




MODELS WITH FILTRATION INCLUDED ONLY: Factory-installed Versafilter III filtration unit included. Filtration unit is located behind the bottle filler. Tilt-n-tether system makes filter changes quick and easy. See page 90 for filtration information.

MODEL	FOUNTAIN ACTIVATION	CHILLED	BOTTLE FILLER ACTIVATION	FILTRATION INCLUDED	CABINET FINISH	PRICE
KEP8AC-SBF-STN	Push pads		Push button		Brushed stainless steel	\$ 4,620
KEP8AC-SBFF-STN	Push pads		Push button		Brushed stainless steel	\$ 4,759
KEP8AC-SBFF-GRY	Push pads		Push button		Greystone finish	\$ 4,038
KEPAC-SBF-STN	Push pads		Push button		Brushed stainless steel	\$ 3,977
KEPAC-SBF-GRY	Push pads		Push button		Greystone finish	\$ 3,628

Vandal-resistant universal combination bottle fillers & fountains



Model KEPV8AC-EBF-STN shown

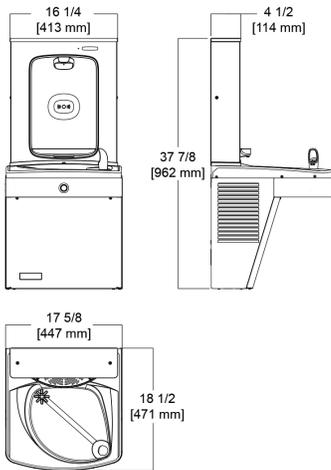

Universal drinking fountain and bottle filler combination, vandal-resistant



Vandal-resistant combination drinking fountain sports bottle filler. Basin is designed to eliminate splashing and standing water. Cabinet finish is brushed stainless steel. Waterways are lead-free in materials and construction. Drinking fountain is push button activated. Built-in 100 micron strainer stops particles before they enter the waterway. Heavy duty galvanized steel frame. Wheelchair accessible, complies with ANSI 117.1 and ADA.

Standard Features

- Waterways are lead-free in materials & construction
- Flexible one-piece water saver bubbler guard
- Stainless steel top and heavy-duty galvanized steel frame
- Vandal-resistant push button activation on drinking fountain

Overall dimensions **18 1/2 x 17 5/8 x 37 7/8"** (FB x LR x H)



CHILLED MODELS ONLY: Deliver 8.0 gph (30 Lph) of 50°F (10°C) water at 90°F (32°C) ambient and 80°F (27°C) inlet water per ASHRAE 18 testing. Fountain uses high efficiency cooling system and refrigerant R-134a.

MODEL	FOUNTAIN ACTIVATION	CHILLED	BOTTLE FILLER ACTIVATION	FILTRATION OPTION	CABINET FINISH	PRICE
KEPV8AC-EBF-STN	Vandal-resistant push button		Contactless IR sensor	Optional: F041253-001	Brushed stainless steel	\$ 6,953
KEPV8AC-SBF-STN	Vandal-resistant push button		Push button	Optional: F041253-001	Brushed stainless steel	\$ 4,656
KEPVAC-SBF-STN	Vandal-resistant push button		Push button	Optional: F041253-001	Brushed stainless steel	\$ 3,755

All products comply with all known Plumbing codes, are listed by Underwriters' Laboratories (UL) to U.S. and Canadian standard, are certified to NSF/ANSI Standard 61, NSF/ANSI Standard 372, and are lead free.

Vandal-resistant split-level combination bottle fillers & fountains



Universal drinking fountain and bottle filler combination, vandal-resistant





Vandal-resistant split-level combination drinking fountain sports bottle filler. Basin is designed to eliminate splashing and standing water. Cabinet finish is brushed stainless steel. Waterways are lead-free in materials and construction. Drinking fountain is push button activated. Built-in 100 micron strainer stops particles before they enter the waterway. Heavy duty galvanized steel frame. Wheelchair accessible, complies with ANSI 117.1 and ADA.

Standard Features

- Waterways are lead-free in materials & construction
- Flexible one-piece water saver bubbler guard
- Stainless steel top and heavy-duty galvanized steel frame
- Vandal-resistant push button activation on drinking fountain

Model KEPV8ACSL-EBF-STN shown

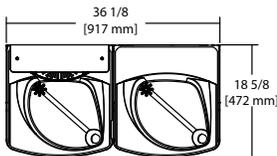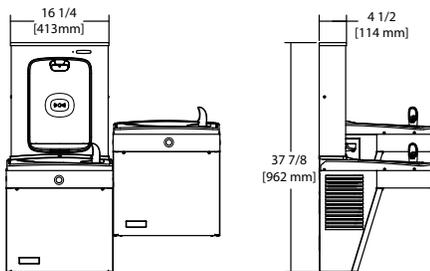

Overall dimensions **18 1/2 x 36 1/8 x 37 7/8"** (FB x LR x H)




CHILLED MODELS ONLY: Deliver 8.0 gph (30 Lph) of 50°F (10°C) water at 90°F (32°C) ambient and 80°F (27°C) inlet water per ASHRAE 18 testing. Fountain uses high efficiency cooling system and refrigerant R-134a.

MODEL	FOUNTAIN ACTIVATION	CHILLED	BOTTLE FILLER ACTIVATION	FILTRATION OPTION	CABINET FINISH	PRICE
KEPV8ACSL-EBF-STN	Vandal-resistant push button		Contactless IR sensor	Optional: F041253-001	Brushed stainless steel	\$ 9,339
KEPV8ACSL-SBF-STN	Vandal-resistant push button		Push button	Optional: F041253-001	Brushed stainless steel	\$ 4,861
KEPVACSL-SBF-STN	Vandal-resistant push button		Push button	Optional: F041253-001	Brushed stainless steel	\$ 4,544

Universal combination, split-level bottle fillers & fountains



Model KEP8ACSL-EBF-GRY shown

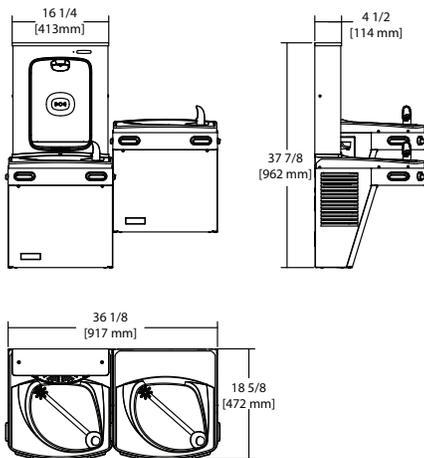

Universal split-level fountain and bottle filler combination



Universal split-level drinking fountain with bottle filler. Bottle filler can be mounted on high or low side. Basin is designed to eliminate splashing and standing water. Water saver bubbler reduces wasted water by 50% and has a flexible guard and that operates between 20 and 100 PSI (1.4 – 6.9 bar).

Wheelchair accessible, complies with ANSI 117.1 and ADA.

Standard features:

- Waterways are lead-free in materials & construction
- Flexible one-piece water saver bubbler guard
- Stainless steel top and heavy-duty galvanized steel frame
- External stream height adjustment

Overall dimensions **18 5/8 x 18 1/2 x 21 3/16"** (FB x LR x H)



CHILLED MODELS ONLY: Deliver 8.0 gph (30 Lph) of 50°F (10°C) water at 90°F (32°C) ambient and 80°F (27°C) inlet water per ASHRAE 18 testing. Fountain has external cold control adjustment and uses high efficiency cooling system and refrigerant R-134a.

MODEL	FOUNTAIN ACTIVATION	CHILLED	BOTTLE FILLER ACTIVATION	FILTRATION OPTION	CABINET FINISH	PRICE
KEP8ACSL-EBF-STN	Push pads		Contactless IR sensor	Optional: F041253-001	Brushed stainless steel	\$ 7,226
KEP8ACSL-SBF-STN	Push pads		Push button	Optional: F041253-001	Brushed stainless steel	\$ 6,237
KEPACSL-EBF-STN	Push pads		Contactless IR sensor	Optional: F041253-001	Brushed stainless steel	\$ 5,389
KEPACSL-EBF-GRY	Push pads		Contactless IR sensor	Optional: F041253-001	Greystone finish	\$ 4,634
KEPACSL-SBF-STN	Push pads		Push button	Optional: F041253-001	Brushed stainless steel	\$ 5,322
KEPACSL-SBF-GRY	Push pads		Push button	Optional: F041253-001	Greystone finish	\$ 4,428

All products comply with all known Plumbing codes, are listed by Underwriters' Laboratories (UL) to U.S. and Canadian standard, are certified to NSF/ANSI Standard 61, NSF/ANSI Standard 372, and are lead free.

Tilt 'n Tether System



2 minutes to change the filter

Filtration unit located behind the bottle filler makes filter changes quick and easy. Get it done in two minutes or less! An automatic shut-off valve inside the head engages when a filter is removed or installed.

Versafilter III

A flexible water treatment that effectively reduces chlorine, odours, cysts, and lead. It also improves the taste and appearance of drinking water.

Tilt 'n Tether system

The factory-installed tethering system allows for secure filtration changes. The tether holds the front of the bottle filler unit in place while you change the filtration canister.

Drinking water you can trust



Deliver safe, refreshing drinking water with Franke fountains and bottle fillers. Add the convenience of chilled drinking water for everyone in your facility.

Reduce the cost and waste associated with disposable water bottles and provide great tasting water on-demand. Bottle fillers reduce plastic bottle waste, save consumers money, and offer convenient drinking water in high-traffic areas.

Want to modernize your facility on a tight budget? **Retrofit.** Franke offers a range of retrofit models of bottle fillers that are quick and easy to install and cost less than full replacement.




Components are lead free.
Products certified to NSF/ANSI Standard 51G & 372. Significantly more water and energy efficient.

Universal drinking fountain



Model KEP8ACT-GRY shown

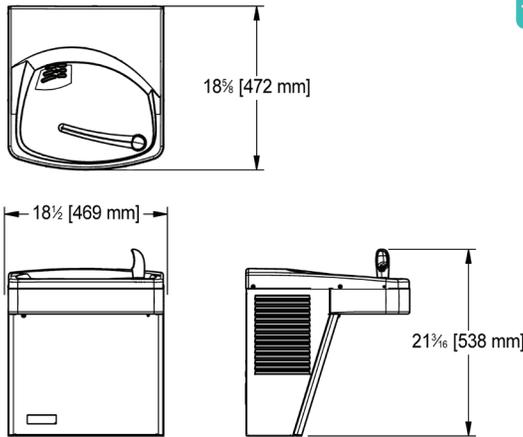

Universal drinking fountain



Universal wall mounted drinking fountain. Basin is designed to eliminate splashing and standing water. Water saver bubbler reduces wasted water by 50% and has a flexible guard and that operates between 20 and 100 PSI (1.4 – 6.9 bar). Complies with ANSI 117.1 and ADA.

Standard features:

- Waterways are lead-free in materials & construction
- Flexible one-piece water saver bubbler guard
- Stainless steel top and heavy-duty galvanized steel frame
- External stream height adjustment

Overall dimensions **18 5/8 x 18 1/2 x 21 3/16"** (FB x LR x H)



CHILLED MODELS ONLY: Deliver 8.0 gph (30 Lph) of 50°F (10°C) water at 90°F (32°C) ambient and 80°F (27°C) inlet water per ASHRAE 18 testing. Fountain has external cold control adjustment and uses high efficiency cooling system and refrigerant R-134a.

MODEL	FOUNTAIN ACTIVATION	CHILLED	FILTRATION OPTION	CABINET FINISH	PRICE
KEP8ACT-STN	Contactless IR sensor		Optional: F041253-001	Brushed stainless steel	\$ 5,019
KEP8ACT-GRY	Contactless IR sensor		Optional: F041253-001	Greystone finish	\$ 3,888
KEP8AC-STN	Push pads		Optional: F041253-001	Brushed stainless steel	\$ 2,279
KEPAC-STN	Push pads		Optional: F041253-001	Brushed stainless steel	\$ 1,956
KEPAC-GRY	Push pads		Optional: F041253-001	Greystone finish	\$ 1,712



Universal retrofit kit to convert push pad to sensor activated, single fountain KE041208-101

Contactless Conversion Kit and converts an existing KEPAC series drinking fountain into a contactless unit with hands-free water activation by eliminating the front and side push-bars.

Features:

- Easily converts manual units to contactless in just minutes.
- Stainless universal conversion kits are compatible with all powder coat finishes.
- Compatible with KEPAC models dating back to 2005.
- All necessary components are included in one kit; no wiring required.


\$1,219

All products comply with all known Plumbing codes, are listed by Underwriters' Laboratories (UL) to U.S. and Canadian standard, are certified to NSF/ANSI Standard 61, NSF/ANSI Standard 372, and are lead free.

Universal drinking fountain



Model KEP8ACSL-GRY shown

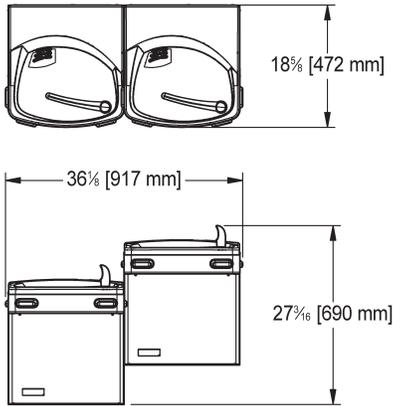

Universal split-level drinking fountain

Universal split-level wall mounted drinking fountain. Basin is designed to eliminate splashing and standing water. Water saver bubbler reduces wasted water by 50% and has a flexible guard and that operates between 20 and 100 PSI (1.4 – 6.9 bar). Complies with ANSI 117.1 and ADA.

Standard features:

- Waterways are lead-free in materials & construction
- Flexible one-piece water saver bubbler guard
- Stainless steel top and heavy-duty galvanized steel frame
- External stream height adjustment

Overall dimensions **18 5/8 x 18 1/2 x 27 3/16"** (FB x LR x H)



CHILLED MODELS ONLY: Deliver 8.0 gph (30 Lph) of 50°F (10°C) water at 90°F (32°C) ambient and 80°F (27°C) inlet water per ASHRAE 18 testing. Fountains have external cold control adjustment and use high efficiency cooling system and refrigerant R-134a.

MODEL	FOUNTAINS ACTIVATION	CHILLED	FILTRATION OPTION	CABINET FINISH	PRICE
KEP8ACSLT-STN	Contactless IR sensor		Optional: F041253-001	Brushed stainless steel	\$ 8,798
KEP8ACSLT-GRY	Contactless IR sensor		Optional: F041253-001	Greystone finish	\$ 8,393
KEP8ACSL-STN	Push pads		Optional: F041253-001	Brushed stainless steel	\$ 4,079
KEP8ACSL-GRY	Push pads		Optional: F041253-001	Greystone finish	\$ 3,787



Universal retrofit kit to convert push pad to sensor activated, split-level fountain

KE041208-301

Double conversion kit for split-level drinking fountains. Contactless Conversion Kit and converts an existing KEPACSL series drinking fountain into contactless units with hands-free water activation by eliminating the front and side push-bars.

\$ 3,214

Universal drinking fountains, vandal-resistant models



Universal, vandal-resistant drinking fountain, chilled KEPV8AC-STN




Universal chilled drinking fountain. Waterways are lead-free in materials and construction. Drinking fountains have built-in 100 micron strainers which stop particles before they enter the waterway. Stainless steel top with a one piece, low flow, tamper proof flexible bubbler. Heavy duty galvanized steel frame. 8 gph chiller, vandal resistant push button, no external stream height adjustment, stainless steel cabinet.



Overall dimensions **18⁵/₈ x 17⁵/₈ x 21³/₁₆"** (FB x LR x H)



\$ 3,298

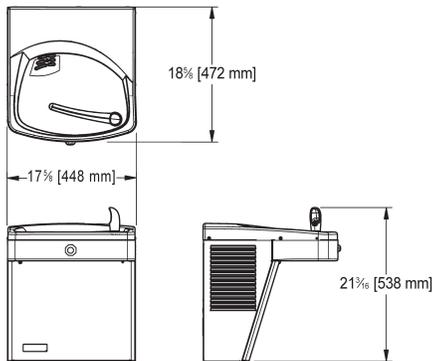

Universal, vandal-resistant split level drinking fountain, chilled KEPV8ACSL-STN




Universal non-chilled drinking fountain. Waterways are lead-free in materials and construction. Drinking fountains have built-in 100 micron strainers which stop particles before they enter the waterway. Stainless steel top with a one piece, low flow, tamper proof flexible bubbler. Heavy duty galvanized steel frame. 8 gph chiller, vandal resistant push button, no external stream height adjustment, stainless steel cabinet.



Overall dimensions **18⁵/₈ x 35¹/₄ x 27³/₁₆"** (FB x LR x H)



\$ 5,138

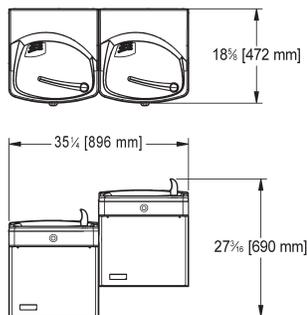

Universal split-level drinking fountain, chilled, stainless steel cabinet KEPV8ACSL-14G



Ultra vandal-resistant 14 gauge stainless steel cabinet.

\$ 10,003

All products comply with all known Plumbing codes, are listed by Underwriters' Laboratories (UL) to U.S. and Canadian standard, are certified to NSF/ANSI Standard 61, NSF/ANSI Standard 372, and are lead free.

Drinking fountains - remote chillers



Under-cabinet remote chiller

KER1P

Powder coated galvanized steel cabinet with plastic front. Chiller is air cooled and designed to fit under a sink. Stainless steel cabinet storage tank and waterways.





1/4" OD water tube connection. Chills 0.8 gallons per hour. HFC refrigerant R-134a. Dial on front of unit allows control of water temperature.

Overall dimensions

8 13/16 x 10 1/2 x 14 11/16" (FB x LR x H)

\$ 1,685



Remote chiller for drinking fountains, 5 gallons per hour capacity

KER5



May be used to supply up to two drinking fountains. Galvanized steel cabinet. Chiller is air cooled and is designed for remote installation. Stainless steel cabinet storage tank. 1/4" OD stainless steel water tube connections. Refrigerant R-134a.



5 gph commercial grade chiller. Overall dimensions

16 5/8 x 8 1/4 x 16 1/4" (FB x LR x H)

\$ 2,253

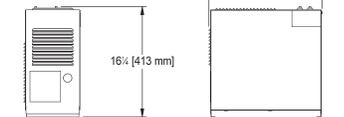

Remote chiller for drinking fountains, 8 gallons per hour capacity

KER8



May be used to supply up to two drinking fountains. Galvanized steel cabinet. Chiller is air cooled and is designed for remote installation. Stainless steel cabinet storage tank. 1/4" OD stainless steel water tube connections. Refrigerant R-134a.



8 gph commercial grade chiller. Overall dimensions

16 3/8 x 10 3/8 x 16 9/16" (FB x LR x H)

\$ 2,824

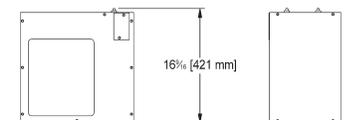

Remote chiller for drinking fountains, 12 gallons per hour capacity

KER12



May be used to supply up to two drinking fountains. Galvanized steel cabinet. Chiller is air cooled and is designed for remote installation. Stainless steel cabinet storage tank. 1/4" OD stainless steel water tube connections. Refrigerant R-134a.



12 gph commercial grade chiller. Overall dimensions

16 3/8 x 10 3/8 x 16 9/16" (FB x LR x H)

\$ 3,205

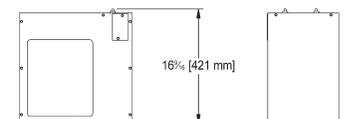

VersaFilter III Filtration



Deliver great tasting water through point of use filtration.

Tilt 'n Tether system makes filter changes quick & easy

- Change filter behind the bottle filler unit
- The tether holds the unit in place and gives access to the filter
- Automatic shut-off valve inside the head engages when filter is inserted or removed

Improve the taste and appearance of drinking water

- Reduces the levels of lead, cysts, chlorine, and particulates
- Drinking water that is virtually free of sediment, rust, and dirt

Upgrade to cleaner water in schools, offices, airports and gyms

- High performance filtration means fewer filter changes per year
- Reduce the risk of lead exposure through drinking water with point of use filtration

Cartridge F041145-001, when used in the VersaFilter III system is tested and certified by IAPMO R&T Lab and IAPMO R&T against NSF/ANSI 42 for the reduction of Chlorine, Taste and Odour and Particulate Class I; NSF/ANSI 53 for the reduction of Cyst and Lead; as verified and substantiated by test data.

Drinking fountain filtration



VersaFilter III bottle filler filtration

The VersaFilter III bottle filler filtration kit is certified to NSF/ANSI 42 and 53 for lead, Particulate Class I, chlorine, taste and odour reduction to 18,000 litres (4,750 gallons). Automatic shut-off valve inside the filter allows you to unscrew the old filter and install the new one in under two minutes.

Franke bottle filler has unique Tilt 'n Tether system to make it quick and easy to change the filter. Kit includes metal mounting bracket, 1 filter cartridge, tubing, and quick connect fittings.

F041253-001
\$ 503

VersaFilter III kit. Complete filter kit for Universal style drinking fountains as well as EBF and SBF bottle filler models.

VersaFilter III kit is available **factory-installed** on these models below:

- KEPWEBFF
- KEPWSBFF
- KEP8ACT-EBFF-GRY
- KEP8ACT-EBFF-STN
- KEP8AC-SBFF-GRY
- KEP8AC-SBFF-STN

F041145-001
\$ 285

Replacement VersaFilter III filter.



Galaxi replacement filter for drinking fountains purchased prior to 2023

The Galaxi® drinking fountain filter provides optimum filtration of chlorine, bad taste, odour, lead, sediment and cysts. The activated carbon with a cellulose-free synthetic fiber matrix performs as a sediment filter and a carbon block. It selectively removes dangerous contaminants from drinking water while maintaining water pH balance. Reduces chlorine and articles in accordance with ANSI/NSF STD 42. Reduces cysts and lead in accordance with ANSI/NSF STD 53. Additional phosphate beads inhibit scale for hard water and hot water applications. No carbon fines are released into the water stream.

F037116-101
\$ 285

Drinking fountain replacement parts



Bubbler replacement parts
030774-006
Dial-a-drink plastic bubbler.
\$ 457



Bubbler replacement parts
032799-005
One piece bubbler with flexible bubbler guard, regulated, for KEP-series.
\$ 334



Bubbler replacement parts
035607-108
One piece flexible bubbler valve, non-regulated, for KEPAC-series.
\$ 166

Drain Parts & Fittings



Pictured: 1140G grid accessory installed on 1140 strainer assembly

3 1/2" (89 mm) waste fittings



Stainless steel basket strainer 1140

3 1/2" (89 mm) all metal basket strainer assembly. Type 304 stainless steel construction complete with 1 1/2 x 3" (38 x 76 mm) stainless steel tailpiece. Pull up crumb cup. Certified to ASME A112.18.2-2005/CSA B125.2-2005.

\$ 50



Stainless steel grid strainer accessory, type 316, vandal-resistant 1140G

Grid accessory for 3 1/2" (89 mm) basket strainer. Replaces crumb cup on 1140, 1140F-316 or the 1120-316 waste assembly to create a vandal-resistant grid waste assembly. Type 316 stainless steel construction. Certified to ASME A112.18.2-2005/CSA B125.2-2005.

\$ 48



Stainless steel basket strainer, type 316 1140F-316

3 1/2" (89 mm) basket strainer in type 316 stainless steel construction, with 1 1/2 x 3" (38 x 76 mm) Type 316 stainless steel tailpiece. Pull up crumb cup. Certified to ASME A112.18.2-2005/CSA B125.2-2005.

\$ 100

1 1/2" (38 mm) waste fittings



Duplex waste with rubber stopper
100

1 1/2" (38 mm) DN38 duplex stainless steel waste complete with 1 1/2 x 3" (38 x 76 mm) brass tailpiece. Rubber stopper with pull up ring.

\$ 29



Duplex waste in type 316 stainless steel with rubber stopper
200-316

1 1/2" (38 mm) DN38 duplex type 316 stainless steel waste complete with 1 1/2 x 3" (38 x 76 mm) type 316 stainless steel tailpiece. Rubber stopper with pull up ring.

\$ 86



Stainless steel grid strainer
100-NR

1 1/2" (38 mm) vandal-resistant grid waste fitting, type 302 stainless steel, complete with with 1 1/2 x 3" (38 x 76 mm) stainless steel tailpiece.

\$ 212



Integral waste assembly, type 316
1047

1 1/2" (38 mm) integral waste assembly. Complete with type 316 stainless steel shank, shank gasket, brass shank nut, brass tailpiece nut, and nylon tailpiece gasket.

\$ 43



Integral waste cover for 1 1/2" (38mm) drain
100-1-302

1 1/2" (38 mm) perforated stainless steel grid waste cover for 1 1/2" drain.

\$ 38



Stainless steel standpipe, 10" long
310-1

Standpipe for 1 1/2" (38 mm) waste in type 304 stainless steel. 10" (254 mm) long.

\$ 78

1 1/4" (32 mm) waste fittings



Grid strainer with overflow
3700

1 1/4" (32 mm) grid strainer with overflow and removable tailpiece. Certified to ASME A112.18.2-2005/CSA B125.2-2005.

\$ 81



Grid strainer no overflow
3719

1 1/4" (32 mm) grid strainer with removable tailpiece. Certified to ASME A112.18.2-2005/CSA B125.2-2005.

\$ 81

Drain Parts & Fittings



Type 316 stainless steel tailpiece
315-9-316

1 1/2 x 3" (38 x 76 mm) type 316 stainless steel tailpiece.

\$ 40



Specialty waste fitting, drain cover
WHB5222-PW

Replacement stainless steel pyramid-shaped waste cover for WHB5222-7 basin.

\$ 123



Overflow kit for laundry sinks
OF100

Components for laundry sink overflow assembly, 3 1/2" (89 mm) waste size.

\$ 70

Overflow replacement parts



Chrome finish overflow elbow

21020

2 ⁵/₈ x 1 ¹/₄" (67 x 32 mm) elbow with flat washer. For use with vanity basin models with overflow: WT400C-8, WT500C-8, WT600C-8, OV1420U-5, OV1619-5, OV1317U-5, OV1418-6, OV17-5, OV17-6.

\$ 6



Chrome finish overflow collar

21021

3 ³/₁₆ x 2 ¹/₄" (81 x 54 mm) overflow collar. For use with vanity basin models with overflow: WT400C-8, WT500C-8, WT600C-8, OV1420U-5, OV1619-5, OV1317U-5, OV1418-6, OV17-5, OV17-6.

\$ 5



Overflow tubes, stainless steel, various lengths

21100

10" (254 mm) for OV17-6 vanity basin.

\$ 30

21105

10 ¹/₂" (267 mm) for OWB1420U-5 undermount sink, OV1821-6 vanity basin.

\$ 31

21110

11" (279 mm) for OV1418-6 and OV1419-6 vanity basins.

\$ 31

21600

6" (152 mm) for OV1420U-5, OV1317U-5 vanity basins.

\$ 20

21650

6 ¹/₂" (165 mm) for OV1420U-5 vanity basin.

\$ 24

21750

7 ¹/₂" (190 mm) for OV17-5 vanity basin, WT400C-8, WT500C-8, AND WT600C-8 wall hung basins.

\$ 26

21850

8 ¹/₂" (216 mm) for OWB1119U-5 undermount sink.

\$ 26

High Security



Franke is the exclusive Canadian distributor for I-CON systems

Custom solutions for retrofit and new construction

Correctional facilities across Canada trust I-CON systems to deliver reliable, tailor-made solutions. Call Franke Commercial for a quote: 855-446-5663.

As much as 90% savings in parts replacement and labour

Simple yet robust valves, sensors, solenoids mean fewer parts to keep on hand. Find out how much you can save with a free, no-obligation quote.

Up to 70% water savings with an I-CON system installation

Saving water is good for the environment and good for your bottom line. Want to know how much you can save? Email us today, commercial-info.ca@franke.com.

Get started with I-CON for your facility retrofit

Start with one cell, or one block. We work with your facility's existing systems to provide the equipment you need to start saving on water, maintenance, and parts.

Stainless steel fixtures for prisons, jails, and detention facilities



Lavatory-toilet combination fixture

Combination lavatory sink with various sizes of toilets. Anti-ligature model available. Toilet features blowout flushing action. Wheelchair accessible model has integrated grab bars and withstands up to 5,000 lbs loading.



Lavatories

Stainless steel oval or rectangular shaped basins with backsplash. Customize the controls to the needs of your facility.



Stainless steel toilets

Floor mount or wall mount models with either siphon jet or blowout operation. Self-draining flushing rim. Fully enclosed trap. Optional top or back supply.



Shower panels & cabinets

Stainless steel shower panels with vandal-resistant shower head. Cabinet showers available in different sizes. Slip-resistant floor.



Urinals

Wall hung urinals with washdown action. Straddle model available. Optional back or top supply.



TruTOUCH® touch sensors

Stainless steel vandal-resistant construction with no moving parts. Available with or without LED status indicator.

Intelligent water conservation by I-CON



ENVISAGE® water management software

Manage your facility with complete control over all inmate water usage. Log and monitor plumbing usage in real time. Restrict plumbing usage from individual cell fixtures to the entire facility with the tap of a finger. For safer, more efficient inspections, lockdowns, and extractions. Envisage® features an intuitive graphic interface with a map of your facility and touchscreen interface for each cell.

NEXUS® Controllers

The NEXUS® Pro system of controllers can operate as standalone units or as part of the ENVISAGE® water management network in your facility. Stay in complete control of your plumbing system. Options include wired or wireless communication, AC or battery power.



Electronic valve system

I-CON's electronic valve system ensures accuracy, performance, and longevity in high grade materials designed to outlast the competition. Flush valves, lavatory valves, and shower valves that operate without diaphragms. Maximum water savings and minimal maintenance costs.

Each application has its own unique needs for fixtures, valves, sensors, solenoids, and systems. Call for a quote: 855-446-5663 or email us at commercial-info.ca@franke.com.

Custom solutions



Full custom fabrication capabilities: No minimum order

Franke Commercial will custom fabricate products to meet our customers' exact specifications. Modifications can be made to most of our standard catalogue products.

All our custom fabricated products are polished to a #4 satin finish and can be made to meet the material specification you require (T304 or T316, 14 to 18 gauge). Continuous weld construction is available for pharmaceutical applications, if required.

Contact us for a quote:

- Countertops
- Topmount & Undermount Sinks
- Drainboard Sinks
- Scullery Sinks
- Wall Mount Hand Wash Stations
- Surgical Scrub Stations
- Mop Sinks
- Wall Mounted Utility Sinks



Some customers require a sink, basin, or countertop that is different from our catalog offering. This is why Franke Commercial is proud to offer custom stainless steel solutions for our customers. If you can sketch it, we can build it using our decades of experience and the quality you expect from Franke.



It starts with a sheet of stainless steel

We will cut, form, weld and finish it to your exact specifications. Give us the material specifications, written spec or drawing, and Franke will deliver a certified high-quality product.

Sinks with integrated countertops

Tops are available in any size and length.
Sink bowl welded into countertop.



Custom-sized sinks

We have worked with architects, designers, and engineers for decades to bring their unique designs to life.

Scullery & utility

Tailor made bowl size, height, backsplash style, drainboards, and sink edge types.

Healthcare & pharmaceutical


Continuous weld construction available upon specification. Custom made products that meet or exceed national healthcare standards.

Get a quote within 48hrs


Delivered from our Canadian facility in 8 to 10 weeks' time. Need it faster? Email us at: commercial-info.ca@franke.com

Standard hole drillings for topmount stainless steel sinks


Single bowl



-1
1 hole




-2
2 hole, 4" centerset




-3
3 hole, 8" centerset


Double bowl

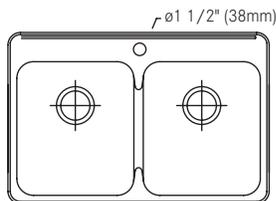

-1
1 hole

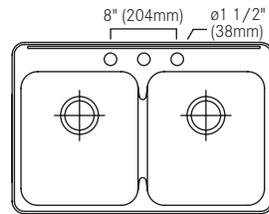


-3
3 hole, 8" centerset

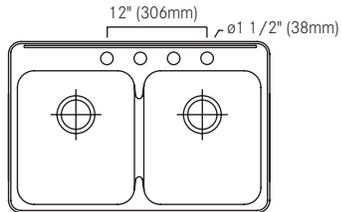


-4
3 hole, 8" centerset, plus 1 hole 4" to the right

Triple bowl

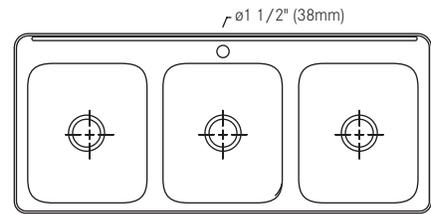

-1
1 hole

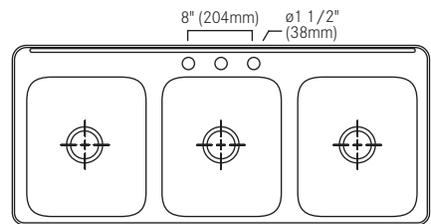

-3
3 hole, 8" centerset

Care & Maintenance for Stainless Steel Sinks

WHAT TO DO

Brushes with natural or plastic bristles, cotton or synthetic or micro fibre clothes, leather, sponges, pressure washer, vapour stream cleaner, toothpaste, household and window-cleaning products and natural cleaning substances like diluted vinegar (20 % vinegar / 80 % water) are ideal for cleaning stainless steel.

The best form of maintenance is frequent, regular cleanings. The best method of preventative maintenance is to ensure that the fixture is clean, dry and exposed to room atmosphere when not in use. Rinse and towel dry the fixtures daily in order to minimize major cleanups. This is of particular importance if potentially corrosive chemicals have been used.

Keep the fixture free of any standing water, which may build up mineral deposits. The quality of your water can affect the appearance and this water quality will vary from building to building.

To clean your stainless product, use the mildest cleaning procedure that will do the job effectively. On mirror finish (shiny) products we recommend using either a liquid detergent or Peek™ with a soft cloth. **DO NOT USE ABRASIVE MATERIALS ON THE MIRROR FINISH.** On satin (matte) finishes and/or inside sink bowls we recommend using a very mild abrasive cleanser such as Old Dutch® or Cameo®.


Any cleaning or scrubbing to remove stubborn stains should follow the direction of the grain line. Any scrubbing across the grain will show as a scratch. Scrubbing in the same direction as the polish lines will blend in any surface scratch. We recommend that Scotch-Brite® pads be used only on satin finishes.

Stains and water spots anywhere on the product can be removed with a small amount of Peek™ on a damp cloth. Rub Peek™ over the surface. Always rinse after using a cleaning agent, and wipe dry to discourage any water spotting.

WHAT NOT TO DO

We recommend that you do not use chlorine bleach to clean stainless steel, as chlorine will attack the protective layer that makes stainless steel truly stainless. The risk of damage is proportional to the concentration of the chlorine and the duration of exposure between the fixture and chlorine agent. Always dilute any antibacterial product used and wipe up any spills. Note: some antibacterial soaps contain a chlorine compound.

The unique properties of stainless steel are dependent upon exposure of the surface to the atmosphere. Do not leave any utensils in a sink overnight, as they will trap water underneath or leave a residue of small iron particles which could lead to staining and discoloration of the surface. They may not even be readily visible, but they most certainly will lead to corrosion. Any signs of rust can be removed with non metallic Scotch-Brite® scouring pads, but do not scrub across the grain. For similar reasons do not leave any mild steel, or cast iron cookware or implements, anywhere on a stainless steel surface for extended periods of time. Steel wool, metallic scouring pads, abrasive, grinding and polishing powder as well as sand paper should never be used on a stainless steel surface as they can damage or scratch it.

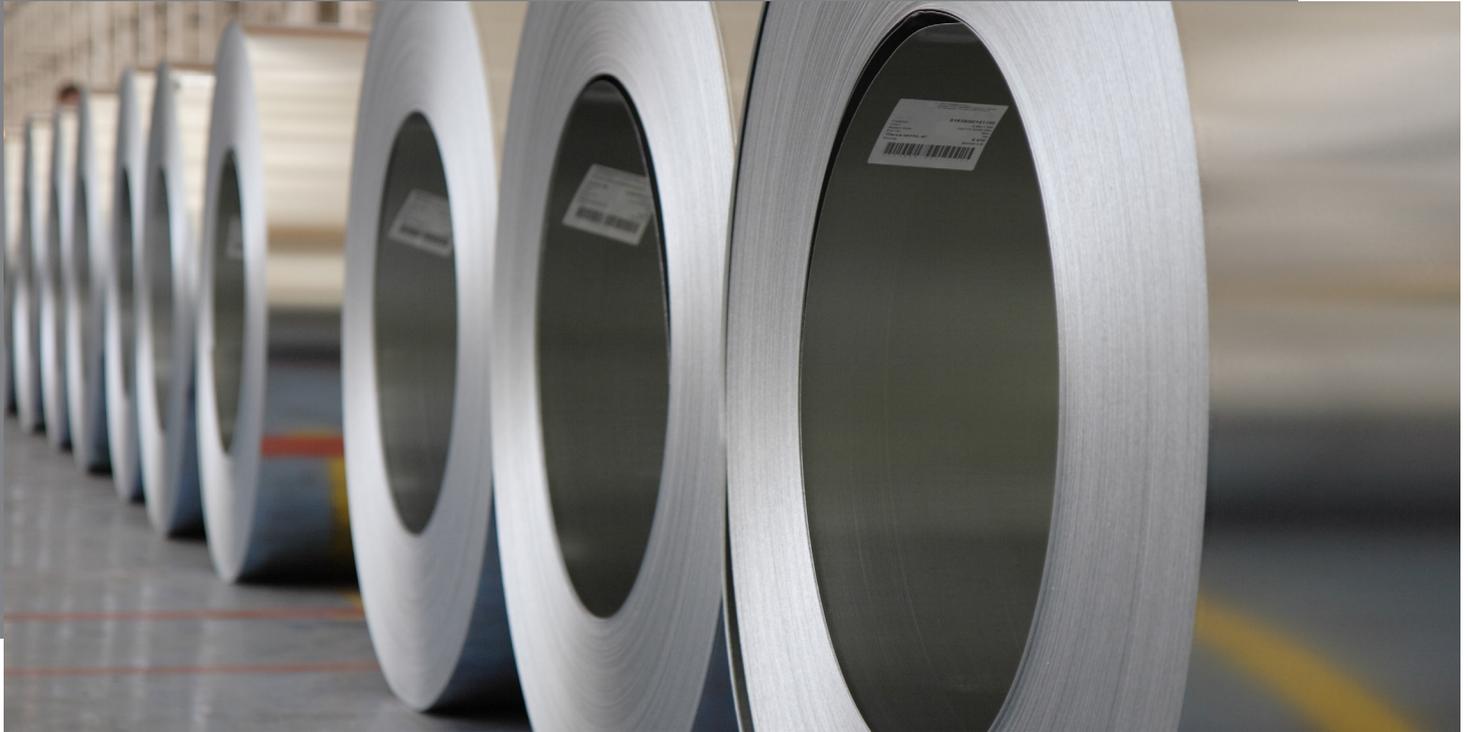

STAINLESS STEEL CORROSION RESISTANCE

20 GAUGE

18-8 stainless steel, Type 301

A good quality steel with 18% chromium and 8% nickel content. This type of stainless steel is typically used for sinks that are 8" deep or less.

18 GAUGE

18-10 stainless steel, Type 304

A heavier weight stainless with 18% chromium, and 10% nickel. This type of stainless steel is optimal for manufacturing deeper sink bowls.

16 & 14 GAUGE

Type 304

Most often used in fabrication of institutional sinks such as kitchen sculleries, wallmount utility sinks, as well as mop and service sinks.

BOWL AND DECK FINISHES

With the exception of vanity basins, the Franke Commercial sink bowls have a #4 satin finish. A satin finish has a noticeable grain line on the inside of the bowl. This type of finish is practical, particularly in a heavy use application, as any scratches may be blended into the grain line.

The #4 satin finish deck will stand up to the rigours of time and repeated use, and the natural grain of the steel will disguise any scratches acquired from use.



Stainless steel corrosion resistance information

Substance, Conditions, Strength and Temperature	T316	T304	T301
Acetic Anhydride (90%, aerated, 180 degrees F)	B	C	C
Aluminum Fluoride (5%, 70 degrees F)	B	C	C
Aluminum Sulfate (10%, boiling)	A	B	B
Ammonium Bromide (5%, 70 degrees F)	B	C	C
Ammonium Sulfate (10%, boiling)	A	B	B
Bleaching Powder (dry)	A	C	C
Butyric Acid (saturated, boiling)	A	B	B
Calcium Bisulfite (aqueous solution, 300 lbs. pressure, 390 degrees F)	B	C	C
Calcium Hydroxide (50%, boiling)	B	C	C
Calcium Hypochlorite (saturated, 70 degrees F)	A	C	C
Chloroacetic Acid (70 degrees F)	B	C	C
Chlorine Gas (moist, 70 degrees F)	B	C	C
Chromic Acid (50%, boiling)	B	C	C
Ferric Chloride 1%, 70 degrees F)	B	C	C
Fluosilicic Acid 90%, 70 degrees F)	B	C	C
Formic Acid (10%, 180 degrees F)	A	C	C
Hydrochloric Acid (1% or less, 70 degrees F)	B	C	C
Iodine (dry, 70 degrees F)	A	C	C
Lactic Acid (10%, 150 degrees F)	B	C	C
Mercuric Chloride (2%, 70 degrees F)	B	C	C
Oxalic Acid (2.5%, 180 degrees F)	A	C	C
Phosphoric Acid (80%, 230 degrees F)	B	C	C
Salt Brine (70 degrees F)	A	C	C
Sauerkraut Brine (70 degrees F)	A	C	C
Sodium Hydroxide (melting, 600 degrees F)	B	C	C
Stannic Chloride (5%, 70 degrees F)	B	C	C
Sulfuric Acid (5%, 100 degrees F)	A	C	C
Zinc Chloride (saturated, 70 degrees F)	B	C	C

CHEMICAL DATA

A = fully resistant, **B** = fairly resistant, **C** = not resistant. The chemical data above should be used as a guide to determine the type of stainless steel that will be appropriate for the application. The rating system denotes the level of resistance to corrosion for the different types of stainless steel. For applications involving chemicals or conditions not listed, please consult Franke Commercial customer service.

Corrosion, or rusting, often reported soon after installation, has two main causes:

1. Contact Corrosion occurs when a piece of common carbon steel, copper, brass or other foreign material contacts the sink and destroys the passive protective film.
2. Pitting or Pinhole Corrosion occurs when chlorides attack the steel forming pits where galvanic cells are created. Acid chlorides are particularly severe, but even chlorine bleach can cause failure. The sink should be rinsed thoroughly after such contact. Type 316 steel should be specified if the sink will be subject to such conditions.

In the presence of oxygen, stainless steel forms a protective chromium oxide layer. This is due to the addition of chromium in excess of 11.5% during the alloying stage. The further addition of nickel, in excess of 7%, gives superior corrosion resistance to the 300 series.

Maximum corrosion resistance is obtained with the addition of molybdenum to form TYPE 316, designed to resist attack under highly corrosive conditions.



As implied, stainless steel requires oxygen in order to be stainless. There are ways to make oxygen more plentiful. For example, an acid solution which might otherwise corrode the steel, can be aerated to maintain the protective film.

Index Price Group A

100.....	93.....	\$29	AT02-005AC.....	67.....	\$1,637	LBS2708P-1.....	6.....	\$898
1047.....	93.....	\$43	AT02-005DC.....	67.....	\$1,707	LBS4008P-1.....	6.....	\$969
1140.....	92.....	\$50	AWHB1414P-3.....	55.....	\$8,161	LBS4010P-1.....	6.....	\$1,283
3700.....	94.....	\$81	AWHB2220W-3-1.....	59.....	\$1,553	LBS4408P-1.....	6.....	\$863
3719.....	94.....	\$81	AWHBS2419-7.....	58.....	\$1,951	LBS4607-1.....	5.....	\$619
21020.....	95.....	\$6	CL-DB.....	25.....	\$1,488	LBS4607-316P-1.....	14.....	\$1,090
21021.....	95.....	\$5	CM-16104.....	69.....	\$504	LBS4608P-1.....	6.....	\$674
21100.....	95.....	\$30	CM-16104-WM.....	69.....	\$504	LBS4610-316P-1.....	14.....	\$1,324
21105.....	95.....	\$31	DL2448-1.....	24.....	\$5,799	LBS4610P-1.....	6.....	\$929
21110.....	95.....	\$31	DL2448-5.....	24.....	\$6,154	LBS6108P-1.....	6.....	\$1,054
21600.....	95.....	\$20	FSS151509-316-1.....	18.....	\$5,256	LBS6110P-1.....	6.....	\$1,331
21650.....	95.....	\$24	FSS151509-316-1.....	35.....	\$5,256	LBS6407-316P-1.....	14.....	\$1,193
21750.....	95.....	\$26	FSS2210-316-1.....	19.....	\$11,267	LBS6408P-1.....	6.....	\$713
21850.....	95.....	\$26	FSS2210-316-1.....	35.....	\$11,267	LBS6410PCB-1.....	6.....	\$912
27811170.....	68.....	\$268	FSS222210-316-1.....	18.....	\$7,684	LBS6807-1.....	5.....	\$378
100-1-302.....	93.....	\$38	FSS222210-316-1.....	35.....	\$7,684	LBS6807-2.....	5.....	\$428
100-NR.....	93.....	\$212	FSSL223410-316-1.....	18.....	\$9,817	LBS6807-316P-1.....	14.....	\$1,179
1140F-316.....	92.....	\$100	FSSL223410-316-1.....	35.....	\$9,817	LBS6808-1.....	5.....	\$482
1140G.....	92.....	\$48	FSSO2210-316-1.....	19.....	\$11,267	LBS6808-2.....	5.....	\$525
200-316.....	93.....	\$86	FSSO2210-316-1.....	35.....	\$11,267	LBS6808-316P-1.....	14.....	\$1,283
310-1.....	93.....	\$78	FSSOL223410-316-1.....	19.....	\$11,556	LBS6808P-1.....	6.....	\$579
315-9-316.....	94.....	\$40	FSSOL223410-316-1.....	35.....	\$11,556	LBS6810-1.....	5.....	\$832
AHWSS1720W-00.....	48.....	\$2,345	FSSOR223410-316-1.....	19.....	\$11,556	LBS6810-316P-1.....	14.....	\$1,411
AHWSS1720W-G.....	49.....	\$2,574	FSSOR223410-316-1.....	35.....	\$11,556	LBS6810P-1.....	6.....	\$952
AHWSS2321WDM-0050.....	\$2,863	FSSR223410-316-1.....	18.....	\$9,817	LBS7308-1.....	5.....	\$771
AHWSS2321WDM-G50.....	\$3,375	FSSR223410-316-1.....	35.....	\$9,817	LBS7308P-1.....	6.....	\$1,093
ALBD4405P-1.....	7.....	\$1,337	HHF180-6L.....	68.....	\$1,043	LBS7310P-1.....	6.....	\$1,404
ALBD4406P-1.....	7.....	\$1,356	HHF180-6L-W.....	68.....	\$1,147	LBS7312P-1.....	6.....	\$1,615
ALBD6405-1.....	7.....	\$815	HHF23T.....	68.....	\$1,011	LBS7314P-1.....	6.....	\$3,130
ALBD6405P-1.....	7.....	\$1,087	HWF05.....	46.....	\$4,361	LBS7508-1.....	5.....	\$590
ALBD6406P-1.....	7.....	\$1,104	HWF23.....	46.....	\$4,408	LBS7508P-1.....	6.....	\$894
ALBD7506P-1.....	7.....	\$1,544	HWF43.....	46.....	\$4,648	LBS7808P-1.....	6.....	\$1,307
ALBDC182605P-1.....	7.....	\$1,446	HWS0610P-3.....	56.....	\$994	LBS9106-1.....	5.....	\$363
ALBS1306P-1.....	6.....	\$569	HWS1414P-00.....	54.....	\$3,034	LBSDBL6408P-1.....	9.....	\$3,593
ALBS2706P-1.....	6.....	\$884	HWS1420P-00.....	55.....	\$4,795	LBSDBL6810-316P-1.....	15.....	\$4,606
ALBS4006P-1.....	6.....	\$951	HWS6810P-3.....	56.....	\$1,334	LBSDBL6810P-1.....	9.....	\$3,699
ALBS4406P-1.....	6.....	\$842	HWS-RS-00.....	54.....	\$525	LBSDBR6408P-1.....	9.....	\$3,593
ALBS4605P-1.....	6.....	\$853	HWSS1518P-00.....	54.....	\$2,860	LBSDBR6810-316P-1.....	15.....	\$4,606
ALBS4606P-1.....	6.....	\$911	HWSS2321W-00.....	45.....	\$5,526	LBSDBR6810P-1.....	9.....	\$3,699
ALBS6106P-1.....	6.....	\$1,072	IWC2104.....	47.....	\$518	LBT6407CB-1.....	8.....	\$1,624
ALBS6406P-1.....	6.....	\$943	IWC2203.....	55.....	\$491	LBT6410PCB-1.....	8.....	\$2,927
ALBS6805-1.....	5.....	\$575	LBD4408P-1.....	7.....	\$1,377	LBT8610P-1.....	8.....	\$3,472
ALBS6805P-1.....	6.....	\$924	LBD6407-1.....	7.....	\$651	MEDI-MIX.....	47.....	\$401
ALBS6806P-1.....	6.....	\$943	LBD6408-1.....	7.....	\$784	MEDI-SHR.....	47.....	\$1,017
ALBS7306P-1.....	6.....	\$1,072	LBD6408-316P-1.....	14.....	\$2,036	MIX-LF.....	67.....	\$362
ALBS7506P-1.....	6.....	\$875	LBD6408P-1.....	7.....	\$1,121	OC6-316.....	17.....	\$423
ALBS7806P-1.....	6.....	\$1,291	LBD6410-316PCB-1.....	14.....	\$2,312	OF100.....	94.....	\$70
ART36-1.....	11.....	\$2,367	LBD6410PCB-1.....	7.....	\$1,611	OV1317U-5.....	43.....	\$665
ART36-316-1.....	16.....	\$3,894	LBD7508-1.....	7.....	\$1,072	OV1418-6.....	39.....	\$466
ART36-316-3C.....	16.....	\$3,894	LBD7508P-1.....	7.....	\$1,568	OV1420U-5.....	43.....	\$731
ART48-1.....	11.....	\$2,638	LBD7510P-1.....	7.....	\$2,079	OV1619-5-1.....	40.....	\$547
ART48-316-1.....	16.....	\$4,279	LBDDBL6408P-1.....	9.....	\$4,600	OV1619-5-3.....	40.....	\$547
ART48-316-3C.....	16.....	\$4,279	LBDDBR6408P-1.....	9.....	\$4,600	OV1619-6-1.....	40.....	\$502
ART60-1.....	11.....	\$3,137	LBS1306-1.....	5.....	\$424	OV1619-6-3.....	40.....	\$502
ART60-316-1.....	16.....	\$4,657	LBS1308P-1.....	6.....	\$797	OV17-6.....	39.....	\$472
ART60-316-3C.....	16.....	\$4,657	LBS2708-1.....	5.....	\$515	OV1821-5-1.....	41.....	\$577

Index Price Group A

OV1821-5-3.....41.....	\$577	SL2424-1.....24.....	\$3,468	V1619-6-3.....40.....	\$477
OV1821-6-1.....41.....	\$519	SL2424-316-1.....16.....	\$7,009	V17-5.....39.....	\$436
OV1821-6-3.....41.....	\$519	SL2424-316-5.....16.....	\$7,387	V17-6.....39.....	\$454
OWB1420U-5.....42.....	\$784	SL2424-5.....24.....	\$3,607	V1821-5-1.....41.....	\$498
RDL2436-1.....30.....	\$8,668	SL2448-1.....24.....	\$4,748	V1821-5-3.....41.....	\$498
RDL2436L-1.....30.....	\$10,008	SL2448-316-1.....16.....	\$10,607	V1821-6-1.....41.....	\$496
RDL2436LR-1.....30.....	\$11,347	SL2448-316-5.....16.....	\$11,555	V1821-6-3.....41.....	\$496
RDL2436R-1.....30.....	\$10,008	SL2448-5.....24.....	\$4,921	WB1119U-5.....42.....	\$526
RDL2448-1.....30.....	\$9,338	SSL2418-1.....26.....	\$5,147	WB1420U-5.....42.....	\$736
RDL2448L-1.....30.....	\$10,677	SSL2418L-1.....26.....	\$6,446	WDL2436-1.....33.....	\$9,805
RDL2448LR-1.....30.....	\$12,015	SSL2418LR-1.....26.....	\$7,742	WDL2436L-1.....33.....	\$11,212
RDL2448R-1.....30.....	\$10,677	SSL2418R-1.....26.....	\$6,446	WDL2436LR-1.....33.....	\$12,620
RSL2418-1.....29.....	\$5,690	SSL2424-1.....26.....	\$5,799	WDL2436R-1.....33.....	\$11,212
RSL2418L-1.....29.....	\$7,030	SSL2424L-1.....26.....	\$7,093	WDL2448-1.....33.....	\$10,509
RSL2418LR-1.....29.....	\$8,367	SSL2424LR-1.....26.....	\$8,391	WDL2448L-1.....33.....	\$11,916
RSL2418R-1.....29.....	\$7,030	SSL2424R-1.....26.....	\$7,093	WDL2448LR-1.....33.....	\$13,323
RSL2424-1.....29.....	\$5,990	SSS1827.....22.....	\$17,925	WDL2448R-1.....33.....	\$11,916
RSL2424L-1.....29.....	\$7,330	SSS1827DDS.....23.....	\$23,807	WHB1616-3.....62.....	\$1,023
RSL2424LR-1.....29.....	\$8,668	SSS1827SDSL.....22.....	\$19,263	WHB1617-3.....63.....	\$1,322
RSL2424R-1.....29.....	\$7,330	SSS1827SDSR.....23.....	\$19,263	WHB1617-316-3.....17.....	\$1,972
RTL2454-1.....31.....	\$13,356	SSU1-00.....52.....	\$9,749	WHB1617-7.....63.....	\$1,294
RTL2454L-1.....31.....	\$14,693	SSU1-10.....53.....	\$10,666	WHB1716-3.....65.....	\$1,237
RTL2454LR-1.....31.....	\$16,033	SSU1-2016-3.....51.....	\$12,113	WHB1716SPL-3.....64.....	\$1,503
RTL2454R-1.....31.....	\$14,693	SSU1-2020-3.....51.....	\$12,459	WHB1819-3.....64.....	\$1,396
RTL2472-1.....31.....	\$14,026	SSU2-00.....52.....	\$14,090	WHB1819-316-3.....17.....	\$2,007
RTL2472L-1.....31.....	\$15,362	SSU2-10.....53.....	\$16,468	WHB1819-7.....64.....	\$1,359
RTL2472LR-1.....31.....	\$16,699	SSU2-2040-3.....51.....	\$16,959	WHB2221-7.....60.....	\$1,506
RTL2472R-1.....31.....	\$15,362	SSU3-00.....52.....	\$20,122	WHB2221-8.....60.....	\$1,506
S6407-316P-1.....13.....	\$1,249	SSU3-10.....53.....	\$23,794	WHB2221-RS.....60.....	\$391
S6408-1.....4.....	\$452	STL2454-1.....28.....	\$10,333	WHB2221-UC.....60.....	\$293
S6410PCB-1.....4.....	\$803	STL2454L-1.....28.....	\$11,629	WHB5222-7.....58.....	\$3,885
S6808-1.....4.....	\$469	STL2454LR-1.....28.....	\$12,924	WHB5222-PW.....94.....	\$123
S6808-316P-1.....13.....	\$1,250	STL2454R-1.....28.....	\$11,629	WHB5222-RS.....58.....	\$734
S6810-1.....4.....	\$803	STL2472-1.....28.....	\$13,570	WHBS181910-3.....65.....	\$3,262
S6810-316P-1.....13.....	\$1,588	STL2472L-1.....28.....	\$14,871	WSL2418-1.....32.....	\$6,596
SD01-001CFL.....70.....	\$943	STL2472LR-1.....28.....	\$16,163	WSL2418L-1.....32.....	\$8,069
SD01-001CFL-MF.....71.....	\$820	STL2472R-1.....28.....	\$14,871	WSL2418LR-1.....32.....	\$9,545
SD01-001SFL.....70.....	\$924	TL2454-1.....25.....	\$6,791	WSL2418R-1.....32.....	\$8,069
SD01-001SFL-MF.....71.....	\$801	TL2454-5.....25.....	\$7,343	WSL2424-1.....32.....	\$7,335
SD01-002CF.....70.....	\$831	TL2472-1.....25.....	\$8,418	WSL2424L-1.....32.....	\$8,808
SD01-002CF-MF.....71.....	\$707	TL2472-5.....25.....	\$8,929	WSL2424LR-1.....32.....	\$10,280
SD01-002SF.....70.....	\$809	UCD6405P-1.....10.....	\$1,042	WSL2424R-1.....32.....	\$8,808
SD01-002SF-MF.....71.....	\$685	UCD6408P-1.....10.....	\$1,091	WSS6713.....65.....	\$7,768
SD01-003CFL.....70.....	\$961	UCS4608-316P-1.....15.....	\$1,163	WT310E-7.....61.....	\$1,019
SD01-003CFL-MF.....71.....	\$839	UCS6105P-1.....10.....	\$815	WT400C-7.....61.....	\$1,340
SD01-003SFL.....70.....	\$981	UCS6805P-1.....10.....	\$807	WT500C-7.....61.....	\$1,500
SD01-003SFL-MF.....71.....	\$860	UCS6808-316P-1.....15.....	\$1,221	WT600C-7.....62.....	\$1,624
SD01-MFT.....71.....	\$609	UCS6808P-1.....10.....	\$854	WTL2454-1.....34.....	\$16,177
SDL2436-1.....27.....	\$8,391	UCS6810-316P-1.....15.....	\$1,382	WTL2454L-1.....34.....	\$17,654
SDL2436L-1.....27.....	\$9,683	V1114-5.....39.....	\$322	WTL2454LR-1.....34.....	\$19,128
SDL2436LR-1.....27.....	\$10,978	V1114-5D.....39.....	\$336	WTL2454R-1.....34.....	\$17,654
SDL2436R-1.....27.....	\$9,683	V1418-5.....39.....	\$396	WTL2472-1.....34.....	\$16,917
SDL2448-1.....27.....	\$9,037	V1418-6.....39.....	\$396	WTL2472L-1.....34.....	\$18,389
SDL2448L-1.....27.....	\$10,333	V1619-5-1.....40.....	\$466	WTL2472LR-1.....34.....	\$19,865
SDL2448LR-1.....27.....	\$11,629	V1619-5-3.....40.....	\$466	WTL2472R-1.....34.....	\$18,389
SDL2448R-1.....27.....	\$10,333	V1619-6-1.....40.....	\$477	WT-RS.....62.....	\$911

Index Price Group A

WTS2025-1.....21.....	\$4,605
WTS2031-1.....21.....	\$4,835
WTS2036-1.....21.....	\$5,948
WTS2048-1.....21.....	\$6,172
WTS2060-1.....21.....	\$6,547
WTS2072-1.....21.....	\$6,868
WTS2096-1.....21.....	\$7,437
WTS36-1.....21.....	\$5,307
WTS48-1.....21.....	\$5,504
WTS60-1.....21.....	\$5,838
WTS72-1.....21.....	\$6,130

Index Price Group B : Drinking Fountains

030774-006.....91.....	\$457	KEPWEBQ.....73.....	\$4,435
032799-005.....91.....	\$334	KEPWSBF.....76.....	\$1,654
035607-108.....91.....	\$166	KEPWSBFF.....76.....	\$1,829
F037116-101.....91.....	\$285	KEPWSMEBF-STN....77.....	\$2,794
F041145-001.....91.....	\$285	KEPWSMEBQ-STN...73.....	\$4,694
F041253-001.....91.....	\$503	KEPWSMSBF-STN....77.....	\$2,480
KEO41208-101.....86.....	\$1,219	KER12.....89.....	\$3,205
KEO41208-301.....87.....	\$3,214	KER1P.....89.....	\$1,685
KEM8WR-EBF-STN...79.....	\$11,301	KER5.....89.....	\$2,253
KEMW8EBF-STN.....78.....	\$9,618	KER8.....89.....	\$2,824
KEMW8EBQ-STN.....78.....	\$7,108		
KEMW8SBF-STN.....78.....	\$7,317		
KEMWSM8EBF-STN 78.....	\$10,641		
KEP8AC-EBF-GRY...80.....	\$4,506		
KEP8AC-EBF-STN...80.....	\$4,896		
KEP8AC-EBQ-GRY...74.....	\$7,107		
KEP8AC-EBQ-STN...74.....	\$7,446		
KEP8AC-SBFF-GRY..81.....	\$4,038		
KEP8AC-SBFF-STN...81.....	\$4,759		
KEP8AC-SBF-STN....81.....	\$4,620		
KEP8ACSL-EBF-STN84.....	\$7,226		
KEP8ACSL-EBQ-GRY75.....	\$8,651		
KEP8ACSL-EBQ-STN75.....	\$8,988		
KEP8ACSL-GRY.....87.....	\$3,787		
KEP8ACSL-SBF-STN84.....	\$6,237		
KEP8ACSL-STN.....87.....	\$4,079		
KEP8ACSLT-GRY.....87.....	\$8,393		
KEP8ACSLT-STN.....87.....	\$8,798		
KEP8AC-STN.....86.....	\$2,279		
KEP8ACT-EBFF-GRY80.....	\$7,216		
KEP8ACT-EBFF-STN80.....	\$7,792		
KEP8ACT-GRY.....86.....	\$3,888		
KEP8ACT-STN.....86.....	\$5,019		
KEPAC-EBQ-GRY.....74.....	\$5,076		
KEPAC-EBQ-STN.....74.....	\$5,415		
KEPAC-GRY.....86.....	\$1,712		
KEPAC-SBF-GRY.....81.....	\$3,628		
KEPAC-SBF-STN.....81.....	\$3,977		
KEPACSL-EBF-GRY..84.....	\$4,634		
KEPACSL-EBF-STN..84.....	\$5,389		
KEPACSL-EBQ-GRY..75.....	\$6,621		
KEPACSL-EBQ-STN..75.....	\$6,958		
KEPACSL-SBF-GRY..84.....	\$4,428		
KEPACSL-SBF-STN..84.....	\$5,322		
KEPAC-STN.....86.....	\$1,956		
KEPV8AC-EBF-STN 82.....	\$6,953		
KEPV8AC-SBF-STN 82.....	\$4,656		
KEPV8ACSL-14G.....88.....	\$10,003		
KEPV8ACSL-EBF-STN83.....	\$9,339		
KEPV8ACSL-SBF-STN83.....	\$4,861		
KEPV8ACSL-STN.....88.....	\$5,138		
KEPV8AC-STN.....88.....	\$3,298		
KEPVAC-SBF-STN...82.....	\$3,755		
KEPVACSL-SBF-STN83.....	\$4,544		
KEPWEBF.....76.....	\$2,027		
KEPWEBFF.....76.....	\$2,230		

Terms & Conditions & Warranty

Our General Terms and Conditions of Sale are exclusively applicable to the sale and delivery of our products. The respective valid version is available on:

<https://www.franke.com/ca/en/home-solutions/general-terms-and-conditions-of-sale.html>



FRANKE HOME SOLUTIONS WARRANTY EFFECTIVE SEPTEMBER 1, 2022

In the United States, Canada and Latin America, Franke warrants the products from manufacturing defects in material and workmanship when purchased from Franke or a Franke Authorized Retailer pursuant to product-specific warranties detailed herein (each, a “Warranty” and collectively, the “Warranties”). The products must be properly installed, per company’s installations instructions, in its original installation, and used in normal indoor residential kitchen applications. Any products or components which have been modified or altered, from its original intended condition will void the warranty. The Franke Warranties are limited to the original purchaser and are non-transferrable. These Warranties do not include products purchased from non-Authorized Retailers, products that are obsolete or discontinued, or products that were previous display models. All issues with installed products are considered warranty claims and not subject to the Return Policy. Franke reserves the right to inspect any product reported to be defective and the original installation prior to providing a replacement product and/or component. All decisions are final. In no situation shall the liability of Franke exceed the amount of the original purchase price.

The Warranties do not cover, and Franke shall not be liable for, any damage to products or components resulting from misuse or abuse, accidental damages, normal wear such as scuffs, scratches or finish reduction/fading; improper installation, abnormal usage, negligence, damage caused by improper maintenance or cleaning. Damage caused by impurities, corrosive chemicals or acts beyond Franke’s control are not covered by any Warranty.

Franke product replacements do not include transportation, shipping, diagnosis, labor, installation, removal, disposal for any products or liability for project delays. Product replacements are not guaranteed to be exact replacements. The owner of a product is liable for any transportation and re-installation costs related to any warranty for such product. If the original product is not available at the time of the warranty claim, at Franke’s option, the product replacements will be of similar size, material, and value. Any products or components which have been modified or altered, from its original intended condition will void the warranty.

The Warranties do not allow recovery of incidental or consequential damages such as loss of use, delay, property damage or other consequential damage, and Franke accepts no liability for such damages. Each Warranty is limited to the conditions set forth herein and to the applicable warranty period specified herein and is exclusive. EXCEPT FOR THE WARRANTIES SET FORTH HEREIN, FRANKE MAKES NO WARRANTY WHATSOEVER WITH RESPECT TO THE PRODUCTS, INCLUDING, BUT NOT LIMITED TO, (1) ANY WARRANTY OF MERCHANTABILITY, (2) WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, (3) WARRANTY OF TITLE, OR (4) WARRANTY AGAINST INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS OF A THIRD PARTY, WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE. LEGAL DISCLAIMER PLEASE READ CAREFULLY. Franke Home Solutions North America, LLC/Franke Kindred Canada Limited provides the above information to you as a public service to our customers. By accessing and using this information, you agree to the following and to comply with all applicable laws. If you do not agree with these terms and conditions, do not use this information. While we try to keep the information current, changes may have occurred since its creation. Contact your Regional Manager or Customer Service to verify information regarding Franke Home Solutions North America, LLC/Franke Kindred Canada programs and their use by you.

Warranty

Every Franke Commercial product is guaranteed to be suitable for any normal purpose for which it is intended and without defects in material or workmanship for the following periods of time, provided it has been installed and maintained according to Franke Commercial instructions.

- Stainless steel topmount sinks, undermount, wall mount basins
 - 5 year warranty
- Stainless steel scullery sinks, mop and sewage sampling sinks
 - 1 year warranty
- Aquarius and Ozo-flo touch-free faucets
 - 5 year warranty on faucet body, cables & plug-in power supply (if equipped)
 - 1 year on solenoid valve
- HHF-series touch-free faucets
 - 1 year warranty on faucet body, cables & plug-in power supply (if equipped)
- Custom and fabricated products
 - 1 year warranty
- Drain fittings and waste parts
 - 1 year warranty
- Electronic water controls
 - 1 year warranty
- Solid surface wall hung sinks
 - 2 year warranty on sinks
 - 1 year warranty on electronics of Medi-flo
- Aqua-foam soap dispensers
 - 1 year warranty
- Drinking fountains, non-chilled
 - 1 year warranty
- Drinking fountains, chilled
 - 5 year warranty on sealed refrigerated systems
 - 1 year warranty on fountain part accessories

Pricing Effective January 1, 2026



Franke Kindred Canada
1000 Franke Kindred Road
Midland, ON L4R 4K9
commercial-info.ca@franke.com
franke.com

Canada - English
#CMCLCATCAEN26