


Icon




EN Installation and service manual

Kitchen Tap

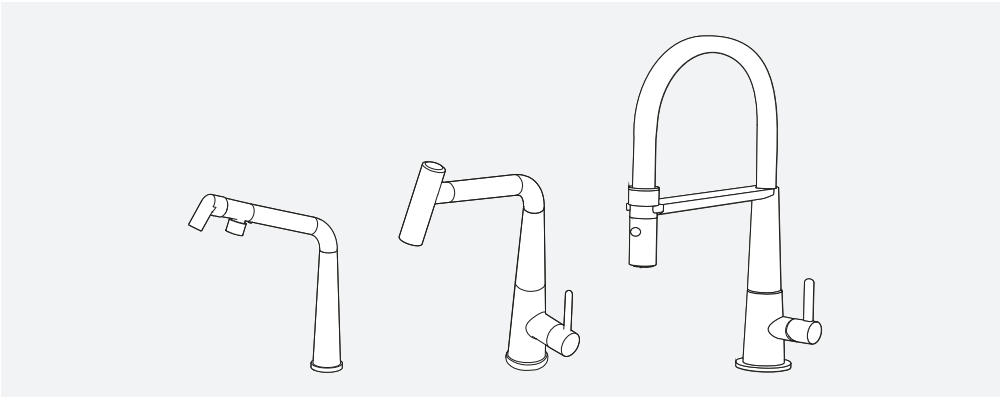





A Swivel





B Pull Out




C Semi-Pro





A


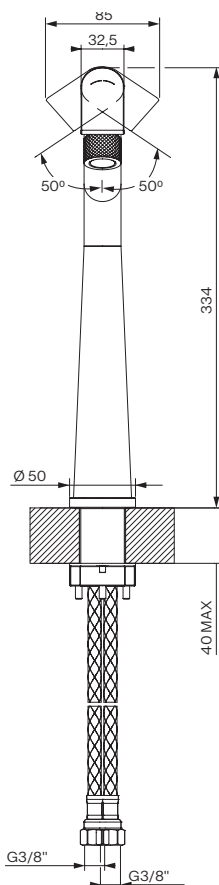
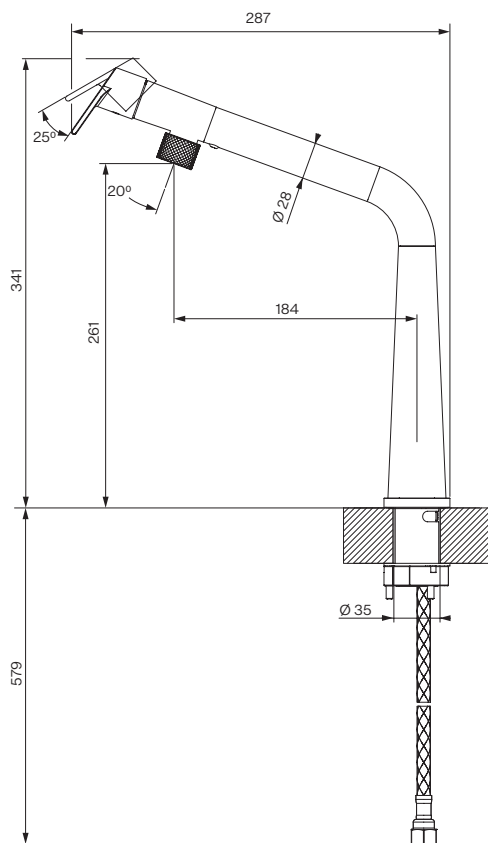



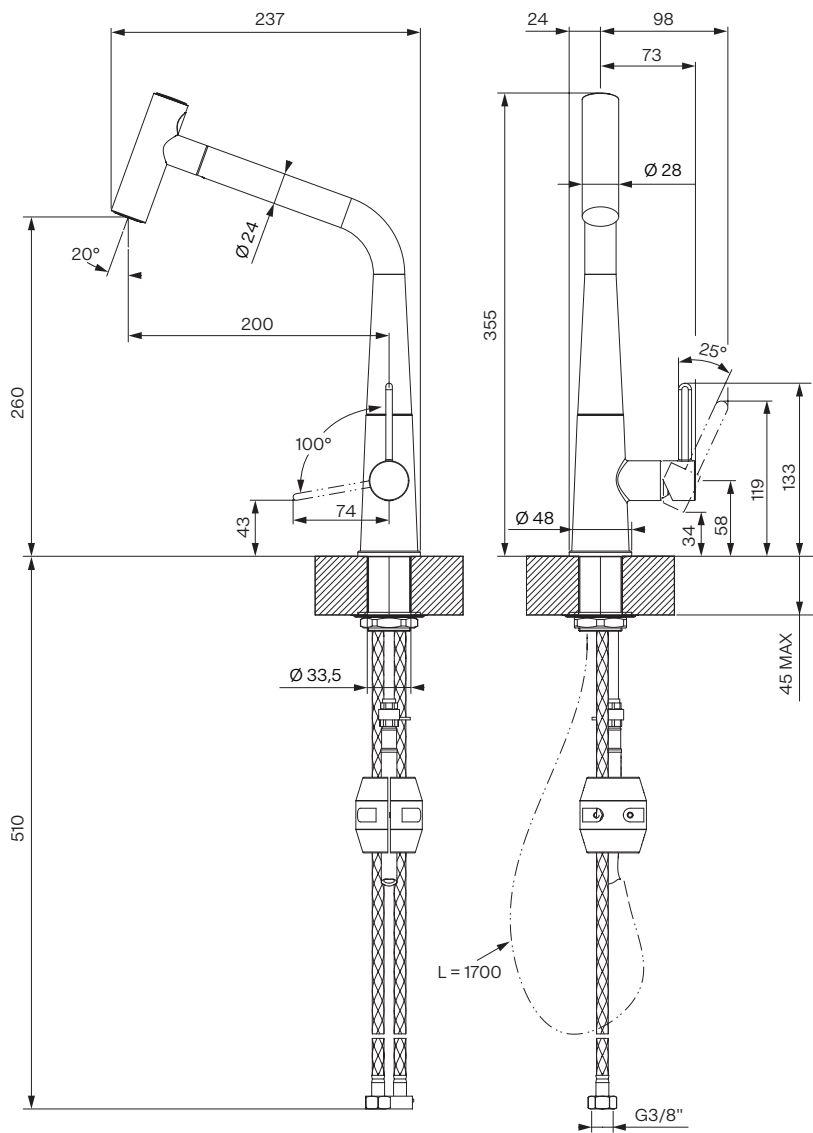
**B**



C

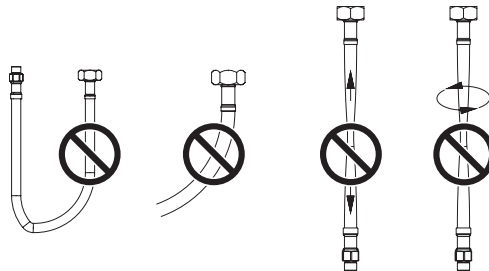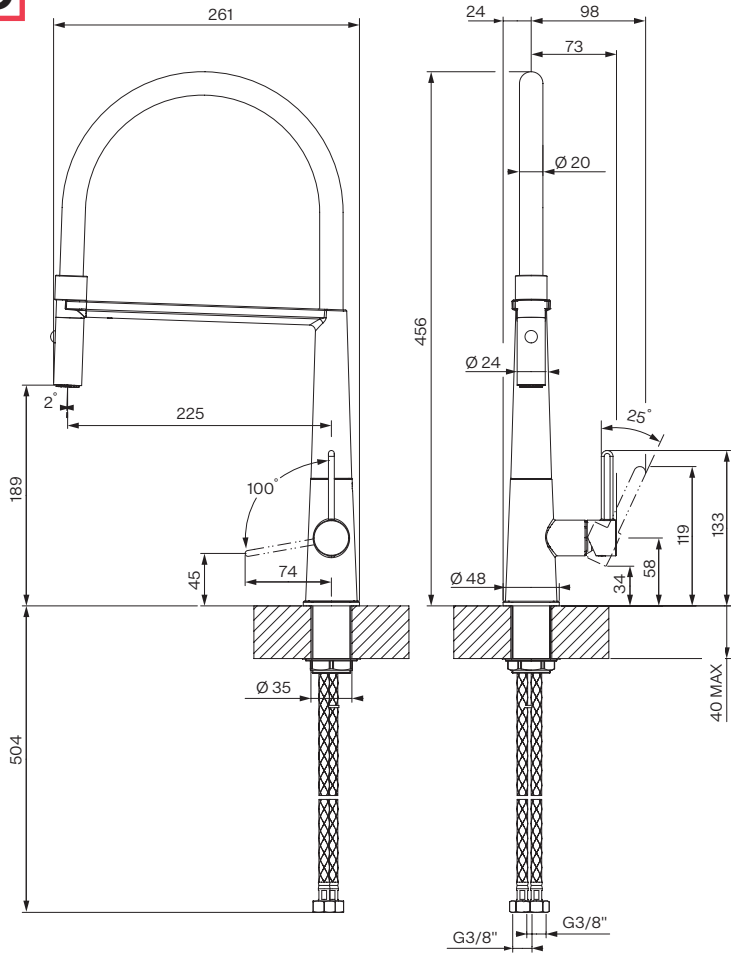

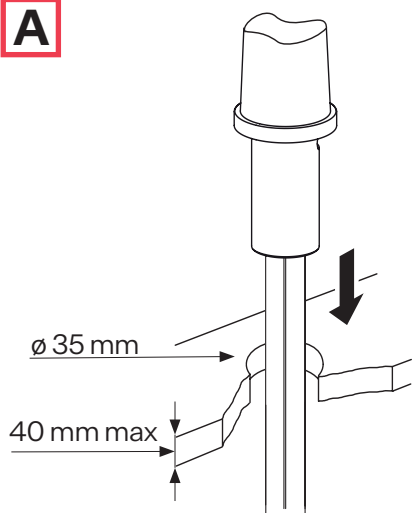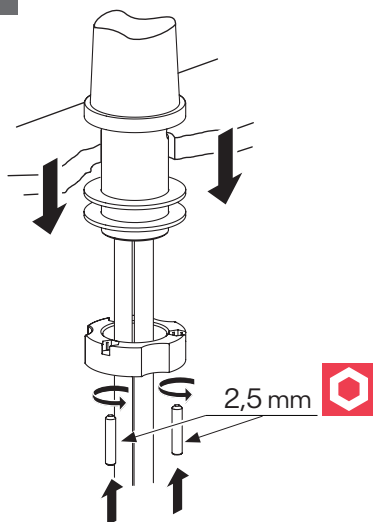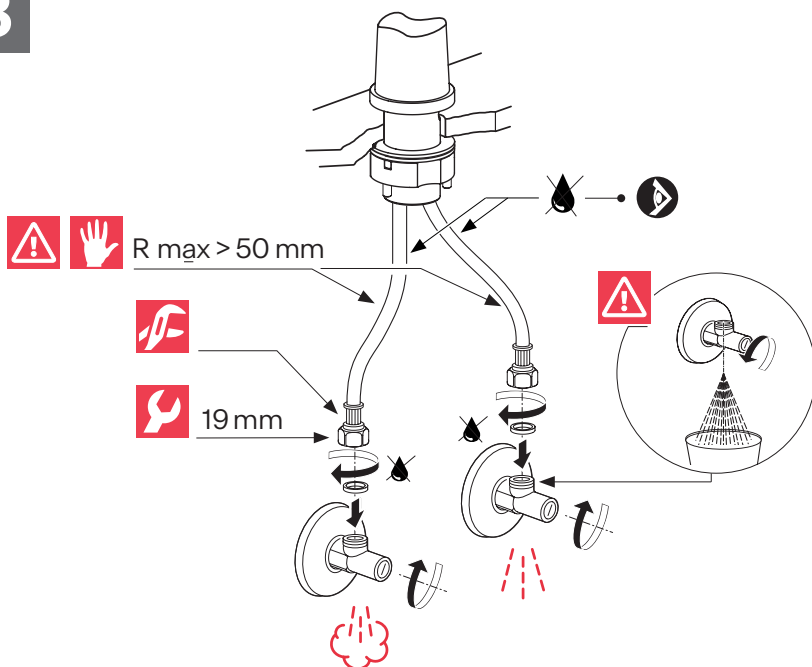**1****A****2****3**

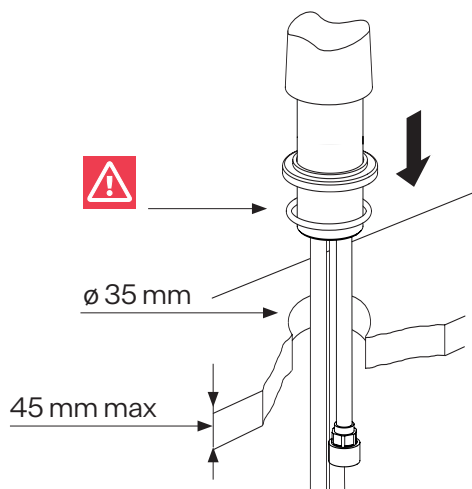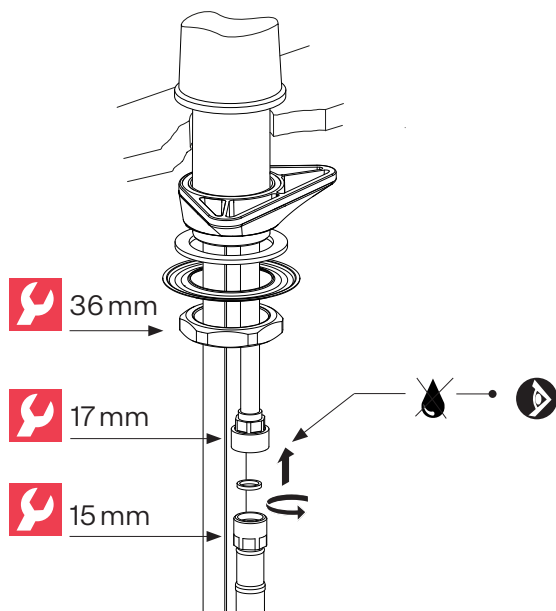**1****B****2**



Ø 35 mm

40 mm max.




R max $\geq$ 50 mm




19 mm




4 **A**




5 **A**




6 **A**




4 **B**




5 **B**




6 **B**




4 **C**




5 **C**




6 **C**




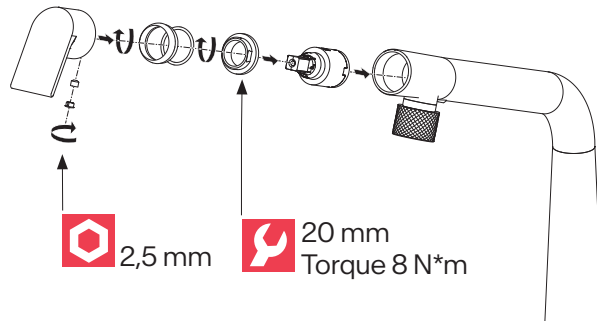**A**


2,5 mm

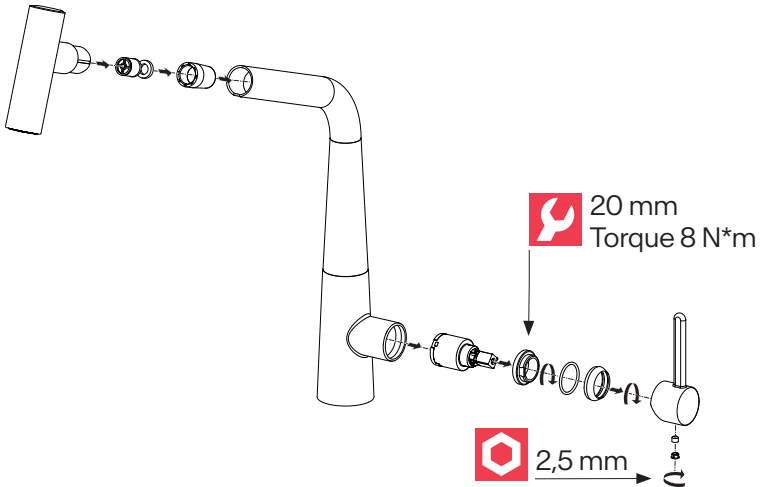20 mm
Torque 8 N*m**B**20 mm
Torque 8 N*m

2,5 mm

C20 mm
Torque 8 N*m

2,5 mm

**franke.com**



Periodic checks

- ▶ Check connection and shower hoses periodically for the following:
 - Watertightness
 - Corrosion
 - Mechanical damage
- ▶ Use original spare parts only.
- ▶ Replace damp or dripping hoses.
- ▶ Replace hoses with rusty or oxidized surfaces.
- ▶ Replace hoses that show signs of mechanical damage.




- ▶ Flush all pipes thoroughly before installation.

Operating data	Value		
Operating pressure (ideal)	3 bar	45 PSI	300 kPa
Operating pressure (max.)*	5 bar	70 PSI	500 kPa
Operating pressure (min.)*	1 bar	14.5 PSI	100 kPa
Water temperature (ideal)	60°C	140°F	
Water temperature (max.)	70°C	158°F	


* Equal pressure is recommended.




Icon Swivel

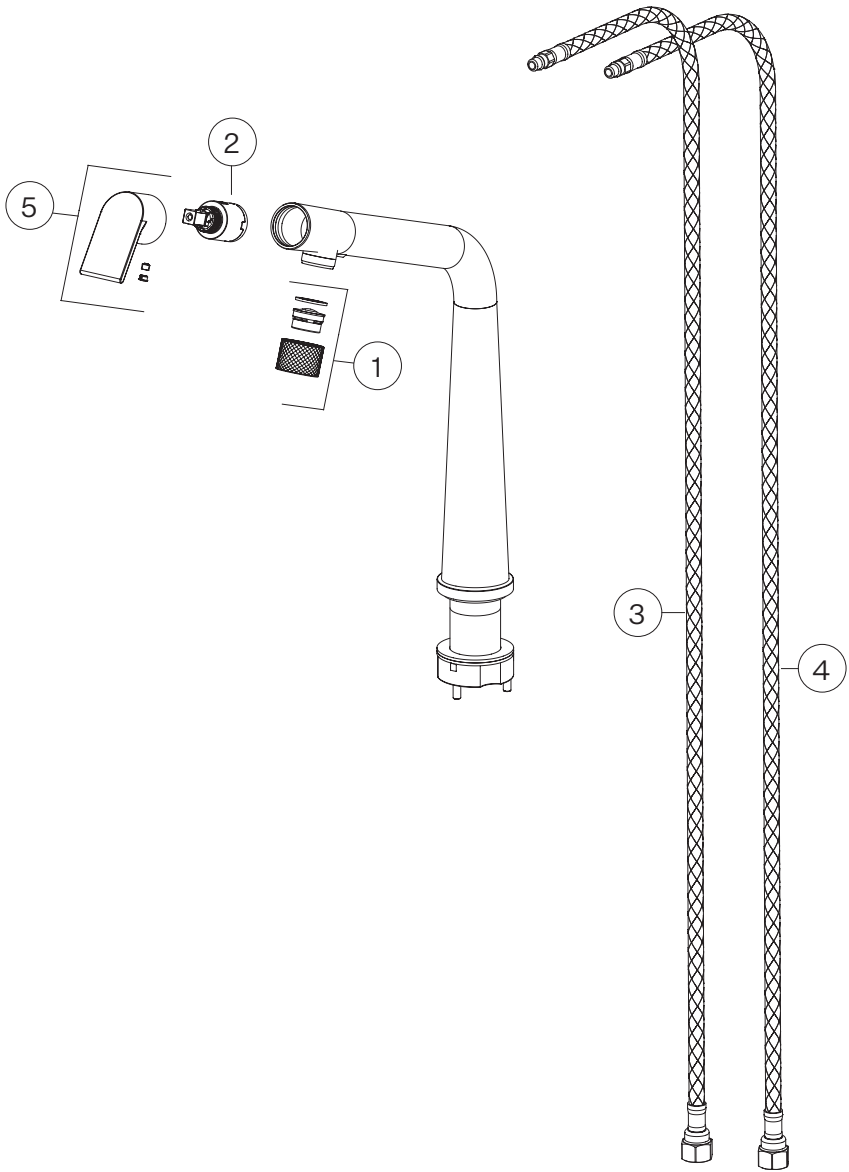

B Icon Pull Out

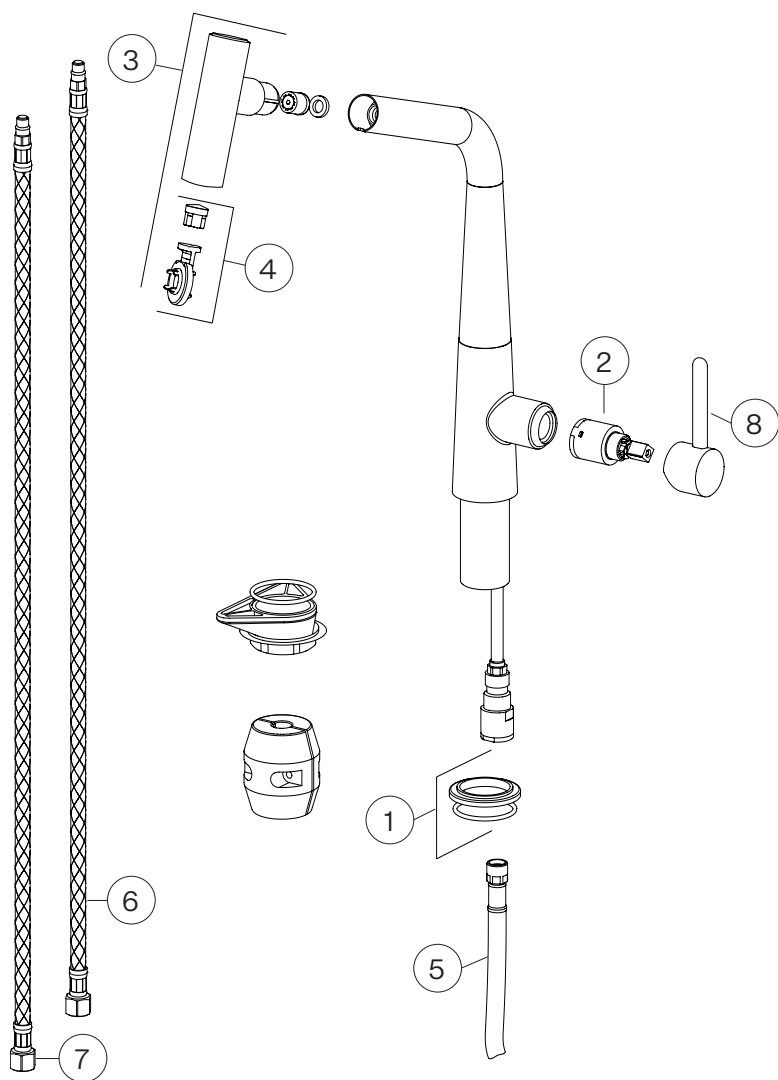

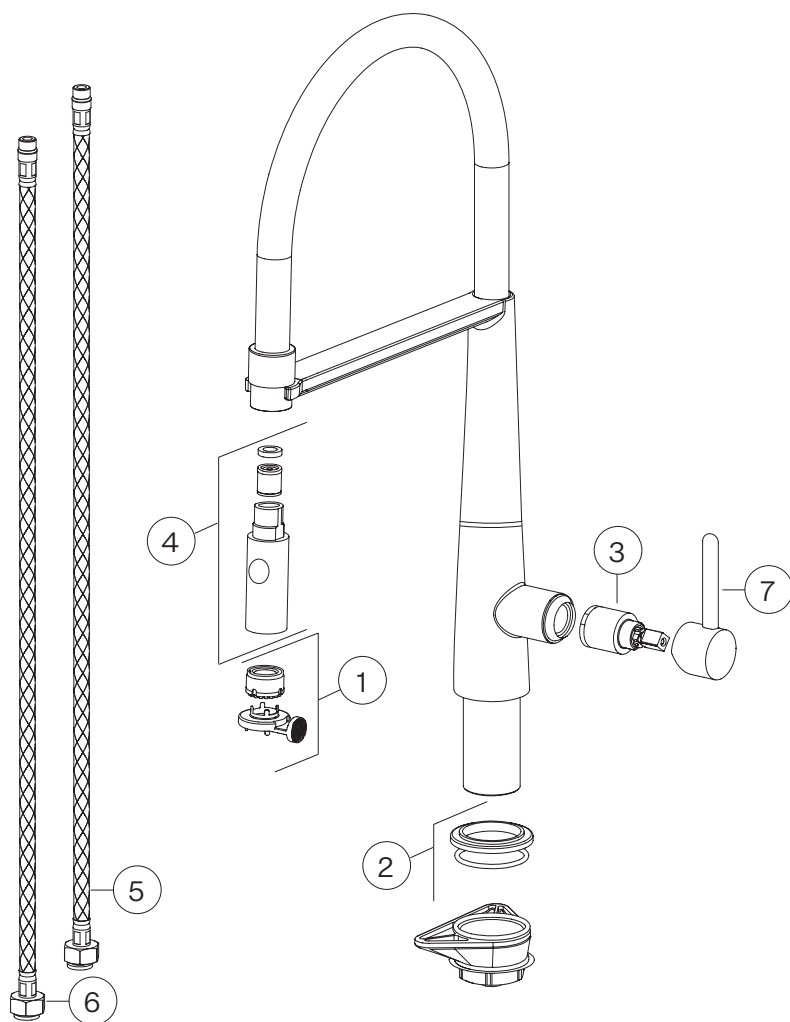

United Kingdom Franke
UK Ltd. Manchester M22
5WB Phone +44 161 436
6280

www.franke.com

