

A close-up photograph of a person's hands being washed in a commercial stainless steel sink. The hands are covered in white soap foam. A modern, curved chrome faucet is positioned over the sink. The background is a blurred view of a commercial kitchen with white countertops and cabinets.

FRANKE

COMMERCIAL

2025 • 2026

COMMERCIAL 2025 • 2026

PRODUCT CATEGORIES

- 02 Stainless steel sinks
- 17 Type 316 laboratory sinks
- 26 Utility & scullery
- 42 Vanity basins
- 48 Healthcare
- 61 Hand wash basins
- 70 Washroom accessories
- 76 Drinking fountains
- 98 Waste fittings
- 102 High security
- 104 Custom solutions
- 106 Faucet hole drilling diagrams
- 107 Care & maintenance
- 108 Corrosion resistance information
- 110 Index
- 112 Terms & conditions
- 113 Warranty





Stainless Steel Sinks



Guaranteed to maintain their functionality over time, Franke Commercial stainless steel sinks remain brilliant and easy to clean. Stainless steel is the material of choice for commercial environments where durability, hygiene, and functionality matter most.

Franke Commercial stainless steel sinks have been engineered for quick and easy installation.

Our patented EZ Torque™ fasteners mean a Franke sink will **install five times faster** than the competition. One-handed drop and drill installation: fasteners come pre-installed on the sink meaning you can simply drop the sink into the countertop and use a drill to tighten the fasteners.

Factory applied rimseal simplifies installation. No need for silicone for the sink rim eliminates a messy step from the install process.



Satin finish

A #4 satin finished bowl and deck allows scratches to be blended into the grain line. An ideal finish for commercial applications.



EZ Torque™ fasteners

Install a Franke Commercial topmount sink in two easy steps: drop and drill. Bright red EZ Torque™ fasteners are easy to spot and can be tightened with a drill in seconds.



Rimseal pre-installed

Installing a Franke Commercial topmount sinks is quick and easy. A factory-applied Rimseal means fewer installation steps and less mess.




Waste fitting included

Most Franke Commercial sinks are sold with a stainless steel waste kit included in the box. These high quality waste assemblies are also available separately.

Single bowl topmount no faucet ledge, 20 gauge



Model S9106-1 shown



Single compartment self rimming topmount sink, 20 gauge (0.9 mm), type 302 (CNS 18/8) stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Certified to ASME A112.19.3/CSA B45.4.




	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	S9106-1	11 1/4" (286 mm)	13 5/8" (346 mm)	9 1/4" (235 mm)	11 5/8" (295 mm)	6" (152 mm)	C	20	\$ 349
	S6408-1	18 1/8" (460 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	20	\$ 435
	S6808-1	18 1/8" (460 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	20	\$ 451
	S6810-1	18 1/8" (460 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	C	20	\$ 772
	S7308-1	19 1/4" (489 mm)	25 1/4" (641 mm)	17" (432 mm)	23" (584 mm)	8" (203 mm)	CB	20	\$ 697

Single bowl topmount no faucet ledge, 18 gauge



Model S6410PCB-1 shown




Single compartment self rimming topmount sink, 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Certified to ASME A112.19.3/CSA B45.4.



	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	AS6105P-1	18 1/8" (460 mm)	23 1/8" (587 mm)	16" (406 mm)	21" (533 mm)	5" (127 mm)	CB	18	\$ 821
	S6410PCB-1	18 1/8" (460 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	10" (254 mm)	CB	18	\$ 772
	S7314P-1	19 5/8" (498 mm)	25 5/8" (651 mm)	17 1/2" (445 mm)	23 1/2" (597 mm)	14" (356 mm)	C	18	\$ 2,575
	S8014P-1	20 1/8" (511 mm)	22 1/8" (562 mm)	18" (457 mm)	20" (508 mm)	14" (356 mm)	C	18	\$ 2,620

Single bowl topmount with faucet ledge, 20 gauge



Model LBS6808-1 shown



Single compartment self rimming topmount sink with faucet ledge, 20 gauge (0.9 mm), type 302 (CNS 18/8) stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece.

Certified to ASME A112.19.3/CSA B45.4.

Faucet hole options (add to part number when ordering):

- 1 1 hole, centered
- 2 2 hole, 4" spread
- 3 3 hole, 8" spread

	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	LBS9106-1	13 3/4" (349 mm)	13 5/8" (346 mm)	9 1/4" (235 mm)	11 5/8" (295 mm)	6" (152 mm)	C	1,2	\$ 349
•	LBS1306-1	15 7/16" (392 mm)	15 1/8" (384 mm)	11" (279 mm)	13" (330 mm)	6" (152 mm)	C	1,2	\$ 408
	LBS2708-1	17" (432 mm)	19 1/8" (486 mm)	12" (305 mm)	17" (432 mm)	8" (203 mm)	C	1,3	\$ 495
	LBS4607-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	7" (178 mm)	C	1,3	\$ 595
•	ALBS6805-1	20 9/16" (522 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	5" (127 mm)	LR	1,3	\$ 553
	LBS6807-1	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	7" (178 mm)	CB	1,3	\$ 363
	LBS6807-2	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	7" (178 mm)	CB	1,3	\$ 412
	LBS6808-1	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	1,3	\$ 463
	LBS6808-2	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	1,3	\$ 505
	LBS6810-1	20 9/16" (522 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	C	1,3	\$ 800
	LBS7508-1	22" (559 mm)	17 1/4" (438 mm)	17" (432 mm)	15" (381 mm)	8" (203 mm)	CB	1,3	\$ 567
	LBS7308-1	22 1/16" (560 mm)	25 5/8" (651 mm)	17" (432 mm)	23" (584 mm)	8" (203 mm)	CB	1,3	\$ 741


Models ending in -1: 3 1/2" stainless steel crumb cup strainer assembly with 1 1/2" tailpiece included

Models ending in -2 have overflow: 3 1/2" stainless steel crumb cup strainer assembly with overflow and 1 1/2" tailpiece included

Single bowl topmount with faucet ledge, 18 gauge



Model LBS4608P-1 shown



Single compartment self rimming topmount sink, 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Certified to ASME A112.19.3/CSA B45.4

Faucet hole options (add to part number when ordering):

- 1 1 hole, centered
- 2 2 hole, 4" spread
- 3 3 hole, 8" spread




	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
	• ALBS1306P-1	15 7/16" (392 mm)	15 1/8" (384 mm)	11" (279 mm)	13" (330 mm)	6" (152 mm)	C	1,2	\$ 547
	LBS1308P-1	15 7/16" (392 mm)	15 1/8" (384 mm)	11" (279 mm)	13" (330 mm)	8" (203 mm)	C	1,2	\$ 766
	• ALBS2706P-1	17" (432 mm)	19 1/8" (486 mm)	12" (305 mm)	17" (432 mm)	6" (152 mm)	C	1,3	\$ 850
	LBS2708P-1	17" (432 mm)	19 1/8" (486 mm)	12" (305 mm)	17" (432 mm)	8" (203 mm)	C	1,3	\$ 863
	• ALBS4406P-1	18 13/16" (478 mm)	16 1/8" (410 mm)	14" (356 mm)	14" (356 mm)	6" (152 mm)	CB	1,3	\$ 810
	LBS4408P-1	18 13/16" (478 mm)	16 1/8" (410 mm)	14" (356 mm)	14" (356 mm)	8" (203 mm)	CB	1,3	\$ 830
	LBS4410P-1	18 13/16" (478 mm)	16 1/8" (410 mm)	14" (356 mm)	14" (356 mm)	10" (254 mm)	CB	1,3	\$ 1,136
	• ALBS4605P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	5" (127 mm)	C	1,3	\$ 820
	• ALBS4606P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	6" (152 mm)	C	1,3	\$ 876
	LBS4608P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	8" (203 mm)	C	1,3	\$ 648
	LBS4610P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	10" (254 mm)	C	1,3	\$ 893
	• ALBS4006P-1	18 13/16" (478 mm)	22 1/8" (562 mm)	14" (356 mm)	20" (508 mm)	6" (152 mm)	CB	1,3	\$ 914
	LBS4008P-1	18 13/16" (478 mm)	22 1/8" (562 mm)	14" (356 mm)	20" (508 mm)	8" (203 mm)	CB	1,3	\$ 932
	LBS4010P-1	18 13/16" (478 mm)	22 1/8" (562 mm)	14" (356 mm)	20" (508 mm)	10" (254 mm)	CB	1,3	\$ 1,234
	• ALBS6406P-1	20 9/16" (522 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	6" (152 mm)	CB	1,3	\$ 907
	LBS6408P-1	20 9/16" (522 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1,3	\$ 686
	LBS6410PCB-1	20 9/16" (522 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	10" (254 mm)	CB	1,3	\$ 877
	• ALBS6805P-1	20 9/16" (522 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	5" (127 mm)	LR	1,3	\$ 888
	• ALBS6806P-1	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	6" (152 mm)	CB	1,3	\$ 907
	LBS6808P-1	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	1,3	\$ 557
	LBS6810P-1	20 9/16" (521 mm)	20 1/8" (508 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	C	1,3	\$ 915
	• ALBS6106P-1	20 13/16" (529 mm)	23 1/8" (587 mm)	16" (406 mm)	21" (533 mm)	6" (152 mm)	CB	1,3	\$ 1,031
	LBS6108P-1	20 13/16" (529 mm)	23 1/8" (587 mm)	16" (406 mm)	21" (533 mm)	8" (203 mm)	CB	1,3	\$ 1,013
	LBS6110P-1	20 13/16" (529 mm)	23 1/8" (587 mm)	16" (406 mm)	21" (533 mm)	10" (254 mm)	CB	1,3	\$ 1,280

more next page >>

Single bowl topmount with faucet ledge, 18 gauge



Model LBS7008P-1 shown



Single compartment self rimming topmount sink, 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Certified to ASME A112.19.3/CSA B45.4.

Faucet hole options (add to part number when ordering):

- 1 1 hole, centered
- 3 3 hole, 8" spread

	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	ALBS7006P-1	21 13/16" (554 mm)	22 1/8" (562 mm)	17" (432 mm)	20" (508 mm)	6" (152 mm)	CB	1,3	\$ 985
	LBS7008P-1	21 13/16" (554 mm)	22 1/8" (562 mm)	17" (432 mm)	20" (508 mm)	8" (203 mm)	CB	1,3	\$ 1,007
•	ALBS7506P-1	22" (559 mm)	17 1/4" (438 mm)	17" (432 mm)	15" (381 mm)	6" (152 mm)	CB	1,3	\$ 841
	LBS7508P-1	22" (559 mm)	17 1/4" (438 mm)	17" (432 mm)	15" (381 mm)	8" (203 mm)	CB	1,3	\$ 860
•	ALBS7306P-1	22 1/16" (560 mm)	25 5/8" (651 mm)	17" (432 mm)	23" (584 mm)	6" (152 mm)	CB	1,3	\$ 1,031
	LBS7308P-1	22 1/16" (560 mm)	25 5/8" (651 mm)	17" (432 mm)	23" (584 mm)	8" (203 mm)	CB	1,3	\$ 1,051
	LBS7310P-1	22 1/16" (560 mm)	25 5/8" (651 mm)	17" (432 mm)	23" (584 mm)	10" (254 mm)	CB	1,3	\$ 1,350
	LBS7312P-1	22 1/16" (560 mm)	25 5/8" (651 mm)	17 1/2" (445 mm)	23 1/2" (597 mm)	12" (305 mm)	C	1,3	\$ 1,553
	LBS7314P-1	22 9/16" (573 mm)	25 5/8" (651 mm)	17 1/2" (445 mm)	23 1/2" (597 mm)	14" (356 mm)	C	1,3	\$ 3,010
•	ALBS7806P-1	22" (559 mm)	30 1/8" (765 mm)	17" (432 mm)	28" (711 mm)	6" (152 mm)	CB	1,3	\$ 1,241
	LBS7808P-1	22" (559 mm)	30 1/8" (765 mm)	17" (432 mm)	28" (711 mm)	8" (203 mm)	CB	1,3	\$ 1,257
	LBS8014P-1	23 1/8" (587 mm)	22 1/8" (562 mm)	18" (457 mm)	20" (508 mm)	14" (356 mm)	C	1,3	\$ 2,921


Double bowl topmount no faucet ledge



Double bowl, no faucet ledge, 20 gauge D6408-1

Double compartment self rimming topmount sink, with Spillway partition in 20 gauge (0.9 mm), type type 302 (CNS 18/8) stainless steel. Polished #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **18 7/16 x 31 1/4"** Inside bowl **16 x 14 x 8"** Waste location **Center back** Minimum cabinet size **36"**


\$ 711

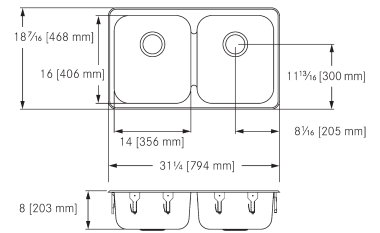


Double bowl, no faucet ledge, 18 gauge D0814P-1

Double compartment self rimming topmount sink, 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **22 x 39"** Inside bowl **20 x 20 x 14"** Waste location **Center** Minimum cabinet size **48"**

\$ 4,639

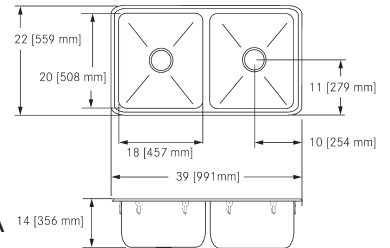

Double bowl topmount with faucet ledge, 20 gauge

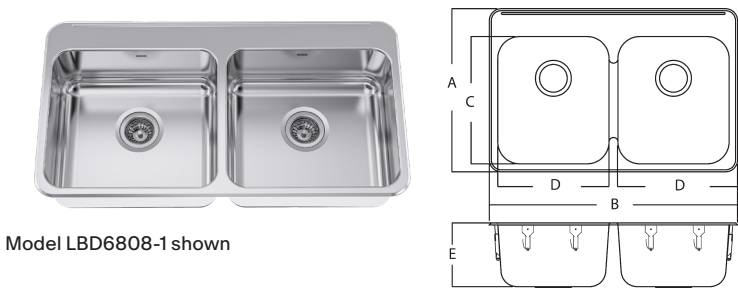


Model LBD6808-1 shown



Double compartment self rimming topmount, 20 gauge (0.9 mm), type 302 (CNS 18/8) stainless steel. #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4

Faucet hole options (add to part number when ordering):
-1 1 hole, centered over partition
-3 3 hole, 8" spread, centered over partition

	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	ALBD6405-1	20 1/2" (521 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	5" (127 mm)	LR, RR	1, 3	\$ 784
	LBD6407-1	20 1/2" (521 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	7" (178 mm)	CB	1, 3	\$ 626
	LBD6408-1	20 1/2" (521 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1, 3	\$ 754
	LBD6808-1	20 9/16" (522 mm)	39 3/16" (995 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	1, 3	\$ 1,012
	LBD7508-1	22" (559 mm)	33 1/4" (845 mm)	17" (432 mm)	15" (381 mm)	8" (203 mm)	CB	1, 3	\$ 1,031


Topmount stainless steel sinks engineered for quick and easy installation

Factory installed rimseal
 Eliminates the need for silicone



Contractors and installers love the ease of installation of the Franke Rimseal. Simply peel off the backing and the sink is ready to install. No silicone mess.

EZ Torque™ fasteners
 Preinstalled on the sink, drop and drill installation

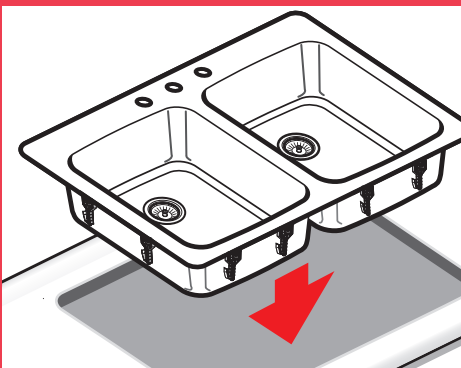


Secure the sink rim to the countertop in two easy steps. Drop the sink into the countertop then tighten with a drill. Clamps are preinstalled to sink, and won't get lost on the job site or left behind in the box.

Double bowl topmount with faucet ledge, 18 gauge



Model LBD7310P-1 shown



Double compartment self rimming topmount sink, 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. #4 satin finished. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners.

Certified to ASME A112.19.3/CSA B45.4

Faucet hole options (*add to part number when ordering*):

- 1 1 hole, centered over partition
- 2 2 hole, 8" spread
- 3 3 hole, 8" spread, centered over partition



	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
	LBD1308P-1	15 13/16" (402 mm)	29 1/4" (743 mm)	11" (279 mm)	13" (330 mm)	8" (203 mm)	C	1,3	\$ 1,128
•	ALBDC182605P-1	18 1/4" (464 mm)	26 5/8" (677 mm)	16" (406 mm)	14" (356 mm)	6" (153 mm)	CB	2	\$ 1,390
•	ALBD4405P-1	18 13/16" (478 mm)	31 1/4" (794 mm)	14" (356 mm)	14" (356 mm)	5" (127 mm)	CB	1,3	\$ 1,286
•	ALBD4406P-1	18 13/16" (478 mm)	31 1/4" (794 mm)	14" (356 mm)	14" (356 mm)	6" (152 mm)	CB	1,3	\$ 1,304
	LBD4408P-1	18 13/16" (478 mm)	31 1/4" (794 mm)	14" (356 mm)	14" (356 mm)	8" (203 mm)	CB	1,3	\$ 1,324
	LBD4410P-1	18 13/16" (478 mm)	31 1/4" (794 mm)	14" (356 mm)	14" (356 mm)	10" (254 mm)	CB	1,3	\$ 1,741
•	ALBD6405P-1	20 1/2" (521 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	5" (127 mm)	RC	1,3	\$ 1,045
•	ALBD6406P-1	20 1/2" (520 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	6" (152 mm)	CB	1,3	\$ 1,062
	LBD6408P-1	20 1/2" (520 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1,3	\$ 1,078
	LBD6410PCB-1	20 13/16" (529 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	10" (254 mm)	CB	1,3	\$ 1,549
•	ALBD7506P-1	22" (559 mm)	33 1/4" (845 mm)	17" (432 mm)	15" (381 mm)	6" (152 mm)	CB	1,3	\$ 1,485
	LBD7508P-1	22" (559 mm)	33 1/4" (845 mm)	17" (432 mm)	15" (381 mm)	8" (203 mm)	CB	1,3	\$ 1,508
	LBD7510P-1	22" (559 mm)	33 1/4" (845 mm)	17" (432 mm)	15" (381 mm)	10" (254 mm)	CB	1,3	\$ 1,999
	LBD7310P-1	22" (559 mm)	49 3/8" (1254 mm)	17" (432 mm)	23" (584 mm)	10" (254 mm)	C	1,3	\$ 2,673
	LBD0814P-1	25" (635 mm)	39" (991 mm)	20" (508 mm)	18" (457 mm)	14" (356 mm)	C	1,3	\$ 4,890

Triple bowl topmount with faucet ledge



Triple bowl with faucet ledge, 20 gauge LBT6407CB-1

Triple compartment self rimming topmount sink with faucet ledge, 20 gauge (0.9mm), type 302 (CNS 18/8) stainless steel. Polished #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.


Outside dimensions **20 9/16" x 46 3/8"**

Inside bowl **16 x 14 x 7"**

Waste location **Center back**

Custom cabinet required

\$ 1,562

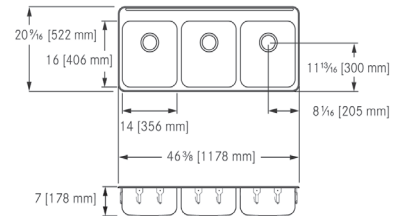

Triple bowl with faucet ledge, 18 gauge LBT6410PCB-1

Triple compartment self rimming topmount sink with faucet ledge, 18 gauge (1.2mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.


Outside dimensions **20 9/16" x 46 3/8"**

Inside bowl **16 x 14 x 10"**


Waste location **Center back**

Custom cabinet required

\$ 2,814

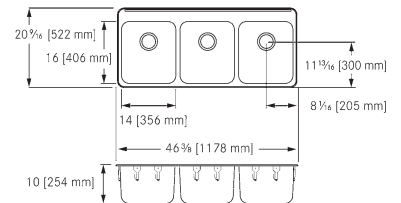

Single bowl undermount, 18 gauge



Single compartment undermount sink in 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finished. Undercoated to reduce condensation and resonance. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Template and installation instructions included.


Certified to ASME A112.19.3/CSA B45.4.

Model UCS6808P-1 shown



	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	UCS6105P-1	17 3/4" (451 mm)	22 3/4" (346 mm)	16" (406 mm)	21" (533 mm)	5" (127 mm)	CB	18	\$ 784
•	UCS6805P-1	18 1/8" (460 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	5" (127 mm)	CB	18	\$ 776
	UCS6808P-1	18 1/8" (460 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	18	\$ 821

Double bowl undermount, 18 gauge



Double compartment undermount sink in 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finished. Undercoated to reduce condensation and resonance. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpieces. Template and installation instructions included.

Certified to ASME A112.19.3/CSA B45.4.

Model UCD6408P-1 shown




	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	UCD6405P-1	17 3/4" (451 mm)	30 7/8" (784 mm)	16" (406 mm)	14" (356 mm)	5" (127 mm)	CB	18	\$ 1,002
	UCD6408P-1	17 3/4" (451 mm)	30 7/8" (784 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	18	\$ 1,049




**Looking for more undermount sinks?
Franke Commercial no ledge topmount sinks
can also be undermounted**

Single bowl topmount drainboard, 18 gauge

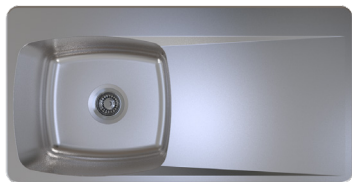

Model LBSDBR6810P-1 shown



Single compartment self rimming topmount sink with faucet ledge and drainboard. Drainboard slopes toward bowl. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finished. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Includes factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.

Faucet hole options (add to part number when ordering):

- 1 1 hole, centered
- 3 3 hole, 8" spread




	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
	LBSDL6408P-1	20 5/8" (524 mm)	36" (914 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1,3	\$ 3,455
	LBSDBR6408P-1	20 5/8" (524 mm)	36" (914 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1,3	\$ 3,455
	LBSDL6810P-1	20 9/16" (522 mm)	40" (1016 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	C	1,3	\$ 3,557
	LBSDBR6810P-1	20 9/16" (522 mm)	40" (1016 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	C	1,3	\$ 3,557

Double bowl topmount drainboard, 18 gauge



Model LBDDBR6408P-1 shown

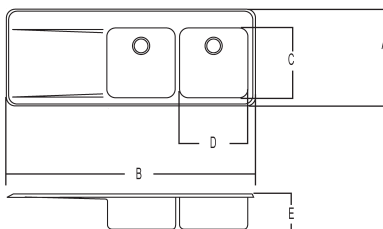

Double compartment self rimming topmount sink with faucet ledge and drainboard. Drainboard slopes toward bowl. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Includes waste assemblies, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.


Faucet hole options (add to part number when ordering):

- 1 1 hole, centered
- 3 3 hole, 8" spread



	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
	LBDDL6408P-1	20 1/2" (521 mm)	51" (1295 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1,3	\$ 4,423
	LBDDBR6408P-1	20 1/2" (521 mm)	51" (1295 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1,3	\$ 4,423

Art room sinks, topmount, no ledge, 18 gauge



Single compartment self rimming topmount sink in 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finished. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Certified to ASME A112.19.3/CSA B45.4.

Models ending in -1: 3 1/2" stainless steel crumb cup strainer assembly with 1 1/2" tailpiece included.

Model ART48-1 shown



	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
	ART36-1	19 1/8" (486 mm)	38 1/8" (969 mm)	17" (432 mm)	36" (914 mm)	8" (203 mm)	C	18	\$ 2,276
	ART48-1	19 1/8" (486 mm)	50 1/8" (1273 mm)	17" (432 mm)	48" (1219 mm)	8" (203 mm)	C	18	\$ 2,537
	ART60-1	19 1/8" (486 mm)	62 1/8" (1578 mm)	17" (432 mm)	60" (1524 mm)	8" (203 mm)	C	18	\$ 3,016

Classroom sinks, topmount, with right hand ledge, 18 gauge



Classroom sink with right ledge


ALRS4606P-1

Single compartment topmount sink with faucet ledge on right, 18 gauge (1.2mm), type 304 (CNS 18/10) stainless steel, #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions 16 1/8 x 20 13/16"

Inside bowl 14 x 16 x 6"

Waste location **Center back**

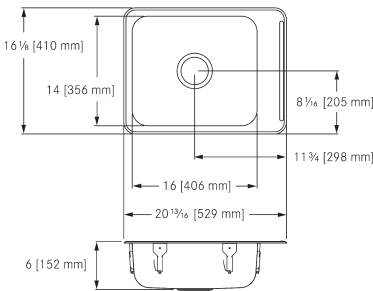


\$ 705

Classroom sinks, topmount, back and left ledges, 18 gauge



Model ALBLS4606P-1 shown




Single compartment self rimming topmount sink with faucet ledges at back and left in 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finished. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes a 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Certified to ASME A112.19.3/CSA B45.4.

	MODEL	Overall Dimensions		Sink Compartment Dimensions			LEDGE LOCATIONS	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	ALBLS4606P-1	16 1/8" (410 mm)	23 1/2" (597 mm)	14" (356 mm)	16" (406 mm)	6" (152 mm)	BACK AND LEFT	18	\$ 859
•	ALBLS7006P-1	21 13/16" (554 mm)	27 1/2" (699 mm)	17" (432 mm)	20" (508 mm)	6" (152 mm)	BACK AND LEFT	18	\$ 901

Classroom sinks, topmount, back and right ledges, 18 gauge




Model ALBRS4606P-1 shown



Single compartment self rimming topmount sink with faucet ledges at back and right in 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finished. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes a 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Certified to ASME A112.19.3/CSA B45.4.

	MODEL	Overall Dimensions		Sink Compartment Dimensions			LEDGE LOCATIONS	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	ALBRS4606P-1	16 1/8" (410 mm)	23 1/2" (597 mm)	14" (356 mm)	16" (406 mm)	6" (152 mm)	BACK AND RIGHT	18	\$ 859
•	ALBRS7006P-1	21 13/16" (554 mm)	27 1/2" (699 mm)	17" (432 mm)	20" (508 mm)	6" (152 mm)	BACK AND RIGHT	18	\$ 901

Classroom sinks, topmount, opposing ledges, 18 gauge



Single compartment topmount sink with faucet ledges on left and right, 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finished. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes a 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Certified to ASME A112.19.3/CSA B45.4.

Model ALHS6406P-1 shown












SEE BELOW FOR STANDARD FAUCET HOLE OPTIONS

	MODEL	Overall Dimensions		Sink Compartment Dimensions			LEDGE LOCATIONS	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	ALHS4606P-1	16 1/8" (410 mm)	23 1/2" (597 mm)	14" (356 mm)	16" (406 mm)	6" (152 mm)	LEFT AND RIGHT	18	\$ 705
	LHS4608P-1	16 1/8" (410 mm)	23 1/2" (597 mm)	14" (356 mm)	16" (406 mm)	8" (203 mm)	LEFT AND RIGHT	18	\$ 652
•	ALHS6406P-1	19 1/8" (486 mm)	30 1/2" (775 mm)	17" (432 mm)	23" (584 mm)	6" (152 mm)	LEFT AND RIGHT	18	\$ 801
•	ALHS7306P-1	21 13/16" (554 mm)	27 1/2" (699 mm)	17" (432 mm)	20" (508 mm)	6" (152 mm)	LEFT, BACK & RIGHT	18	\$ 977

Hole punch configurations for classroom sinks

ALRS Series


ALHS/LHS Series

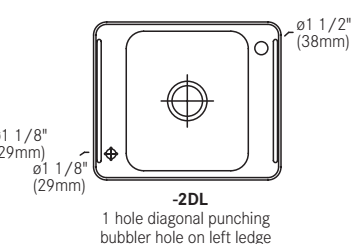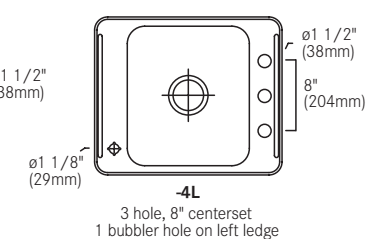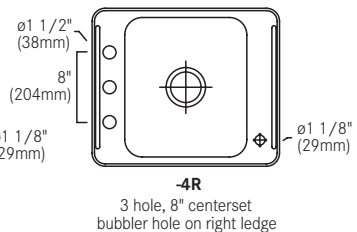

Type 316 Stainless Sinks



Single bowl topmount no faucet ledge type 316 stainless steel




Single compartment self rimming topmount sink without faucet ledge, 18 gauge (1.2 mm), type 316/316L stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes 3 1/2" (89 mm) type 316 crumb cup waste assembly. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Model S6808-316P-1 shown



	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
	S9407-316P-1	115/8" (295 mm)	16 5/8" (422 mm)	9 1/2" (241 mm)	14 1/2" (368 mm)	7" (178 mm)	C	18	\$ 715
	S6407-316P-1	18 1/8" (460 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	7" (178 mm)	CB	18	\$ 1,155
	S6808-316P-1	18 1/8" (460 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	18	\$ 1,156
	S6810-316P-1	18 1/8" (460 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	C	18	\$ 1,468

Single bowl topmount with faucet ledge type 316 stainless steel



Single compartment self rimming topmount sink with faucet ledge, 18 gauge (1.2 mm), type 316/316L stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes type 316 waste assembly. Certified to ASME A112.19.3-2008 / CSA B45.4-08

Faucet hole options (add to part number when ordering):

- 1 1 hole, centered
- 2 2 hole, 8" spread
- 3 3 hole, 8" spread, centered

Model LBS6808-316P-1 shown



	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
	LBS9407-316P-1	14 5/16" (364 mm)	16 5/8" (422 mm)	9 1/2" (241 mm)	14 1/2" (368 mm)	7" (178 mm)	C	1,2	\$ 815
	LBS4607-316P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	7" (178 mm)	C	1,3	\$ 1,048
	LBS4610-316P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	10" (254 mm)	C	1,2,3	\$ 1,273
	LBS6407-316P-1	20 9/16" (522 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	7" (178 mm)	CB	1,3	\$ 1,147
•	ALBS6805-316P-1	20 9/16" (522 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	5" (127 mm)	LB	1,3	\$ 711
	LBS6807-316P-1	20 9/16" (522 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	7" (178 mm)	CB	1,3	\$ 1,134
	LBS6808-316P-1	20 9/16" (522 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	1,3	\$ 1,234
	LBS6810-316P-1	20 9/16" (522 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	CB	1,3	\$ 1,357

Double bowl topmount type 316 stainless steel



Double bowl no faucet ledge, T316 D6410-316PCB-1


Gauge 18

Type 316/316L Stainless Steel

Outside dimensions 18 1/8 x 31 1/4"

Inside bowl 16 x 14 x 8"

Waste location **Center back**
3 1/2" (89 mm) type 316 waste
assemblies included

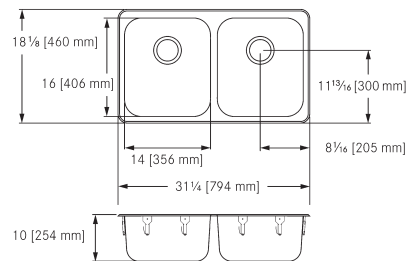

\$ 2,184



18ga



Double bowl with faucet ledge, T316 LBD6408-316P-1


Gauge 18

Type 316/316L Stainless Steel

Outside dimensions 20 1/2 x 31 1/4"

Inside bowl 16 x 14 x 8"

Waste location **Center back**
3 1/2" (89 mm) type 316 waste
assemblies included

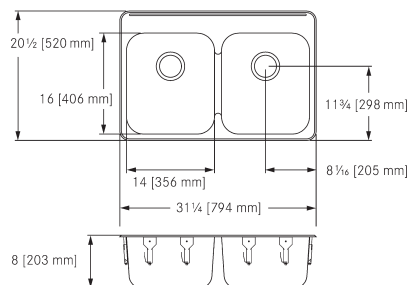

\$ 1,958



18ga



Double bowl with faucet ledge, T316 LBD6410-316PCB-1


Gauge 18

Type 316/316L Stainless Steel

Outside dimensions 20 13/16 x 31 1/4"

Inside bowl 16 x 14 x 10"

Waste location **Center back**
3 1/2" (89 mm) type 316 waste
assemblies included

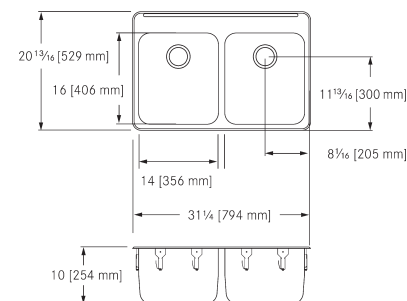

\$ 2,223



18ga




Undermount type 316 stainless steel




Single bowl undermount
UCS4608-316P-1
 Gauge **18**
Type 316/316L Stainless Steel
 Outside dimensions **16 1/8 x 18 1/8"**
 Inside bowl **14 x 16 x 8"**
 Waste location **Center**
 3 1/2" (89 mm) type 316 crumb cup
 waste assembly included

\$ 1,118

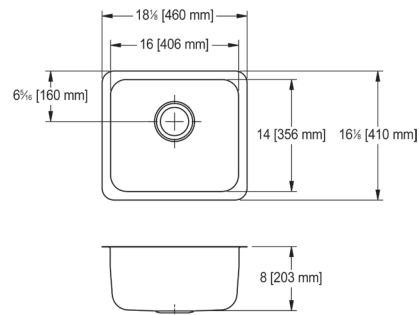


Single bowl undermount, T316
UCS4610-316P-1
 Gauge **18**
Type 316/316L Stainless Steel
 Outside dimensions **16 1/8 x 18 1/8"**
 Inside bowl **14 x 16 x 10"**
 Waste location **Center**
 3 1/2" (89 mm) type 316 crumb cup
 waste assembly included

\$ 1,400




Single bowl topmount drainboard, type 316

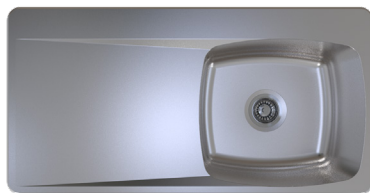


Drainboard left, T316
LBSDBL6810-316P-1
 Gauge **18**
Type 316/316L Stainless Steel
 Outside dimensions **20 9/16 x 40"**
 Inside bowl **16 x 18 x 10"**
 Waste location **Center**
 3 1/2" (89 mm) type 316 crumb cup
 waste assembly included

\$ 4,429

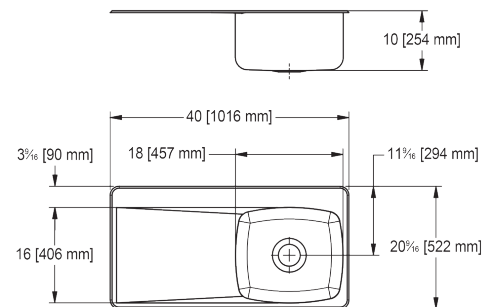

Drainboard right, T316
LBSDBR6810-316P-1
 Gauge **18**
Type 316/316L Stainless Steel
 Outside dimensions **20 9/16 x 40"**
 Inside bowl **16 x 18 x 10"**
 Waste location **Center**
 3 1/2" (89 mm) type 316 crumb cup
 waste assembly included


\$ 4,429

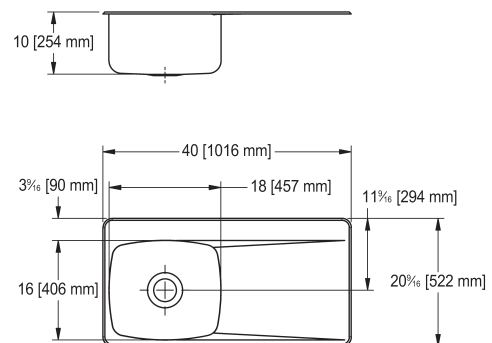

Art room sinks, topmount, no ledge, type 316



Model ART48-1 shown



Single compartment self rimming topmount sink, 18 gauge (1.2 mm), corrosion resistant type 316/316L stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes type 316 waste assembly. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Models ending in -1: 3 1/2" type 316 stainless steel crumb cup strainer assembly with 1 1/2" tailpiece included.


Models ending in -3C: 1 1/2" type 316 stainless steel duplex waste assembly with rubber stopper included.

	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
	ART36-316-1	19 1/8" (486 mm)	38 1/8" (969 mm)	17" (432 mm)	36" (914 mm)	8" (203 mm)	C	18	\$ 3,744
	ART36-316-3C	19 1/8" (486 mm)	38 1/8" (969 mm)	17" (432 mm)	36" (914 mm)	8" (203 mm)	C	18	\$ 3,744
	ART48-316-1	19 1/8" (486 mm)	50 1/8" (1273 mm)	17" (432 mm)	48" (1219 mm)	8" (203 mm)	C	18	\$ 4,114
	ART48-316-3C	19 1/8" (486 mm)	50 1/8" (1273 mm)	17" (432 mm)	48" (1219 mm)	8" (203 mm)	C	18	\$ 4,114
	ART60-316-1	19 1/8" (486 mm)	62 1/8" (1578 mm)	17" (432 mm)	60" (1524 mm)	8" (203 mm)	C	18	\$ 4,478
	ART60-316-3C	19 1/8" (486 mm)	62 1/8" (1578 mm)	17" (432 mm)	60" (1524 mm)	8" (203 mm)	C	18	\$ 4,478

Scullery sink, 16 gauge, type 316



Model SL2424-316-1 shown

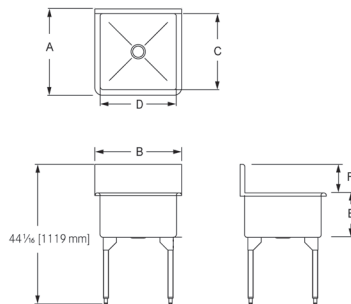

Single bowl scullery sink, 16 gauge (1.5 mm), corrosion resistant type 316/316L stainless steel, #4 satin finish. Sink compartment sloped to drain. Radius coved corners front and back only. Floor to rim height is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes waste assembly in type 316 stainless steel.

Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Models ending in -1: 3 1/2" type 316 stainless steel crumb cup strainer assembly with 1 1/2" tailpiece included.

Models ending in -5: 1 1/2" type 316 stainless steel duplex waste assembly with rubber stopper included, 1 1/2" (DN38) tailpiece, standpipe, and guard.

MODEL	Overall Dimensions		Sink Compartment Dimensions				WASTE LOCATION	GAUGE	PRICE
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH	F BACKSPASH			
SL2424-316-1	27 3/16" (691 mm)	27 3/16" (691 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	C	16	\$ 6,739
SL2424-316-5	27 3/16" (691 mm)	27 3/16" (691 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	RR	16	\$ 7,103
SL2448-316-1	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	48" (1219 mm)	14" (356 mm)	9" (229 mm)	C	16	\$ 10,199
SL2448-316-5	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	48" (1219 mm)	14" (356 mm)	9" (229 mm)	RR	16	\$ 11,111

Type 316 stainless steel sinks



Wall mount sink, 6" deep, T316 WHB1617-316-3

Gauge **18**

TYPE 316/316L Stainless Steel


Outside dimensions **16 1/2 x 17"**

Inside bowl **14 x 12 x 6"**

Waste fitting type 316, 1 1/2" duplex
waste assembly with rubber stopper
included

Waste location **Center back**

\$ 1,896

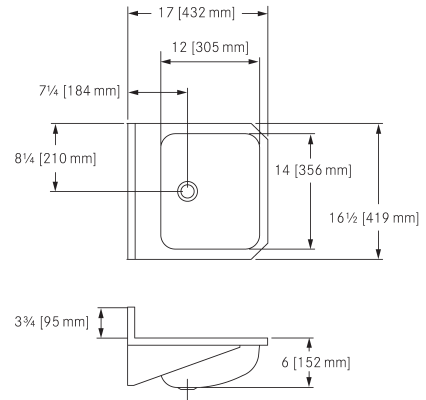

Wall mount sink, 7" deep, T316 WHB1819-316-3

Gauge **18**

TYPE 316/316L Stainless Steel


Outside dimensions **18 1/2 x 19"**

Inside bowl **16 x 14 x 7"**

Waste fitting type 316, 1 1/2" duplex
waste assembly with rubber stopper
included

Waste location **Center**

\$ 1,930

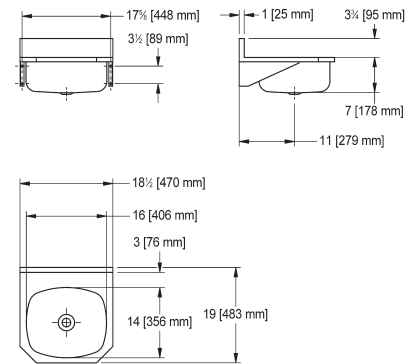

Cup sink, oval, T316 OC6-316

Gauge **20**

TYPE 316/316L Stainless Steel


Outside dimensions **7 1/2 x 4 1/2"**

Inside bowl **6 x 3 x 3 11/16"**

Waste fitting Integral type 316, 1 1/2"
duplex waste assembly included

Waste location **Center**

\$ 407



Cup sink, round, T316 RC6-316

Gauge **20**

TYPE 316/316L Stainless Steel


Outside dimensions **7 5/8 x 7 5/8"**

Inside bowl **6 x 6 x 4 1/2"**

Waste fitting Integral type 316, 1 1/2"
duplex waste assembly included

Waste location **Center**

\$ 412



Mop Sinks, type 316




Single wall installation, T316 FSS151509-316-1

Gauge 16

TYPE 316/316L Stainless Steel
Outside dimensions **17 1/2 x 17 1/2"**
Inside bowl **15 x 15 x 9 1/8"**

Waste fitting 2" IPS grid shower drain
included
Waste location **Center**

\$ 5,054

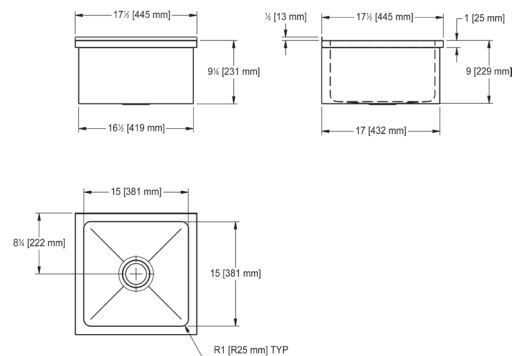



Corner installation, T316 FSS22210-316-1

Gauge 16

TYPE 316/316L Stainless Steel
Outside dimensions **24 x 24"**
Inside bowl **21 1/2 x 21 1/2 x 10"**

Waste fitting 2" IPS grid shower drain
included
Waste location **Center**

\$ 7,388

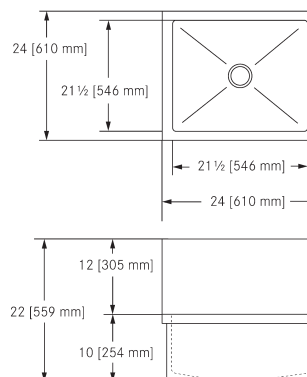




Corner installation, T316 FSSL223410-316-1

Gauge 16

TYPE 316/316L Stainless Steel
Side splash on left
Outside dimensions **24 x 36"**
Inside bowl **21 1/2 x 33 1/2 x 10"**

Waste fitting 2" IPS grid shower drain
included
Waste location **Center**

\$ 9,439





Corner installation, T316 FSSR223410-316-1

Gauge 16

TYPE 316/316L Stainless Steel
Side splash on right
Outside dimensions **24 x 36"**
Inside bowl **21 1/2 x 33 1/2 x 10"**

Waste fitting 2" IPS grid shower drain
included
Waste location **Center**

\$ 9,439



Mop Sinks, type 316






16ga



Corner installation, T316
FSS2210-316-1
 Gauge **16**
TYPE 316/316L Stainless Steel
 Outside dimensions **24 x 24"**
 Inside bowl **21 1/2 x 21 1/2 x 10"**
Waste fitting 2" IPS grid shower drain
 included
 Waste location **Center**

\$10,834






16ga



Corner installation, low front, T316
FSS02210-316-1
 Gauge **16**
TYPE 316/316L Stainless Steel
 Outside dimensions **24 x 24"**
 Inside bowl **21 1/2 x 21 1/2 x 6"**
Waste fitting 2" IPS grid shower drain
 included
 Waste location **Center**

\$10,834

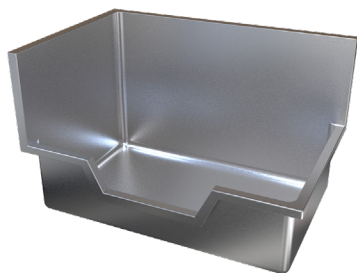




16ga



Low front, T316
FSSOL223410-316-1
 Gauge **16**
TYPE 316/316L Stainless Steel
 Side splash on left
 Outside dimensions **24 x 36"**
 Inside bowl **21 1/2 x 33 1/2 x 6"**
Waste fitting 2" IPS grid shower drain
 included
 Waste location **Center**

\$11,112

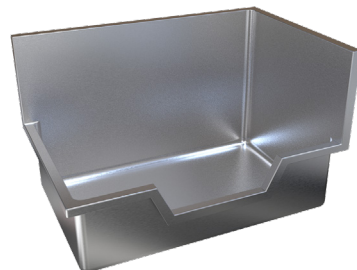



16ga



Low front, T316
FSSOR223410-316-1
 Gauge **16**
TYPE 316/316L Stainless Steel
 Side splash on right
 Outside dimensions **24 x 36"**
 Inside bowl **21 1/2 x 33 1/2 x 6"**
Waste fitting 2" IPS grid shower drain
 included
 Waste location **Center**

\$11,112



Pet wash stations



Pictured left to right: WTS60-1 trough sink, FSSOL223410-316-1 and FSSOR223410-316-1 mop sinks

Dog washing stations: a must in multifamily developments

Renters are living for their pets

Pet ownership in Canada increased throughout the pandemic and remains at very high levels. Over 60% of households own at least one dog or cat, and that includes apartment and condo dwellers.

Make space for pets in your floor plan

Most renters consider pet-friendly policies when choosing a place to live. A dog washing room on the main floor provides an accessible space for pet owners to clean off dirty paws or give their furbabies a full bath.

Options for dogs big and small

Floor-mounted sinks allow large dogs to step into without the need for lifting or guiding onto a ramp. A wall-mounted trough is perfect for smaller dogs to be placed for washing at a comfortable height. High backsplashes help keep the mess contained.




Utility & Scullery



27	Wall trough utility sinks
28	Sewage sampling
30	Scullery sinks, Classic
32	Scullery sinks, Service
35	Scullery sinks, Restaurant
38	Scullery sinks, World Class
41	Mop sinks

Wall trough utility sink, 16 gauge




Single compartment wall trough, 16 gauge (1.5 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Radius coved bowl corners, rolled radius rim. Center waste location. 3 1/2" (89 mm) waste fitting with crumb cup strainer included. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Model WTS36-1 shown



MODEL	Overall Dimensions		Sink Compartment Dimensions				GAUGE	PRICE
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH	F BACKSPLASH		
WTS36-1	18" (457 mm)	36" (914 mm)	14 3/4" (375 mm)	33 1/2" (851 mm)	8" (203 mm)	8" (203 mm)	16	\$ 5,103
WTS48-1	18" (457 mm)	48" (1219 mm)	14 3/4" (375 mm)	44 1/2" (1130 mm)	8" (203 mm)	8" (203 mm)	16	\$ 5,292
WTS60-1	18" (457 mm)	60" (1524 mm)	14 3/4" (375 mm)	56 1/2" (1435 mm)	8" (203 mm)	8" (203 mm)	16	\$ 5,613
WTS72-1	18" (457 mm)	72" (1829 mm)	14 3/4" (375 mm)	68 1/2" (1740 mm)	8" (203 mm)	8" (203 mm)	16	\$ 5,894

Wall trough utility sink, 14 gauge



Single compartment wall trough, 14 gauge (2.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Radius coved bowl corners, rolled radius rim. Center waste location. 3 1/2" (89 mm) waste fitting with crumb cup strainer included. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Model WTS2036-1 shown



MODEL	Overall Dimensions		Sink Compartment Dimensions				GAUGE	PRICE
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH	F BACKSPLASH		
WTS2025-1	20" (508 mm)	25" (635 mm)	16 1/2" (419 mm)	22" (559 mm)	10 1/2" (267 mm)	6" (152 mm)	14	\$ 4,428
WTS2031-1	20" (508 mm)	31" (787 mm)	16 1/2" (419 mm)	28" (711 mm)	10 1/2" (267 mm)	6" (152 mm)	14	\$ 4,649
WTS2036-1	20" (508 mm)	36" (914 mm)	16 1/2" (419 mm)	33" (838 mm)	8" (203 mm)	10" (254 mm)	14	\$ 5,719
WTS2048-1	20" (508 mm)	48" (1219 mm)	16 1/2" (419 mm)	45" (1143 mm)	8" (203 mm)	10" (254 mm)	14	\$ 5,935
WTS2060-1	20" (508 mm)	60" (1524 mm)	16 1/2" (419 mm)	57" (1448 mm)	8" (203 mm)	10" (254 mm)	14	\$ 6,295
WTS2072-1	20" (508 mm)	72" (1829 mm)	16 1/2" (419 mm)	69" (1753 mm)	8" (203 mm)	10" (254 mm)	14	\$ 6,604
WTS2096-1	20" (508 mm)	96" (2438 mm)	16 1/2" (419 mm)	93" (2362 mm)	8" (203 mm)	10" (254 mm)	14	\$ 7,151

Sewage sampling sinks



Sewage sampling sink, single bowl no drainboard SSS1827

Single compartment sewage sampling sink. 14 gauge (2.0 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners.



Anti-splash rim. Stainless steel $\frac{3}{4}$ " (19 mm) O.D. flushing tube with $\frac{1}{2}$ " (13 mm) NPS connection. 3" x 3" (76 x 76 mm) threaded waste outlet.

Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Please allow 6 weeks for delivery.

Inside bowl **14 x 18 x 15"**

\$17,236

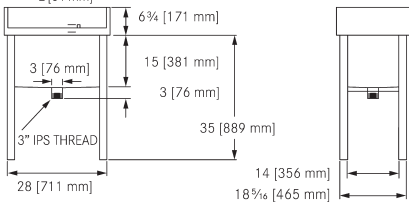

Sewage sampling sink, single bowl, left drainboard SSS1827SDSL

Single compartment sewage sampling sink left drainboard. 14 gauge (2.0 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners.

Anti-splash rim. Stainless steel $\frac{3}{4}$ " (19 mm) O.D. flushing tube with $\frac{1}{2}$ " (13 mm) NPS connection. 3 x 3" (76 x 76 mm) threaded waste outlet.


Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Please allow 6 weeks for delivery.

Left drainboard.

Inside bowl **14 x 18 x 15"**

\$18,522

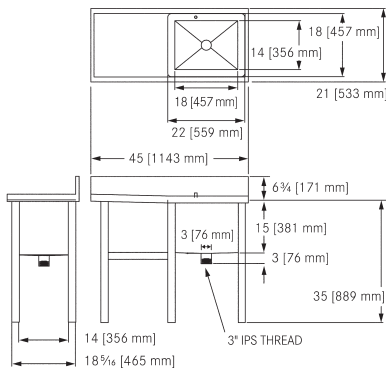

Sewage sampling sinks



Sewage sampling sink, single bowl, right drainboard SSS1827SDSR


Single compartment sewage sampling sink right drainboard. 14 gauge (2.0 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Anti-splash rim. Stainless steel $\frac{3}{4}$ " (19 mm) O.D. flushing tube with $\frac{1}{2}$ " (13 mm) NPS connection. 3" x 3" (76 x 76 mm) threaded waste outlet. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Please allow 6 weeks for delivery.

Right drainboard.

Inside bowl **14 x 18 x 15"**

\$ 18,522

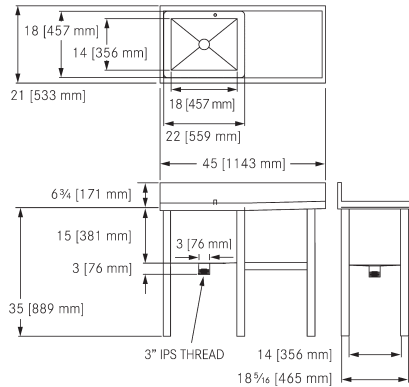

on
legs

14ga

cUPC®



Sewage sampling sink, left and right drainboards SSS1827DDS

Single compartment sewage sampling sink left and right drainboard. 14 gauge (2.0 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners.

Anti-splash rim. Stainless steel $\frac{3}{4}$ " (19 mm) O.D. flushing tube with $\frac{1}{2}$ " (13 mm) NPS connection. 3" x 3" (76 x 76 mm) threaded waste outlet.


Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Please allow 6 weeks for delivery.

Double drainboards.

Inside bowl **14 x 18 x 15"**

\$ 22,891

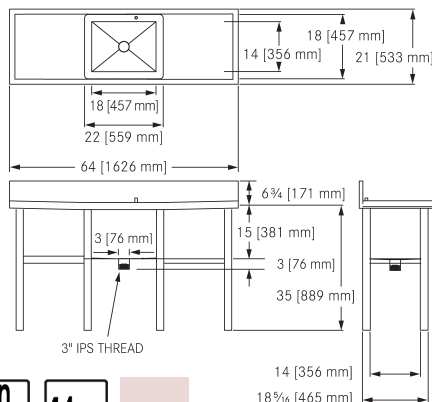

on
legs


14ga

cUPC®

Scullery sinks, Classic series



Model SL2424-1 shown



Single bowl scullery sink, 16 gauge (1.5 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartment sloped to drain, radius coved corners front and back only. Floor to rim height 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes waste assembly.

Standard faucet hole option: 2 hole, 1 1/4" (32 mm) diameter, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models.

Certified to ASME A112.19.3-2008 / CSA B45.4-08.


Models ending in -1: 3 1/2" crumb cup strainer assembly with 1 1/2" stainless steel tailpiece included.

Models ending in -5: 1 1/2" duplex waste assembly with rubber stopper, 1 1/2" (DN38) tailpiece, standpipe, and guard included.

MODEL	Overall Dimensions		Sink Compartment Dimensions				WASTE LOCATION	GAUGE	PRICE
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH	F BACKSPLASH			
SL2424-1	27 3/16" (691 mm)	27 3/16" (691 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	C	16	\$ 3,335
SL2424-5	27 3/16" (691 mm)	27 3/16" (691 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	RR	16	\$ 3,468
SL2448-1	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	48" (1219 mm)	14" (356 mm)	9" (229 mm)	C	16	\$ 4,565
SL2448-5	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	48" (1219 mm)	14" (356 mm)	9" (229 mm)	RR	16	\$ 4,732



Model DL2448-1 shown



Double bowl scullery sink, 16 gauge (1.5 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartment sloped to drain, radius coved corners front and back only. Floor to rim height 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes waste assemblies.

Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models.

Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Models ending in -1: 3 1/2" crumb cup strainer assembly with 1 1/2" stainless steel tailpiece included.


Models ending in -5: 1 1/2" duplex waste assembly with rubber stopper, 1 1/2" (DN38) tailpiece, standpipe, and guard included.

MODEL	Overall Dimensions		Sink Compartment Dimensions				WASTE LOCATION	GAUGE	PRICE
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH	F BACKSPLASH			
DL2448-1	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	C	16	\$ 5,576
DL2448-5	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	RR, LR	16	\$ 5,917

Scullery sinks, Classic series



Model TL2454-1 shown



Triple bowl bowl scullery sink, 16 gauge (1.5 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartment sloped to drain, radius coved corners front and back only. Floor to rim height 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes waste assemblies.

Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Certified to ASME A112.19.3-2008 / CSA B45.4-08

Models ending in -1: 3 1/2" *crumb cup strainer assembly with 1 1/2" stainless steel tailpiece included.*

Models ending in -5: 1 1/2" *duplex waste assembly with rubber stopper, 1 1/2" (DN38) tailpiece, standpipe, and guard included.*

MODEL	Overall Dimensions		Sink Compartment Dimensions				WASTE LOCATION	GAUGE	PRICE
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH	F BACKSPLASH			
TL2454-1	27 3/16" (691 mm)	57 3/8" (1457 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	C	16	\$ 6,530
TL2454-5	27 3/16" (691 mm)	57 3/8" (1457 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	RR, RR, LR	16	\$ 7,061
TL2472-1	27 3/16" (691 mm)	75 3/8" (1915 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	C	16	\$ 8,094
TL2472-5	27 3/16" (691 mm)	75 3/8" (1915 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	RR, RR, LR	16	\$ 8,586




Removable drainboard for Classic series scullery sinks CL-DB

Removable drainboard for Classic series scullery sinks. 16 gauge (1.5 mm) type 304 stainless steel. Polished to a satin finish. The legs have adjustable feet and are interchangeable such that the product can be installed on either the left or right of the scullery.

Outside dimensions **23 x 24 x 36"**

Install on **left or right**

\$ 1,431



Scullery sinks, Service series, single compartment



Model SSL2424-1 shown

Single bowl scullery sink with square bowl corners. 14 gauge (2.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartment sloped to center drain, radius coved corners front and back only. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece.


Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm).

Standard faucet hole option: 2 hole, 1 1/4" (32 mm) diameter, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Please allow 6 weeks for delivery, these models are built to order and non-returnable.

Certified to ASME A112.19.3-2008 / CSA B45.4-08.




Single compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions						
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE	PRICE
SSL2418-1	30 1/2" (775 mm)	22 1/4" (565 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 4,949
SSL2424-1	30 1/2" (775 mm)	28 1/4" (718 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 5,576

Single compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions						
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE	PRICE
SSL2418L-1	30 1/2" (775 mm)	40 1/4" (1022 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 6,198
SSL2418R-1	30 1/2" (775 mm)	40 1/4" (1022 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 6,198
SSL2424L-1	30 1/2" (775 mm)	52 1/4" (1327 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 6,820
SSL2424R-1	30 1/2" (775 mm)	52 1/4" (1327 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 6,820

Single compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions						
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE	PRICE
SSL2418LR-1	30 1/2" (775 mm)	58 1/4" (1480 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L & R	14	\$ 7,444
SSL2424LR-1	30 1/2" (775 mm)	76 1/4" (1937 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L & R	14	\$ 8,068

Scullery sinks, Service series, double compartment



Double bowl scullery sink with square bowl corners. 14 gauge (2.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartments sloped to center drain, radius coved corners front and back only. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece.

Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm).


Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models.

Please allow 6 weeks for delivery, these models are built to order and non-returnable. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Model SDL2448-1 shown




Double compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions						
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE	PRICE
SDL2436-1	30 1/2" (775 mm)	42 1/4" (1073 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 8,068
SDL2448-1	30 1/2" (775 mm)	54 1/4" (1378 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 8,689

Double compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions						
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE	PRICE
SDL2436L-1	30 1/2" (775 mm)	60 1/4" (1530 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 9,311
SDL2436R-1	30 1/2" (775 mm)	60 1/4" (1530 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 9,311
SDL2448L-1	30 1/2" (775 mm)	78 1/4" (1988 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 9,936
SDL2448R-1	30 1/2" (775 mm)	78 1/4" (1988 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 9,936

Double compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions						
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE	PRICE
SDL2436LR-1	30 1/2" (775 mm)	78 1/4" (1988 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L & R	14	\$ 10,556
SDL2448LR-1	30 1/2" (775 mm)	102 1/4" (2597 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L & R	14	\$ 11,182

Scullery sinks, Service series, triple compartment



Model STL2472-1 shown

Triple bowl scullery sink with square bowl corners. 14 gauge (2.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartments sloped to center drain, radius coved corners front and back only. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece.

Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm).

Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models.

Please allow 6 weeks for delivery, these models are built to order and non-returnable.

Certified to ASME A112.19.3-2008 / CSA B45.4-08.




Triple compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions						
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE	PRICE
STL2454-1	30 1/2" (775 mm)	60 1/4" (1530 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 9,936
STL2472-1	30 1/2" (775 mm)	78 1/4" (1988 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 13,048

Triple compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions						
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE	PRICE
STL2454L-1	30 1/2" (775 mm)	78 1/4" (1988 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 11,182
STL2454R-1	30 1/2" (775 mm)	78 1/4" (1988 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 11,182
STL2472L-1	30 1/2" (775 mm)	102 1/4" (2597 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 14,299
STL2472R-1	30 1/2" (775 mm)	102 1/4" (2597 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 14,299

Triple compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions						
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE	PRICE
STL2454LR-1	30 1/2" (775 mm)	96 1/4" (2445 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L & R	14	\$ 12,427
STL2472LR-1	30 1/2" (775 mm)	126 1/4" (3207 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L & R	14	\$ 15,541

Scullery sinks, Restaurant series, single compartment




Single bowl scullery sink with radius coved corners, constructed with hygiene and food safety in mind. 16 gauge (1.5 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartment sloped to center drain, radius coved corners that are easy to clean. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm).
Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Please allow 6 weeks for delivery, these models are built to order and non-returnable. Product compliance ASME A112.19.3/ CSA B45.4, NSF 2.

Model RSL2424-1 shown




Single compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions						
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE	PRICE
RSL2418-1	30 1/2" (775 mm)	22 1/4" (565 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	16	\$ 5,471
RSL2424-1	30 1/2" (775 mm)	28 1/4" (718 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	16	\$ 5,760

Single compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions						
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE	PRICE
RSL2418L-1	30 1/2" (775 mm)	40 1/4" (1022 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	16	\$ 6,760
RSL2418R-1	30 1/2" (775 mm)	40 1/4" (1022 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	16	\$ 6,760
RSL2424L-1	30 1/2" (775 mm)	52 1/4" (1327 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	16	\$ 7,048
RSL2424R-1	30 1/2" (775 mm)	52 1/4" (1327 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	16	\$ 7,048

Single compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions						
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE	PRICE
RSL2418LR-1	30 1/2" (775 mm)	58 1/4" (1480 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L & R	16	\$ 8,045
RSL2424LR-1	30 1/2" (775 mm)	76 1/4" (1937 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L & R	16	\$ 8,335

Scullery sinks, Restaurant series, double compartment




Double bowl scullery sink with radius coved corners, constructed with hygiene and food safety in mind. 16 gauge (1.5 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartments sloped to center drain, radius coved corners that are easy to clean. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm). Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Please allow 6 weeks for delivery, these models are built to order and non-returnable. Product compliance ASME A112.19.3/ CSA B45.4, NSF 2.

Model RDL2448-1 shown




Double compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions						
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE	PRICE
RDL2436-1	30 1/2" (775 mm)	44 1/4" (1121 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	16	\$ 8,335
RDL2448-1	30 1/2" (775 mm)	56 1/8" (1425 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	16	\$ 8,979

Double compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions						
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE	PRICE
RDL2436L-1	30 1/2" (775 mm)	62 1/8" (1578 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	16	\$ 9,623
RDL2436R-1	30 1/2" (775 mm)	62 1/8" (1578 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	16	\$ 9,623
RDL2448L-1	30 1/2" (775 mm)	80 1/8" (2035 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	16	\$ 10,266
RDL2448R-1	30 1/2" (775 mm)	80 1/8" (2035 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	16	\$ 10,266

Double compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions						
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE	PRICE
RDL2436LR-1	30 1/2" (775 mm)	80 1/8" (2035 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L & R	16	\$ 10,911
RDL2448LR-1	30 1/2" (775 mm)	104 1/8" (2645 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L & R	16	\$ 11,553

Scullery sinks, Restaurant series, triple compartment



Model RTL2472-1 shown

Triple bowl scullery sink with radius coved corners, constructed with hygiene and food safety in mind. 16 gauge (1.5 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartments sloped to center drain, radius coved corners that are easy to clean. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece.


Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm).

Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models.

Please allow 6 weeks for delivery, these models are built to order and non-returnable. Product compliance ASME A112.19.3/ CSA B45.4, NSF 2.




Triple compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions						
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE	PRICE
RTL2454-1	30 1/2" (775 mm)	64 1/8" (1629 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	16	\$ 12,842
RTL2472-1	30 1/2" (775 mm)	82 1/8" (2086 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	16	\$ 13,487

Triple compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions						
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE	PRICE
RTL2454L-1	30 1/2" (775 mm)	78 1/8" (1984 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	16	\$ 14,128
RTL2454R-1	30 1/2" (775 mm)	78 1/8" (1984 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	16	\$ 14,128
RTL2472L-1	30 1/2" (775 mm)	106 1/8" (2695 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	16	\$ 14,771
RTL2472R-1	30 1/2" (775 mm)	106 1/8" (2695 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	16	\$ 14,771

Triple compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions						
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE	PRICE
RTL2454LR-1	30 1/2" (775 mm)	92 1/8" (2340 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L & R	16	\$ 15,416
RTL2472LR-1	30 1/2" (775 mm)	130 1/8" (3305 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L & R	16	\$ 16,057

Scullery sinks, World Class series, single compartment




Single bowl scullery sink with radius coved bowl corners, constructed with hygiene and food safety in mind. 14 gauge (2.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartment sloped to center drain, radius coved corners that are easy to clean. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm). Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Please allow 6 weeks for delivery, these models are built to order and non-returnable. Product compliance ASME A112.19.3/ CSA B45.4, NSF 2.

Model WSL2424-1 shown




Single compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions						
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE	PRICE
WSL2418-1	30 1/2" (775 mm)	22 1/4" (565 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 6,342
WSL2424-1	30 1/2" (775 mm)	28 1/4" (718 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 7,053

Single compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions						
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE	PRICE
WSL2418L-1	30 1/2" (775 mm)	40 1/4" (1022 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 7,759
WSL2418R-1	30 1/2" (775 mm)	40 1/4" (1022 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 7,759
WSL2424L-1	30 1/2" (775 mm)	52 1/4" (1327 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 8,469
WSL2424R-1	30 1/2" (775 mm)	52 1/4" (1327 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 8,469

Single compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions						
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE	PRICE
WSL2418LR-1	30 1/2" (775 mm)	58 1/4" (1480 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L & R	14	\$ 9,178
WSL2424LR-1	30 1/2" (775 mm)	76 1/4" (1937 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L & R	14	\$ 9,885

Scullery sinks, World Class series, double compartment




Model WDL2448-1 shown




Double bowl scullery sink with radius coved bowl corners, constructed with hygiene and food safety in mind. 14 gauge (2.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartments sloped to center drain, radius coved corners that are easy to clean. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm).
Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Please allow 6 weeks for delivery, these models are built to order and non-returnable. Product compliance ASME A112.19.3/ CSA B45.4, NSF 2.

Double compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions						
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE	PRICE
WDL2436-1	30 1/2" (775 mm)	44 1/4" (1121 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 9,428
WDL2448-1	30 1/2" (775 mm)	56 1/8" (1425 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 10,105

Double compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions						
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE	PRICE
WDL2436L-1	30 1/2" (775 mm)	62 1/8" (1578 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 10,781
WDL2436R-1	30 1/2" (775 mm)	62 1/8" (1578 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 10,781
WDL2448L-1	30 1/2" (775 mm)	80 1/8" (2035 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 11,458
WDL2448R-1	30 1/2" (775 mm)	80 1/8" (2035 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 11,458

Double compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions						
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE	PRICE
WDL2436LR-1	30 1/2" (775 mm)	80 1/8" (2035 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L & R	14	\$ 12,135
WDL2448LR-1	30 1/2" (775 mm)	104 1/8" (2645 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L & R	14	\$ 12,811

Scullery sinks, World Class series, triple compartment




Model WDL2448-1 shown

Triple bowl scullery sink with radius coved bowl corners, constructed with hygiene and food safety in mind. 14 gauge (2.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartments sloped to center drain, radius coved corners that are easy to clean. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm). Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Please allow 6 weeks for delivery, these models are built to order and non-returnable. Product compliance ASME A112.19.3/ CSA B45.4, NSF 2.




Triple compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
WTL2454-1	30 1/2" (775 mm)	64 1/8" (1629 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 15,555
WTL2472-1	30 1/2" (775 mm)	82 1/8" (2086 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 16,266

Triple compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
WTL2454L-1	30 1/2" (775 mm)	78 1/8" (1984 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 16,975
WTL2454R-1	30 1/2" (775 mm)	78 1/8" (1984 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 16,975
WTL2472L-1	30 1/2" (775 mm)	106 1/8" (2695 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 17,682
WTL2472R-1	30 1/2" (775 mm)	106 1/8" (2695 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 17,682

Triple compartment with drainboard left and right




	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
WTL2454LR-1	30 1/2" (775 mm)	92 1/8" (2340 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L & R	14	\$ 18,392
WTL2472LR-1	30 1/2" (775 mm)	130 1/8" (3305 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L & R	14	\$ 19,101

Mop utility sinks



Mop sinks, boot wash stations in Type 316 stainless steel



Model FSSOR223410-316-1 shown

	Overall Dimensions		Sink Compartment Dimensions			FRONT EDGE STYLE	SPLASH LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH				
FSS151509-316-1	17 1/2" (445 mm)	17 1/2" (445 mm)	15" (381 mm)	15" (381 mm)	9 1/4" (231 mm)	Straight	-	16	\$ 5,054
FSS222210-316-1	24" (610 mm)	24" (610 mm)	21 1/2" (546 mm)	21 1/2" (546 mm)	10" (254 mm)	Straight	L&R	16	\$ 7,388
FSSL223410-316-1	24" (610 mm)	36" (914 mm)	21 1/2" (546 mm)	33 1/2" (851 mm)	10" (254 mm)	Straight	L	16	\$ 9,439
FSSR223410-316-1	24" (610 mm)	36" (914 mm)	21 1/2" (546 mm)	33 1/2" (851 mm)	10" (254 mm)	Square front	R	16	\$ 9,439
FSS2210-316-1	24" (610 mm)	24" (610 mm)	21 1/2" (546 mm)	21 1/2" (546 mm)	10" (254 mm)	Angular front	L&R	16	\$ 10,834
FSSO2210-316-1	24" (610 mm)	24" (610 mm)	21 1/2" (546 mm)	21 1/2" (546 mm)	10" (254 mm)	Drop front	L&R	16	\$ 10,834
FSSOL223410-316-1	24" (610 mm)	36" (914 mm)	21 1/2" (546 mm)	33 1/2" (851 mm)	10" (254 mm)	Drop front	L	16	\$ 11,112
FSSOR223410-316-1	24" (610 mm)	36" (914 mm)	21 1/2" (546 mm)	33 1/2" (851 mm)	10" (254 mm)	Drop front	R	16	\$ 11,112



Detailed specification information on MOP SINKS can be found on pages 23 & 24


Vanity Basins



Oval vanity basin topmount no faucet ledge



Model V1114-5 shown



Single compartment self rimming oval topmount vanity basin without faucet ledge. 18 gauge (1.2 mm), Type 304 (CNS 18/10) stainless steel with satin finish bowl, mirror finish rim. Center back waste location. Undercoated to reduce condensation and resonance. Factory applied rim seal. Includes cutout template and installation hardware.

Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Models that end in -5D or -6D include a 1 1/2" (38 mm) waste assembly with rubber stopper.


Models that end in -5 or -6 accept a 1 1/4" (32 mm) waste assembly, not included.

	MODEL	Overall Dimensions		Sink Compartment Dimensions			OVER-FLOW	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	V1114-5	10 7/8" (276 mm)	14 3/8" (365 mm)	8 1/8" (206 mm)	11 5/8" (295 mm)	5" (127 mm)	-	18	\$ 310
•	V1114-5D	10 7/8" (276 mm)	14 3/8" (365 mm)	8 1/8" (206 mm)	11 5/8" (295 mm)	5" (127 mm)	-	18	\$ 323
•	V1418-5	13 3/4" (349 mm)	18 1/4" (464 mm)	11" (279 mm)	15 1/2" (394 mm)	5" (127 mm)	-	18	\$ 381
•	V1418-6	13 3/4" (349 mm)	18 1/4" (464 mm)	11" (279 mm)	15 1/2" (394 mm)	6" (152 mm)	-	18	\$ 381
•	OV1418-6	13 3/4" (349 mm)	18 1/4" (464 mm)	11" (279 mm)	15 1/2" (394 mm)	6" (152 mm)	Front	18	\$ 448

Round vanity basin topmount no faucet ledge



Model OV17-5 shown




Single compartment self rimming round topmount vanity basin without faucet ledge. 18 gauge (1.2 mm), Type 304 (CNS 18/10) stainless steel with satin finish bowl, mirror finish rim. Center back waste location. Undercoated to reduce condensation and resonance. Factory applied rim seal. Includes cutout template and installation hardware.

Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Models that end in -5 or -6 accept a 1 1/4" (32 mm) waste assembly, not included.

	MODEL	Overall Dimensions		Sink Compartment Dimensions			OVER-FLOW	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	V17-5	16 3/4" (425 mm)	16 3/4" (425 mm)	14" (356 mm)	14" (356 mm)	5" (127 mm)	-	18	\$ 419
•	OV17-5	16 3/4" (425 mm)	16 3/4" (425 mm)	14" (356 mm)	14" (356 mm)	5" (127 mm)	Back	18	\$ 519
•	V17-6	16 3/4" (425 mm)	16 3/4" (425 mm)	14" (356 mm)	14" (356 mm)	5" (127 mm)	-	18	\$ 437
•	OV17-6	16 3/4" (425 mm)	16 3/4" (425 mm)	14" (356 mm)	14" (356 mm)	6" (152 mm)	Front	18	\$ 454

Vanity basin topmount with faucet ledge



With ledge, 5" deep, overflow
OV1619-5-1 1 hole, centered
OV1619-5-3 3 hole, 4" centerset

Gauge **18**

Outside dimensions **16 3/8 x 18 1/2"**

Inside bowl **11 x 15 3/16 x 5"**



Mirror finished rim, #4 satin finished bowl

Integral **overflow** at back of bowl

Accepts 1 1/4" (32 mm) overflow waste assembly,
not included

Waste location **Center back**

\$ 526

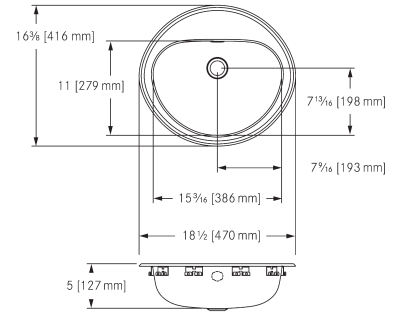

With ledge, 5" deep, no overflow
V1619-5-1 1 hole, centered
V1619-5-3 3 hole, 4" centerset

Gauge **18**

Outside dimensions **16 3/8 x 18 1/2"**



Inside bowl **11 x 15 3/16 x 5"**

Mirror finished rim, #4 satin finished bowl

Accepts 1 1/4" (32 mm) waste assembly, not
included

Waste location **Center back**

\$ 448

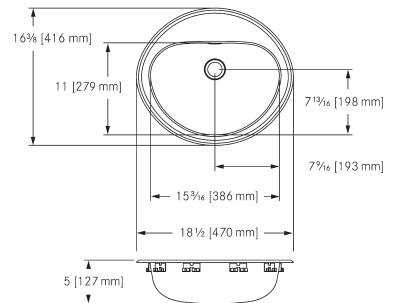

With ledge, 6" deep, overflow
OV1619-6-1 1 hole, centered
OV1619-6-3 3 hole, 4" centerset

Gauge **18**

Outside dimensions **16 3/8 x 18 1/2"**

Inside bowl **11 x 15 3/16 x 6"**


Mirror finished rim, #4 satin finished bowl

Integral **overflow** at back of bowl

Accepts 1 1/4" (32 mm) overflow waste assembly,
not included

Waste location **Center back**

\$ 483

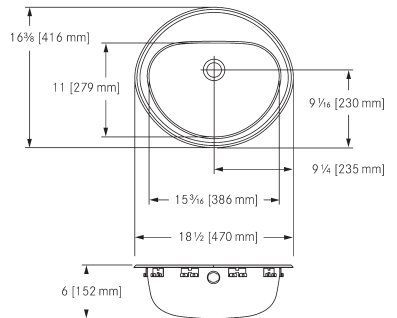

With ledge, 6" deep, no overflow
V1619-6-1 1 hole, centered
V1619-6-3 3 hole, 4" centerset

Gauge **18**

Outside dimensions **16 3/8 x 18 1/2"**


Inside bowl **11 x 15 3/16 x 6"**

Mirror finished rim, #4 satin finished bowl


Accepts 1 1/4" (32 mm) waste assembly, not
included

Waste location **Center back**

\$ 459


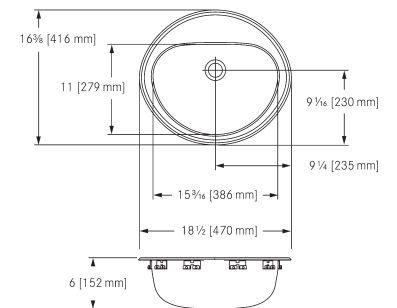


Vanity basin topmount with faucet ledge




With ledge, 5" deep, overflow
OV1821-5-1 1 hole, centered
OV1821-5-3 3 hole, 4" centerset
 Gauge 18
 Outside dimensions **18 x 21"**
 Inside bowl **11⁷/₁₆ x 18 x 5"**
 Mirror finished rim, #4 satin finished bowl
 Integral **overflow** at back of bowl
 Accepts 1¹/₄" (32 mm) overflow waste assembly,
 not included
 Waste location **Center back**

\$ 555

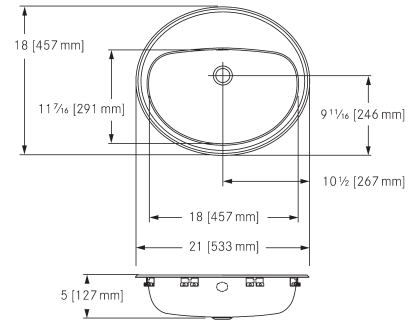


With ledge, 5" deep, no overflow
V1821-5-1 1 hole, centered
V1821-5-3 3 hole, 4" centerset
 Gauge 18
 Outside dimensions **18 x 21"**
 Inside bowl **11⁷/₁₆ x 18 x 5"**
 Mirror finished rim, #4 satin finished bowl
 Accepts 1¹/₄" (32 mm) waste assembly, not
 included
 Waste location **Center back**

\$ 479

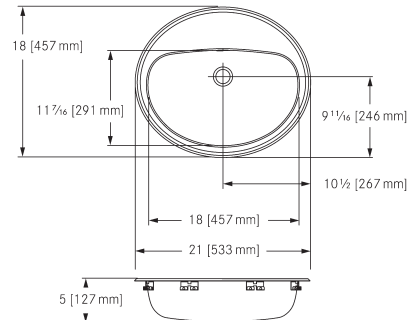


With ledge, 6" deep, overflow
OV1821-6-1 1 hole, centered
OV1821-6-3 3 hole, 4" centerset
 Gauge 18
 Outside dimensions **18 x 21"**
 Inside bowl **11⁷/₁₆ x 18 x 6"**
 Mirror finished rim, #4 satin finished bowl
 Integral **overflow** at back of bowl
 Accepts 1¹/₄" (32 mm) overflow waste assembly,
 not included
 Waste location **Center back**

\$ 499

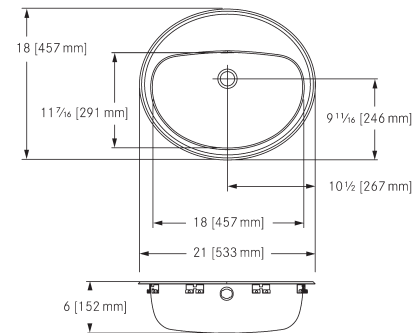

With ledge, 6" deep, no overflow
V1821-6-1 1 hole, centered
V1821-6-3 3 hole, 4" centerset
 Gauge 18
 Outside dimensions **18 x 21"**
 Inside bowl **11⁷/₁₆ x 18 x 6"**
 Mirror finished rim, #4 satin finished bowl
 Accepts 1¹/₄" (32 mm) waste assembly, not
 included
 Waste location **Center back**

\$ 477

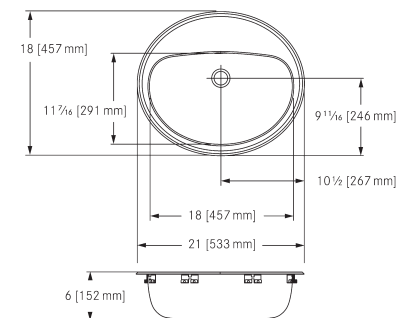

Vanity basin undermount



Undermount, rectangular, overflow OWB1119U-5

Gauge **18**

Outside dimensions **11 x 19"**

Inside bowl **9 x 17 x 4 1/2"**



#4 satin finished bowl

Integral **overflow** at front of bowl

Accepts 1 1/4" (32 mm) overflow waste
assembly, not included

Waste location **Center back**

\$ 552

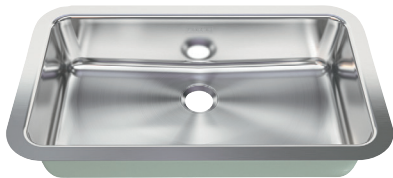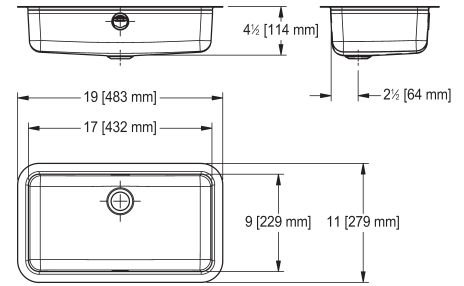

Undermount, rectangular, no overflow WB1119U-5

Gauge **18**

Outside dimensions **11 x 19"**


Inside bowl **9 x 17 x 4 1/2"**

#4 satin finished bowl

Accepts 1 1/4" (32 mm) waste assembly, not
included

Waste location **Center back**

\$ 506

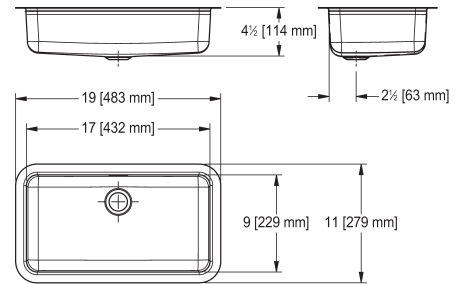

Undermount, U-shaped, overflow OWB1420U-5

Gauge **18**

Outside dimensions **14 x 20"**

Inside bowl **12 x 18 x 4 1/2"**


#4 satin finished bowl

Integral **overflow** at back of bowl

Accepts 1 1/4" (32 mm) overflow waste
assembly, not included

Waste location **Center back**

\$ 754

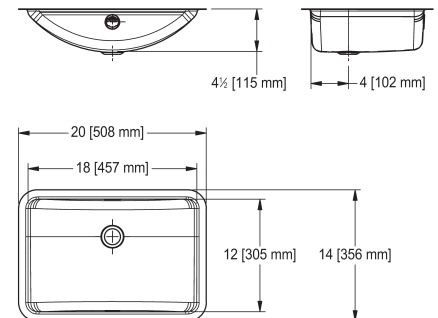

Undermount, U-shaped, no overflow WB1420U-5

Gauge **18**

Outside dimensions **14 x 20"**


Inside bowl **12 x 18 x 4 1/2"**

#4 satin finished bowl


Accepts 1 1/4" (32 mm) waste assembly,
not included

Waste location **Center back**

\$ 708

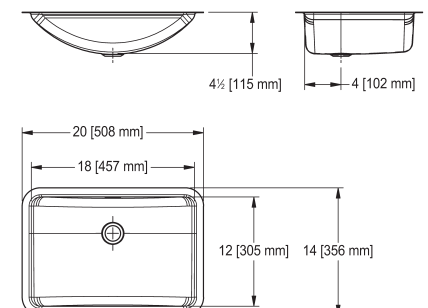

Vanity basin undermount



Undermount with overflow OV1317U-5

Gauge **18**

Outside dimensions **13 1/4 x 17 7/16"**

Inside bowl **10 15/16 x 15 3/16 x 5"**


#4 satin finished bowl

Integral **overflow** at back of bowl

Accepts 1 1/4" (32 mm) overflow waste
assembly, not included

Waste location **Center back**

\$ 639

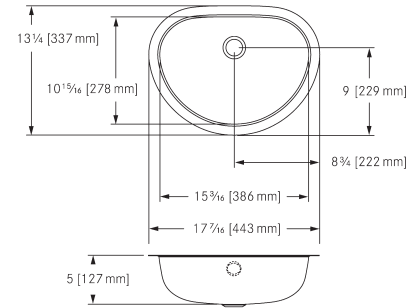

Undermount with overflow OV1420U-5

Gauge **18**

Outside dimensions **13 11/16 x 20 1/4"**

Inside bowl **11 7/16 x 18 x 5"**


#4 satin finished bowl

Integral **overflow** at back of bowl

Accepts 1 1/4" (32 mm) overflow waste
assembly, not included

Waste location **Center back**

\$ 703

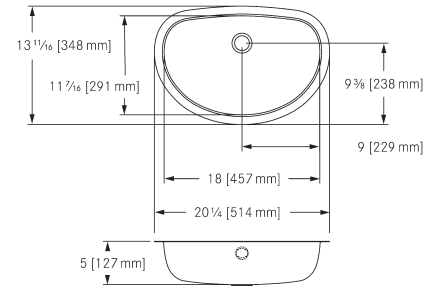

Semi-recessed topmount vanity basins



Semi-recessed, 6" deep with overflow OV18SR-6

Gauge **18**

Outside dimensions **17 15/16 x 17 15/16"**

Inside bowl **14 x 14 x 6"**

Mirror finished rim


#4 satin finished bowl

Integral **overflow** at back of bowl

Accepts 1 1/4" (32 mm) overflow waste
assembly, not included

Waste location **Center**

\$ 448



Semi-recessed, 7" deep with overflow OV18SR-7

Gauge **18**

Outside dimensions **17 15/16 x 17 15/16"**

Inside bowl **14 x 14 x 7"**

Mirror finished rim


#4 satin finished bowl

Integral **overflow** at back of bowl

Accepts 1 1/4" (32 mm) overflow waste
assembly, not included

Waste location **Center**

\$ 448





Healthcare



Pictured: HWSS2321W-00 Medi-flo sink

49	Medi-flo healthcare sink
50	Ozo-flo faucets
51	Medi-flo & Ozo-flo accessories
52	Nightingale hand hygiene sinks
55	Premium surgical scrub sinks
56	Classic surgical scrub sinks
57	Premium surgical scrub sinks bundles
58	Clinical wash basins
60	Dual mount healthcare sinks

Medi-flo hand hygiene sink with integrated spout

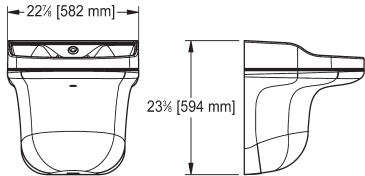

Patient room sink with integrated spout for infection control

HWSS2321W-00

Wall mount healthcare sink with laminar flow spout with integrated electrochemical water disinfection technology. White solid surface hand hygiene sink with removable shroud. Left rear 1 1/2" (DN 40) waste location to prevent water from splashing directly into the waste. An anti-splash feature runs through the center of the sink to greatly reduce splashing. Infrared controls trigger an illuminated laminar flow stream delivering water with dissolved ozone and other mixed oxidants on demand. Flow rate is 5.7 Lpm/1.5 gpm.

Recommended for areas with normal water conductivity above 75 TDS. If unaware of your local water conductivity, please contact customer service and this can easily be determined for you. Recommended water temperature is between 80-95°F (27-35°C). Hand hygiene sinks are specifically designed for hand washing only. They are not recommended as a drinking source, for washing utensils or for draining of medical bags or bedpans.

A plug-in transformer required for generation of mixed oxidants is included. Medi-flo is cUPC certified and is compliant with CSA B45.5-11/IAPMO Z124-2011 and IGC156-2012el. Meets and exceeds various national healthcare standards; ie, Z317/CSAZ8000. Wheelchair accessible: meets ADA, ANSI A117.1 and CSA B651-04. Patent Pending.

Optional: Pre-set thermostatic mixing valve **MEDI-MIX**.
Optional: In-wall carrier **IWC2104** for quicker installation.

\$ 5,313



Medi-flo splash reduction features

- Side splashes to prevent water from splashing out of the sink
- Laminar flow spout
- Infrared sensor turns water on when user places hands inside sink
- Center rib diverts water flow from faucet
- Integral waste, offset drain in rear left position


Efficacy of electrochemical water disinfection

Pathogen	Efficacy	Contact time	Source
Candida auris	99.9%	10 minutes	Cleveland VA Medical Center
C. difficile spores	64%	20 seconds	EMSL Canada Inc.
Klebsiella pneumoniae	99.99%	30 seconds	EMSL Canada Inc.
Legionella pneumophila	99.99%	5 minutes	EMSL Canada Inc.
MRSA	99.9%	10 minutes	Cleveland VA Medical Center
Pseudomonas	99.9%	10 minutes	Cleveland VA Medical Center

Time kill studies performed by 3rd party laboratories show that electrochemical water disinfection can be effective at reducing certain waterborne pathogens.

Laminar flow spout reduces splashing

Medi-flo delivers water in a laminar flow stream. Laminar flow occurs when water molecules move in an orderly, straight line for a turbulence-free stream.

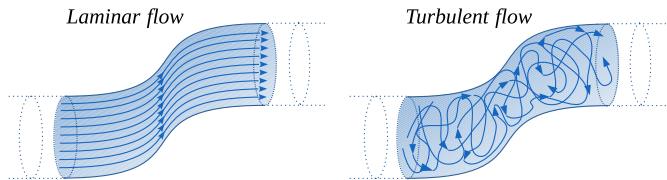

Ozo-flo laminar flow healthcare faucets

Ozo-flo hands-free clinical faucets are ideal for new or retrofit applications where hand wash sinks can benefit from added infection control. The addition of ozone and other mixed oxidants to the water will help keep the sink and waste free of biofilms and bacteria. Faucets are fabricated from Type 316 stainless steel and feature a blue illumination ring indicating activation of ozonation cycle. Control features include a post-wash cycle of 3 seconds to wash soap residue and bacteria down the drain. A daily purge cycle prevents water from stagnating in the drain lines for continuous waste disinfection.



Ozo-flo touch free faucet, wall mount HWF05

Front to back $7 \frac{5}{8}"$

Diameter $1 \frac{1}{2}"$

Hands free operation


Laminar flow 5.7 Lpm/1.5 gpm

Includes ozone generator unit with plug-in transformer.

Requires thermostatic mixing valve, not included.
Recommended: MEDI-MIX.

Certified to ASME A112.18.1/B125.1, UL1951, UL979 for ozone features, and CSA C22.2, Numbers 68 and 14.

\$ 4,193



Ozo-flo touch free faucet, deck mount, angled HWF23

Front to back $6 \frac{11}{16}"$

Height $5 \frac{13}{16}"$


Laminar flow 5.7 Lpm/1.5 gpm

Includes ozone generator unit with plug-in transformer.

Requires thermostatic mixing valve, not included.
Recommended: MEDI-MIX.

Certified to ASME A112.18.1/B125.1, UL1951, UL979 for ozone features, and CSA C22.2, Numbers 68 and 14.

\$ 4,238

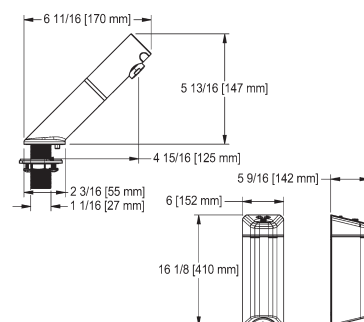

Ozo-flo touch free faucet, deck mount, high neck angled HWF43

Front to back $8 \frac{7}{8}"$

Height $10 \frac{3}{16}"$


Laminar flow 5.7 Lpm/1.5 gpm

Includes ozone generator unit with plug-in transformer.

Requires thermostatic mixing valve, not included.
Recommended: MEDI-MIX.

Certified to ASME A112.18.1/B125.1, UL1951, UL979 for ozone features, and CSA C22.2, Numbers 68 and 14.

\$ 4,469



Accessories for Medi-flo & Ozo-flo



Mixing valve

MEDI-MIX

Optional thermostatic mixing valve pre-programmed for Medi-flo HWSS2321W-00 sink and Ozo-flo faucets HWF05, HWF23, and HWF43. Adjustable outlet temperature range: 95 – 118°F (35 – 48°C). Factory set temperature 95°F (40°C).

\$ 386



Replacement shroud for Medi-flo

MEDI-SHR

Removable replacement shroud for HWSS2321W-00. White polymer composite material.

\$ 978




In-wall carrier for Medi-flo

IWC2104

Floor mounted in-wall carrier designed for Medi-flo (HWSS2321W-00) sink. Preset stud locations simplify installation. Steel uprights with welded feet. Integrated rough in box. Hardware included.




\$ 498

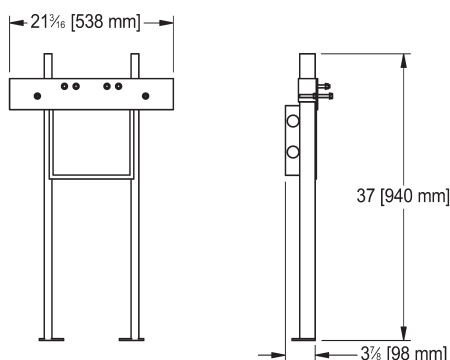

Nightingale Sinks



Pictured: AHWSS1720W-G Nightingale sink with faucet



Hand hygiene sink AHWSS1720W-00

White solid surface hand hygiene sink with removable shroud. Sink is made of non-porous cast material with antimicrobial resin. An anti-splash feature runs through the center of the sink to greatly reduce splashing. Bowl is sloped towards drain and the sink rim is shaped to prevent users from placing objects on it. Hand hygiene sinks are specifically designed for hand washing only. Accepts single hole faucets with lower mounting hardware less than 2 1/2" (63 mm) in diameter.

Left rear 1 1/2" (DN 40) waste location, supplied with waste assembly. Sink is cUPC certified and compliant with CSA B45.5-11/IAPMO Z124-2011. Meets and exceeds various national healthcare standards; ie, CSAZ8000, CSAZ317.1-16. Wheelchair accessible: meets ADA, ANSI A117.1 and CSA B651-04 (check local codes to ensure compliance).

Outside dimensions **16 15/16 x 20 1/8 x 21 1/2"**

Inside bowl **15 1/4 x 18 5/8 x 9"**

Waste location **Left Rear**

\$ 2,255

Optional Accessories


IWC2203

In-wall carrier

See details on p. 59



Nightingale hand hygiene sinks

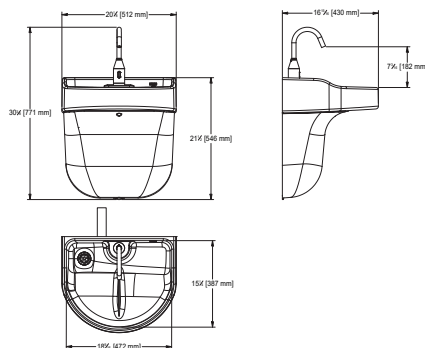

Hand hygiene sink with hands-free gooseneck faucet AHWSS1720W-G

White solid surface hand hygiene sink with removable shroud. Sink is made of non-porous cast material with antimicrobial resin. An anti-splash feature runs through the center of the sink to greatly reduce splashing. Bowl is sloped towards drain and the sink rim is shaped to prevent users from placing objects on it. Hand hygiene sinks are specifically designed for hand washing only.

Left rear 1 1/2" (DN 40) waste location, supplied with waste assembly.

Hands free gooseneck **faucet** included. Faucet can be powered with included plug in transformer or with included battery pack which will last approximately 100,000 cycles on 4 x AA batteries (AC or DC or AC with battery backup). Flow rate 6 Lpm (1.5gpm) laminar flow.

Faucet is certified to ASME A112.18.1/CSA B125.1.

Sink is cUPC certified and compliant with CSA B45.5-11/IAPMO Z124-2011. Meets and exceeds various national healthcare standards; ie, CSAZ8000, CSAZ317.1-16. Wheelchair accessible: meets ADA, ANSI A117.1 and CSA B651-04 (check local codes to ensure compliance).

Outside dimensions **16 15/16 x 20 1/8 x 30 3/8"**

Inside bowl **15 1/4 x 18 5/8 x 9"**

Waste location **Left Rear**


\$ 2,475

Optional Accessories

IWC2203

In-wall carrier

See details on p. 59

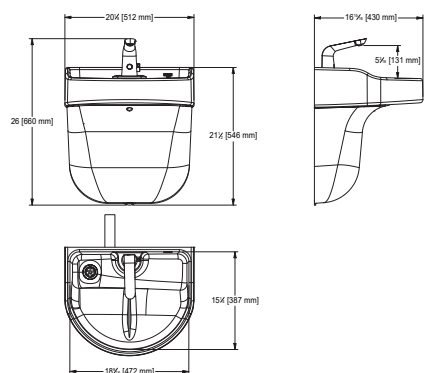

Hand hygiene sink with hands-free faucet AHWSS1720W-T

White solid surface hand hygiene sink with removable shroud. Sink is made of non-porous cast material with antimicrobial resin. Hand hygiene sinks are specifically designed for hand washing only. An anti-splash feature runs through the center of the sink to greatly reduce splashing. Bowl is sloped towards drain and the sink rim is shaped to prevent users from placing objects on it.

Left rear 1 1/2" (DN 40) waste location, supplied with waste assembly.

Hands free **faucet** included with user temperature control. Faucet can be powered with included plug in transformer or with included battery pack which will last approximately 100,000 cycles on 4 x AA batteries (AC or DC or AC with battery backup). Flow rate 5.7 Lpm (1.5 gpm).

Faucet is certified to ASME A112.18.1/CSA B125.1.

Sink is cUPC certified and compliant with CSA B45.5-11/IAPMO Z124-2011. Meets and exceeds various national healthcare standards; ie, CSAZ8000, CSAZ317.1-16. Wheelchair accessible: meets ADA, ANSI A117.1 and CSA B651-04 (check local codes to ensure compliance).

Outside dimensions **16 15/16 x 20 1/8 x 26"**

Inside bowl **15 1/4 x 18 5/8 x 9"**

Waste location **Left Rear**

\$ 2,541

Optional Accessories


IWC2203

In-wall carrier

See details on p. 59



Nightingale hand hygiene sinks

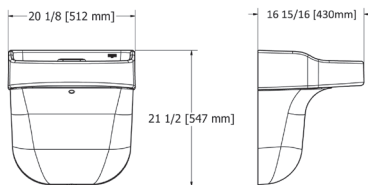

Hand hygiene sink with integrated faucet spout AHWSS1720WIS-00

White solid surface hand hygiene sink with integrated laminar flow water controls and removable shroud.

An anti-splash feature runs through the center of the sink to greatly reduce splashing. Bowl is sloped towards drain and sink rim is shaped to prevent users from placing objects on it. Hand hygiene sinks are specifically designed for hand washing only.

Left rear 1 1/2" (DN 40) waste location, supplied with waste assembly.

Laminar **spout** can be powered with included plug in transformer or with included battery pack which will last approximately 100,000 cycles on 4 x AA batteries.

Flow rate 6 Lpm / 1.5 gpm.

Faucet is certified to ASME A112.18.1/CSA B125.1.

Nightingale sinks are cUPC certified and are compliant with CSA B45.5-11/IAPMO Z124-2011. Wheelchair accessible: meets ADA, ANSI A117.1 and CSA B651-04 (check local codes to ensure compliance).

Outside dimensions **16 15/16" x 20 1/8" x 21 1/2"**

Inside bowl **15 1/4" x 18 5/8" x 9"**

Waste location **Left Rear**

\$2,620




Optional Accessories

IWC2203

In-wall carrier

See details on p. 59

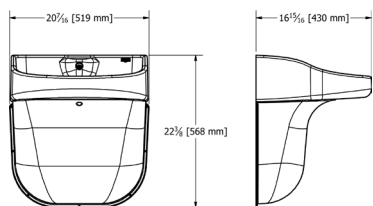

Hand hygiene sink with integrated faucet spout and antiligature shroud AHWSS1720WIS-AL

White solid surface hand hygiene sink with integrated laminar flow water controls and shroud. An anti-splash feature runs through the centre of the sink to greatly reduce splashing. Bowl is sloped towards drain and the sink rim is shaped to prevent users from placing objects on it. Hand hygiene sinks are specifically designed for hand washing only.

Anti-ligature shroud.

Left rear 1 1/2" (DN 40) waste location, supplied with waste assembly.

Laminar **spout** can be powered with included plug in transformer or with included battery pack which will last approximately 100,000 cycles on 4 x AA batteries.

Flow rate 6 Lpm / 1.5 gpm.

Faucet is certified to ASME A112.18.1/CSA B125.1.

cUPC certified, compliant with CSA B45.5-11/IAPMO Z124-2011. Wheelchair accessible: meets ADA, ANSI A117.1 and CSA B651-04 (check local codes to ensure compliance).

Outside dimensions **16 15/16" x 20 1/8" x 22 3/8"**

Inside bowl **15 1/4" x 18 5/8" x 9"**

Waste location **Left Rear**

\$2,849



Optional Accessories

IWC2203

In-wall carrier

See details on p. 59



Premium surgical scrub units



Premium surgical scrub sink, 16" wide SSU1-2016-3

16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Radius coved bowl corners. Access panel for service and maintenance. Integral 1 1/2" (38 mm) waste with threaded tailpiece for use with McGuire 155WC tailpiece.


Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **19 3/4 x 16 x 28"**

Inside bowl **15 x 13 x 10"**

Waste location **Center**

\$ 11,647

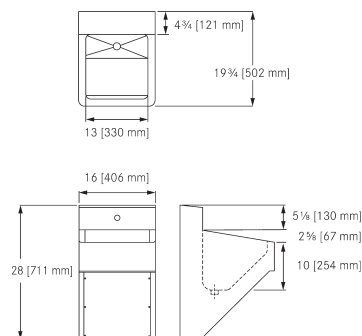

Premium surgical scrub sink, 20" wide SSU1-2020-3

16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Radius coved bowl corners. Access panel for service and maintenance. Integral 1 1/2" (38 mm) waste with threaded tailpiece for use with McGuire 155WC tailpiece.



Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **19 3/4 x 20 x 28"**

Inside bowl **15 x 17 x 10"**

Waste location **Center**

\$ 11,980

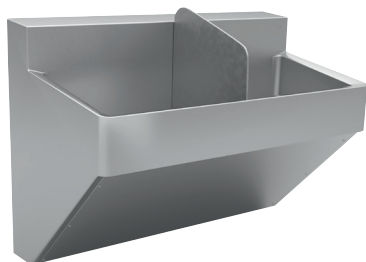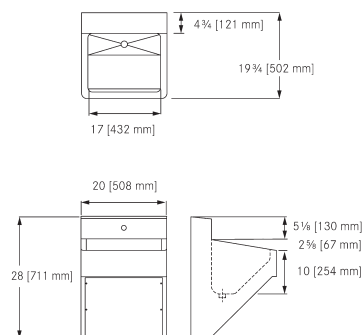

Premium surgical scrub sink, 40" wide SSU2-2040-3

16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Radius coved bowl corners. Divider is removable for thorough cleaning. Access panel for service and maintenance. Integral 1 1/2" (38 mm) waste with threaded tailpiece for use with McGuire 155WC tailpiece.


Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **19 3/4 x 40 x 28"**

Inside bowl **15 x 18 7/16 x 10"**

Waste location **Center**

\$ 16,307

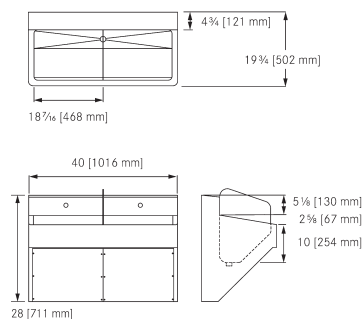


Classic surgical scrub sinks



Classic scrub sink, single SSU1-00

Single compartment surgical scrub station. 16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Bowl slopes from 10" to 12" from right to left. Access panel for service and maintenance. Franke hygienic 1 1/2" (38 mm) offset waste with integral tailpiece (no separate waste fitting required). Supplied with wall hanger brackets. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **23 x 30 x 26"** Inside bowl **17 1/2 x 27 x 12"** Waste location **Left Back**

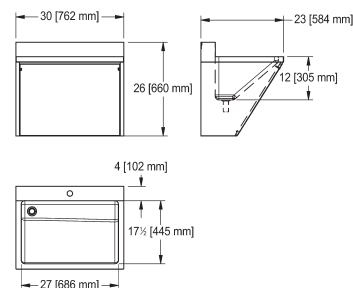


\$ 9,374



Classic scrub sink, double SSU2-00

Double compartment surgical scrub station. 16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Bowl slopes from 12" to 14" from right to left. Removable divider with no tracks in bowl. Access panel for service and maintenance. Franke hygienic 1 1/2" (38 mm) offset wastes with integral tailpieces (no separate waste fittings required). Supplied with wall hanger brackets. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **23 x 60 x 26"** Inside bowl **17 1/2 x 57 x 14"** Waste locations **Left and Center**

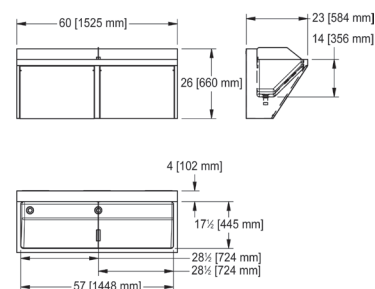


\$ 13,548



Classic scrub sink, triple SSU3-00

Triple compartment surgical scrub station. 16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Bowl slopes from 10" to 14" from right to left. Removable dividers with no tracks in bowl. Access panel for service and maintenance. Franke hygienic 1 1/2" (38 mm) offset wastes with integral tailpieces (no separate waste fittings required). Supplied with wall hanger brackets. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **23 x 90 x 26"** Inside bowl **17 1/2 x 87 x 14"** Waste location **Left, Center and Center**

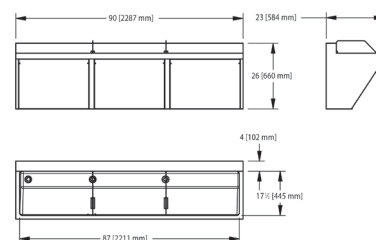

\$ 19,348

Classic surgical scrub sink bundles with valves and hands-free faucets



Classic scrub sink bundle, single SSU1-10

Single compartment surgical scrub station. 16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Bowl slopes from 10" to 12" from right to left. Access panel for service and maintenance.

Franke hygienic 1 1/2" (38 mm) offset waste with integral tailpiece (no separate waste fitting required). Supplied with wall hanger brackets.

Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **23 x 30 x 26"**


Inside bowl **17 1/2 x 27 x 12"**

Waste location **Left Back**

Sink bundle includes:

1 - **MIX-LF** thermostatic mixing valve

1 - **HHF180-6L** gooseneck hands-free faucet

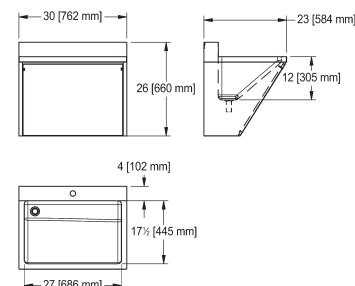

\$ 10,256



Classic scrub sink bundle, double SSU2-10

Double compartment surgical scrub station. 16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners.

Bowl slopes from 12" to 14" from right to left. Removable divider with no tracks in bowl. Access panel for service and maintenance.

Franke hygienic 1 1/2" (38 mm) offset wastes with integral tailpieces (no separate waste fittings required). Supplied with wall hanger brackets.

Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **23 x 60 x 26"**


Inside bowl **17 1/2 x 57 x 14"**

Waste locations **Left and Center**

Sink bundle includes:

2 - **MIX-LF** thermostatic mixing valves

2 - **HHF180-6L** gooseneck hands-free faucets

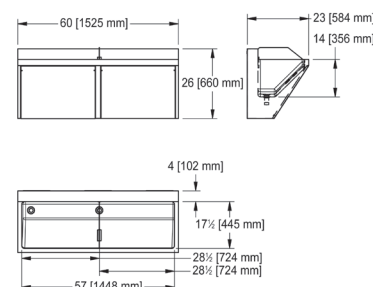

\$ 15,835



Classic scrub sink bundle, triple SSU3-10

Triple compartment surgical scrub station. 16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners.

Bowl slopes from 10" to 14" from right to left. Removable dividers with no tracks in bowl. Access panel for service and maintenance.

Franke hygienic 1 1/2" (38 mm) offset wastes with integral tailpieces (no separate waste fittings required). Supplied with wall hanger brackets.

Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **23 x 90 x 26"**


Inside bowl **17 1/2 x 87 x 14"**

Waste location **Left, Center and Center**

Sink bundle includes:

3 - **MIX-LF** thermostatic mixing valves

3 - **HHF180-6L** gooseneck hands-free faucets

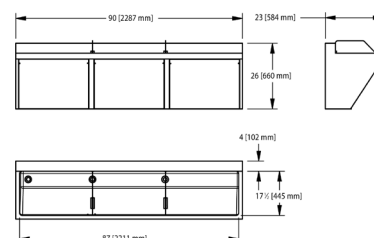

\$ 22,879

Clinical Wash Basins



Clinical wash basin, for splash mount faucet HWSS1518P-00

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Constructed with an integral shroud. High back and side walls contain splashing and protect adjacent surfaces from contamination.

Integral 1 1/2" (38 mm) waste welded to bottom of the sink bowl. Waste is left open and shaped to prevent the insertion of plugs or strainers to comply with national healthcare guidelines.

This fixture has antimicrobial nanocoating product protection on all exposed surfaces of the sink.

Recommended splash mount faucet **HHF180-6L-W**.

Certified to ASME A112.19.3/CSA B45.4.


Z8000 compliant.

Outside dimensions **18 x 15 x 28 5/8"**

Inside bowl **14 x 14 x 10"**

Waste location **Right Back**

\$ 2,750

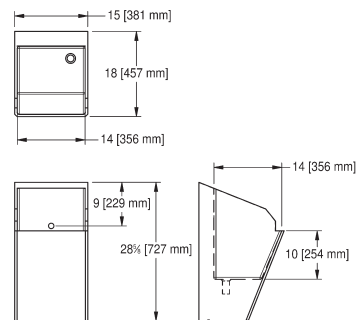

Clinical wash basin, dual mount faucet options HWS1414P-00

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Constructed with an integral shroud. High back and side walls contain splashing and protect adjacent surfaces from contamination.

Integral 1 1/2" (38 mm) waste welded to bottom of the sink bowl. Waste is left open and shaped to prevent the insertion of plugs or strainers to comply with national healthcare guidelines.

This fixture is coated with antimicrobial product protection on all exposed surfaces of the sink.

Recommended deck mount faucet **HHF180-6L**.

Certified to ASME A112.19.3/CSA B45.4.


Z8000 compliant.

Outside dimensions **18 3/4 x 15 x 18 1/2"**

Inside bowl **14 x 14 x 10"**

Waste locations **Left Back**

\$ 2,917

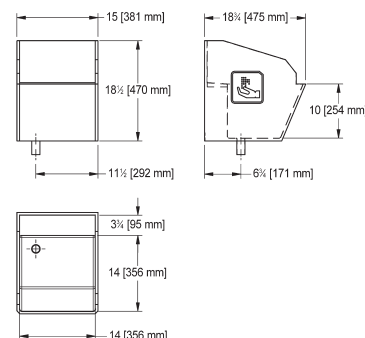


Shroud for HWS1414P-00 & HWSS1518P-00 HWS-RS-00

Stainless steel removable shroud for HWS1414P-00 and HWSS1518P-00 clinical wash basins.

Overall dimensions **13 1/2 x 14 1/2 x 10"**

\$ 505



Clinical Wash Basins



Clinical wash basin, large backsplash HWS1420P-00

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Offset waste with open access to allow for easy cleaning of P-Trap. Integral 1 1/2" (38 mm) waste welded to bottom of the sink bowl.


This fixture is coated with antimicrobial product protection on all exposed surfaces of the sink. Recommended deck mount faucet **HHF180-6L**. Certified to ASME A112.19.3/CSA B45.4. Z8000 compliant.

Outside dimensions **19 3/16 x 21 x 37 15/16"**

Inside bowl **14 x 20 x 10"**

Waste location **Left Back**

\$ 4,611

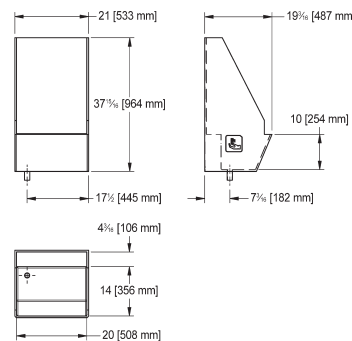

Clinical wash basin, wheelchair accessible AWHB1414P-3

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Offset waste with open access to allow for easy cleaning of P-Trap. Integral 1 1/2" (38 mm) waste welded to bottom of the sink bowl.

Wheelchair accessible: meets ADA, ANSI A117.1.

Certified to ASME A112.19.3/CSA B45.4.


Z8000 compliant.

Outside dimensions **17 9/16 x 14 5/16 x 15 1/16"**

Inside bowl **14 3/8 x 14 x 9 1/16"**

Waste location **Left Back**

\$ 7,847

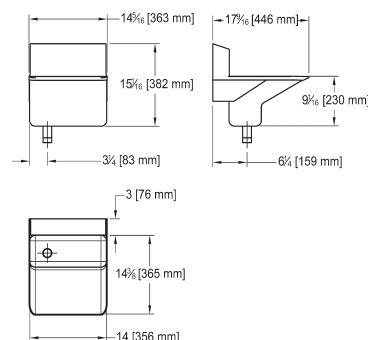


In-wall carrier for wall hung basins IWC2203

Universal floor mounted in-wall carrier designed for wall hung basins and water coolers. Steel uprights with welded feet.


Includes lower bracket for added support. Mounting hardware included.

Outside dimensions **7 7/16 x 23 7/8 x 42"**

\$ 472

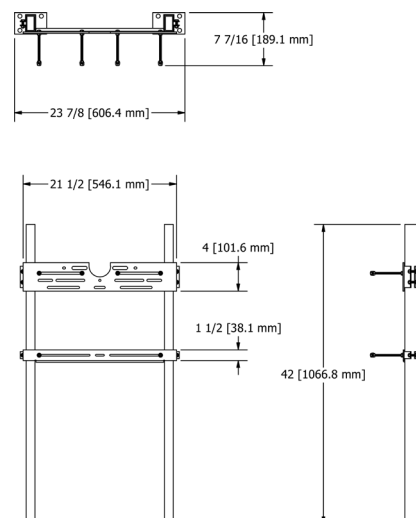

Dual mount medical hand wash sinks

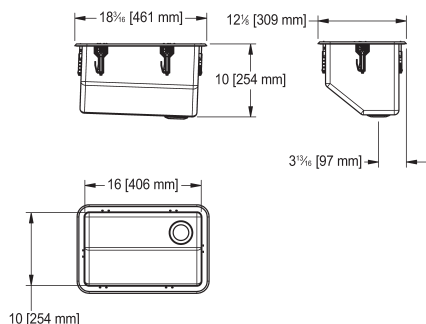


Topmount or undermount single bowl medical hand wash sink HWS0610P-3

Single compartment self rimming topmount (or undermount) medical hand wash sink with faucet ledge. 18 gauge (1.2 mm), type 304 stainless steel. Sink compartment is angled to reduce splashing and waste is offset to reduce the risk of any bacteria contamination and splashing. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, sound deadening pads, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.

Right rear waste location. Includes 1 1/2" (38 mm) duplex waste assembly and 1 1/2" (DN38) tailpiece.

Custom, non-returnable
Outside dimensions **12 1/8 x 18 3/16"**
Inside bowl **10 x 16 x 10"**
Waste location **Right rear**

\$ 956

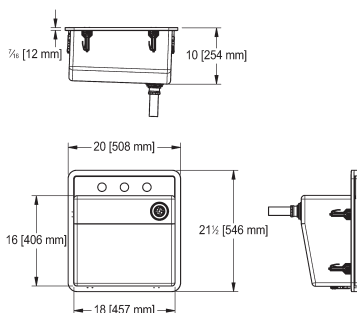

Topmount or undermount single bowl medical hand wash sink with faucet ledge HWS6810P-3

Single compartment self rimming topmount (or undermount) medical hand wash sink with faucet ledge. 18 gauge (1.2 mm), type 304 stainless steel. Sink compartment is angled to reduce splashing and waste is offset to reduce the risk of any bacteria contamination and splashing. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, sound deadening pads, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.

Right rear waste location. Includes 1 1/2" (38 mm) duplex waste assembly and 1 1/2" (DN38) tailpiece.

Custom, non-returnable.
Outside dimensions **21 1/2 x 20"**
Inside bowl **16 x 18 x 10"**
Waste location **Right rear**


\$ 1,283

Hand Wash Basins



Pictured: AWHBS2419-7 basins with HHF23T faucets

Designer, semi-public hand wash basins

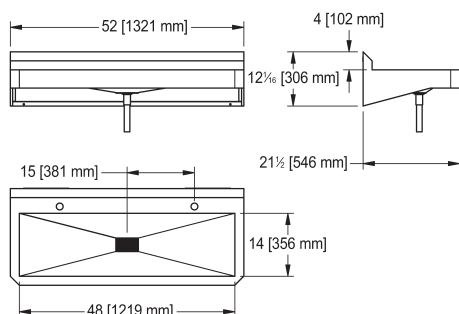

Designer double hand wash basin WHB5222-7

Designer wall hung basin. 16 gauge (1.8 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are polished to a #4 satin finish. Includes 1 1/4" (DN 32) waste fitting included. Features a vandal-resistant laser cut pyramid waste cover. Unit is installed using supplied wall brackets. Optional wall carrier IWC2203 is available.

Certified to ASME A112.19.3/CSA B45.4.

Optional shroud WHB5222-RS

Wheelchair accessible: meets ADA (Americans with disabilities act guidelines), ANSI A117.1 (Accessible and usable buildings and facilities), and CSA B651-04. Check local codes to ensure compliance.

Outside dimensions **21 1/2 x 52 x 12 1/16"**

Inside bowl **21 1/2 x 48 x 5"**

Waste location **Center**

\$ 3,736



Removable shroud for WHB5222-7 WHB5222-RS

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Satin finish.

Shroud extends 20 9/16" below the bottom of the basin.

Outside dimensions **21 5/16 x 7 x 20 5/8"**

\$ 706

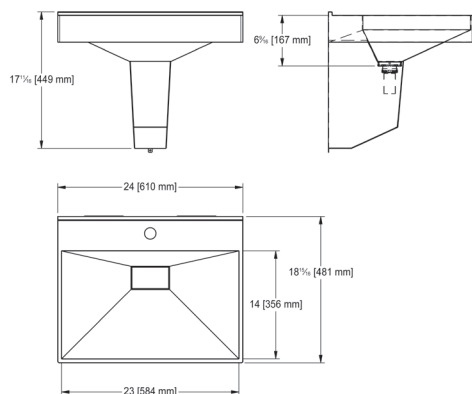

Cleopatra single bowl hand wash basin AWHBS2419-7

Designer wall hung basin. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are polished to a #4 satin finish. Basin features vandal-resistant waste cover attached via concealed cable. Integral grid waste opening and threaded connection underneath to accept a 1 1/2" tailpiece (included). Separate waste fitting not required.

Basin is installed using supplied wall brackets, recommended in-wall carrier IWC2203 sold separately.

Certified to ASME A112.19.3/CSA B45.4. Wheelchair accessible: meets ADA (Americans with Disabilities Act) guidelines, ANSI A117.1 (Accessible and usable buildings and facilities), and CSA B651-04 (Accessible design for the built environment). Check local codes to ensure compliance.

Outside dimensions **18 15/16 x 24 x 17 11/16"**

Inside bowl **16 x 14 x 6 9/16"**

Waste location **Center back**

\$ 1,876


Optional wall carrier

IWC2203

In-wall carrier

See details on p. 59





Wheelchair accessible wall hung basin **AWHB2220W-3-1**

Single wash basin made from a unique Franke resin-bonded solid surface material with pore-free, smooth UV resistant gelcoat with high-polish surface. Shallow basin featuring a splash reduction rib. 1 1/2" grid waste included. Unit is installed using supplied wall hanger brackets.

Optional in-wall carrier IWC2203 is available.

cUPC certified and compliant with CSA B45.5- 11/IAPMO Z124-2011.

Wheelchair accessible: meets ADA (Americans with Disabilities Act), ANSI A117.1 (Accessible and usable buildings and facilities) and CSA B651-04 (check local codes to ensure compliance).

Outside dimensions **18 15/16 x 24 x 17 11/16"**

Inside bowl **16 x 14 x 6 9/16"**

Waste location **Center back**

\$1,493

Optional wall carrier

IWC2203

In-wall carrier

See details on p. 59




Designer, semi-public hand wash basins



Designer hand wash basin, no overflow WHB2221-7

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finish. Designed for either new installation or replacement/retrofit onto select vitreous china wall carriers. Edge is formed as an anti-spill rim. Includes one piece wall hanger bracket. 1 1/4" (32 mm) grid strainer waste kit included. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **20 15/16 x 21 1/2 x 11 1/4"** Inside bowl **13 x 14 1/2 x 5"** Waste location **Center back** Overflow **No**


\$1,448

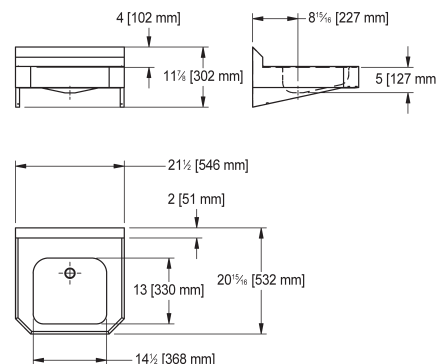

Designer hand wash basin, with overflow WHB2221-8

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finish. Designed for either new installation or replacement/retrofit onto select vitreous china wall carriers. Edge is formed as an anti-spill rim. Includes one piece wall hanger bracket. Accepts 1 1/4" (32 mm) waste kit with overflow (not included). Order model #3700. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **20 15/16 x 21 1/2 x 11 1/4"** Inside bowl **13 x 14 1/2 x 5"** Waste location **Center back** Overflow **Yes**



\$1,448

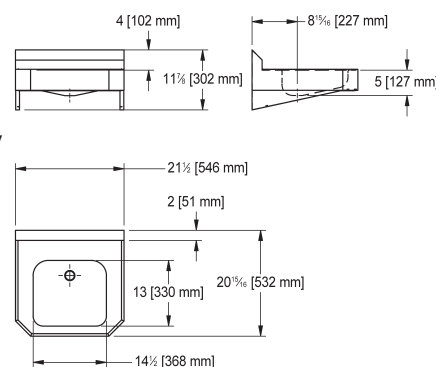

Removable shroud for WHB2221 basins WHB2221-RS

Gauge 18
Satin finish Stainless Steel
Outside dimensions **11 1/4 x 8 x 14 7/8"**

\$376



Cover plate for WHB2221-RS shroud WHB2221-UC

Bottom cover plate for WHB2221-RS shroud prevents unwanted access to plumbing fixtures. Overall dimensions **21 x 21"**

\$282



Designer, semi-public hand wash basins



Designer basin WT400C-7

Designer single wash basin for wall mounting.
19 gauge (1.0 mm) seamless welded bowl. Front panel has 45° corner edges.

Exposed surfaces are polished to a satin finish.

Accepts 1 1/4" (32 mm) waste kit, not included.

Basin is installed using prewelded mounting brackets.

Optional shroud **WT-RS** available.



Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **17 13/16 x 15 3/4"**

Inside bowl **12 x 13 3/8 x 5 9/16"**

Waste location **Center back**

\$1,288



Corner wall mount hand wash basin WT310E-7

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel.

Exposed surfaces are brushed finish.

Includes installation kit.

Accepts 1 1/4" (32 mm waste kit), not included.



Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **12 3/16 x 12 3/16"**

Inside bowl **6 1/8 x 11 7/16 x 4 3/4"**

Waste location **Center**

\$ 980



Designer basin WT500C-7

Designer single wash basin for wall mounting.
19 gauge (1.0 mm) seamless welded bowl.

Front panel has 45° corner edges.

Exposed surfaces are polished to a satin finish.

Accepts 1 1/4" (32 mm) waste kit, not included.

Basin is installed using prewelded mounting brackets.

Optional shroud **WT-RS** available.



Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **17 9/16 x 19 11/16"**

Inside bowl **11 7/16 x 15 3/4 x 5 9/16"**

Waste location **Center back**

\$1,442





Designer, semi-public hand wash basins



Designer basin WT600C-7

Designer single wash basin for wall mounting.
19 gauge (1.0 mm) seamless welded bowl.
Front panel has 45° corner edges.
Exposed surfaces are polished to a satin finish.
Accepts 1 1/4" (32 mm) waste kit, not included.
Basin is installed using prewelded mounting brackets.
Wheelchair accessible.
Optional shroud **WT-RS** available.
Certified to ASME A112.19.3/CSA B45.4.
Outside dimensions **18 7/8 x 23 5/8"**
Inside bowl **13 3/8 x 21 1/4 x 5 3/4"**
Waste location **Center back**


\$1,562

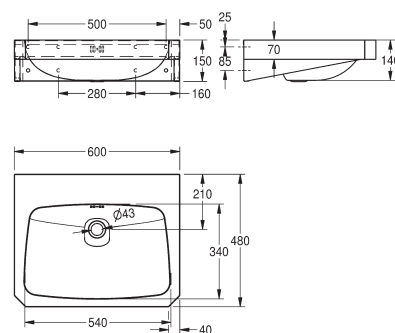

Shroud for WT400C/WT500C/WT600C basins WT-RS

Trap cover manufactured from 18 gauge, type 304 stainless steel. Exposed surfaces are satin finished. For wall mount installation of wash basin models WT400C, WT500C, WT600C and WHB1617 series.
Outside dimensions **10 1/2 x 6 1/2 x 15 3/4"**

\$ 876

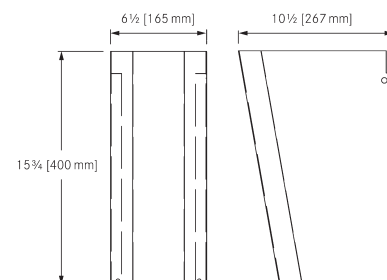


Hand wash basins, institutional



For wall mount faucet, 6" deep WHB1616-3

Gauge **18**
Outside dimensions **16 1/4 x 17"**
Inside bowl **12 x 14 x 6"**
#4 satin finish
Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper.
One piece wall hanger included, separate sink carrier not required.
Optional shroud **WT-RS** sold separately
Waste location **Center back**

\$ 984

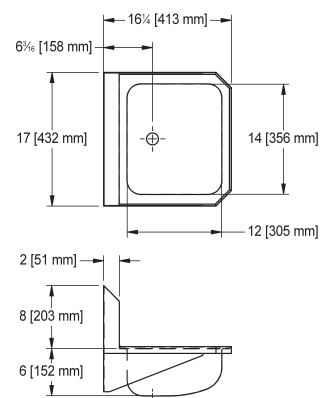

Hand wash basins, institutional



Wall hung basin, 1 1/2" waste WHB1617-3

Gauge 18

Outside dimensions 17 x 16 1/2"

Inside bowl 12 x 14 x 6"

#4 satin finish


Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper.

One piece wall hanger included, separate sink carrier not required.

Optional shroud **WT-RS** sold separately

Waste location **Center back**

\$1,271

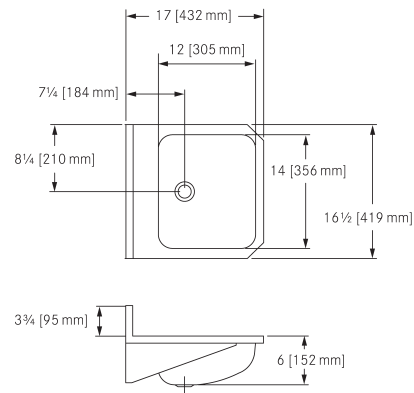

Wall hung basin with overflow, 1 1/2" waste WHB1617-6

Gauge 18

Outside dimensions 17 x 16 1/2"

Inside bowl 12 x 14 x 6"

#4 satin finish


Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper, tailpiece, and overflow.

One piece wall hanger included, separate sink carrier not required.

Optional shroud **WT-RS** sold separately

Waste location **Center back**

\$1,413

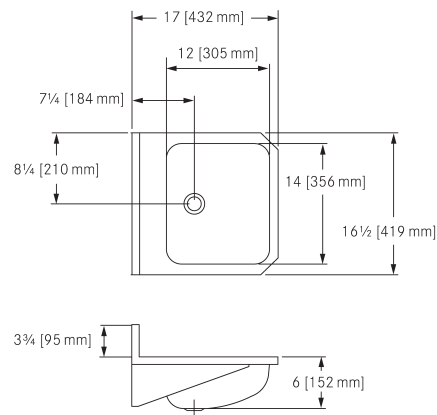

Wall hung basin, 1 1/4" waste WHB1617-7

Gauge 18

Outside dimensions 17 x 16 1/2"

Inside bowl 12 x 14 x 6"


#4 satin finish

Accepts 1 1/4" (32 mm) waste assembly, not included.

Optional shroud **WT-RS** sold separately

Waste location **Center back**

\$1,244

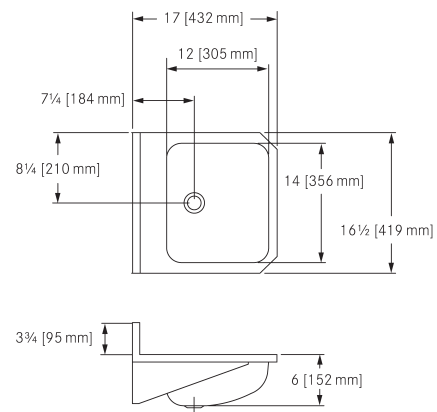

Hand wash basins, institutional



Wall hung basin, 1 1/2" waste WHB1819-3

Wash basin for wall mounting. 18 gauge (1.2 mm) stainless steel. Exposed surfaces are polished to a #4 satin finish.

Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper.

16 gauge side wall brackets and one piece wall hanger. Separate sink carrier is not required.


Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **19 x 18 1/2"**

Inside bowl **14 x 16 x 7"**

Waste location **Center**

\$1,342

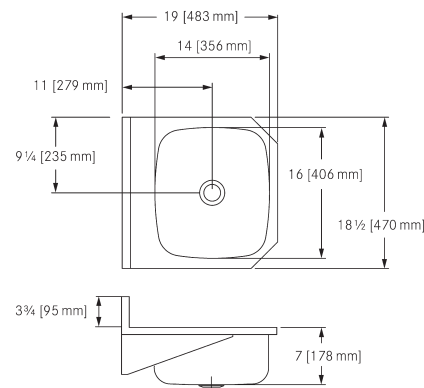

Wall hung basin with overflow, 1 1/2" waste WHB1819-6

Wash basin for wall mounting. 18 gauge (1.2 mm) stainless steel. Exposed surfaces are polished to a #4 satin finish.

Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper, tailpiece and overflow.

16 gauge side wall brackets and one piece wall hanger. Separate sink carrier is not required.


Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **19 x 18 1/2"**

Inside bowl **14 x 16 x 7"**

Waste location **Center**

\$1,429

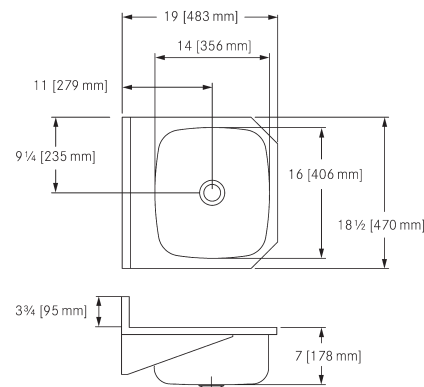

Wall hung basin, 1 1/4" waste WHB1819-7

Wash basin for wall mounting. 18 gauge (1.2 mm) stainless steel. Exposed surfaces are polished to a #4 satin finish.

Accepts 1 1/4" (32 mm) waste assembly, not included.

16 gauge side wall brackets and one piece wall hanger. Separate sink carrier is not required.


Certified to ASME A112.19.3-2008 / CSA B45.4-08

Outside dimensions **19 x 18 1/2"**

Inside bowl **14 x 16 x 7"**

Waste location **Center**

\$1,307

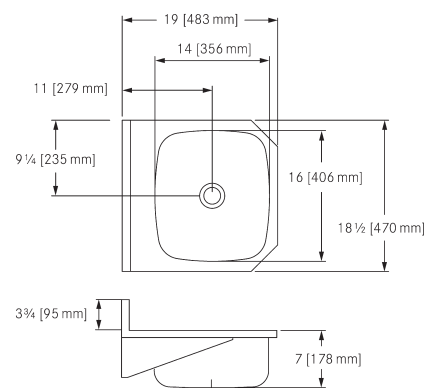

See page 100 for waste fittings

Hand wash basins, institutional



Hand wash basin with side side splashes WHB1716SPL-3

20 gauge (0.9 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finish.

Radius coved bowl corners.

Includes one piece wall hanger bracket.

Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper.


Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **15 1/2 x 16 3/4 x 13"**

Inside bowl **9 1/4 x 12 x 6"**

Waste location **Center**

\$ 1,445

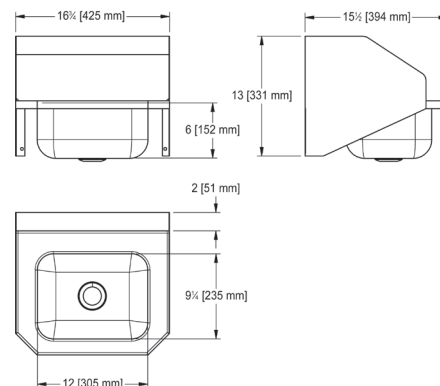

Hand wash basin, 20 gauge WHB1716-3

20 gauge (0.9 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finish.

Radius coved bowl corners.

Includes one piece wall hanger bracket.

Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper.


Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **15 1/2 x 16 3/4 x 12 3/4"**

Inside bowl **9 1/4 x 12 x 6"**

Waste location **Center**

\$ 1,189

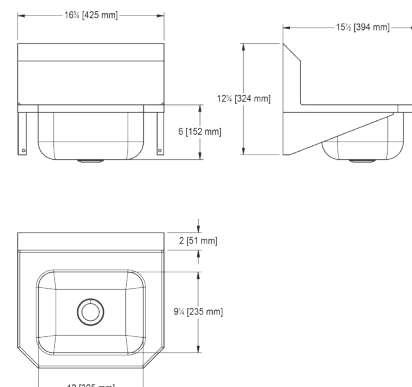

Hand wash basin with shroud WHBS181910-3

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finish.

Includes one piece wall hanger bracket. Separate sink carrier not required.

Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper.


Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **19 x 16 x 14 1/2"**

Inside bowl **14 x 16 x 10"**

Waste location **Center**

\$ 3,137

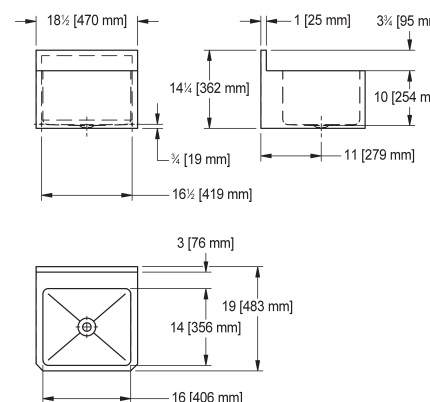

Wall service sink, 14 gauge WSS6713

14 gauge (2.0 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finish.

Radius coved bowl corners.

Includes 3 1/2" (89 mm) crumb cup strainer waste kit with 1 1/2" stainless steel tailpiece.


Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **19 x 20 x 25"**

Inside bowl **16 x 17 x 13"**

Waste location **Center**

\$ 7,469

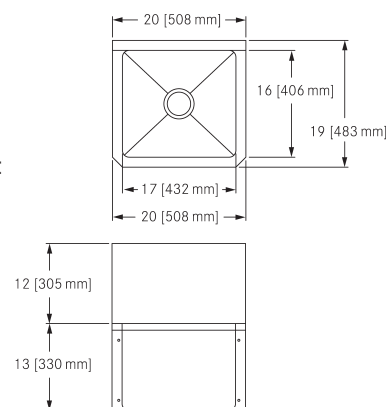


Washroom Accessories



71	Faucets
73	Washroom accessories
74	Aqua-foam soap dispensers
75	Multi-feed soap dispensers


Aquarius faucets



Aquarius wall mount AC powered faucet **AT02-005AC**

Polished finish, regular flow 5 Lpm/ 1.3 gpm
Type 316 stainless steel hands-free faucet. Wall mount installation, high polish finish.
AC plug-in power option.
Highly intelligent electronic controls with programmable sensor ranges, run times, and automatic purging to eliminate stagnant water.
Certified to ASME A112.18.1 / CSA B125.1
Faucet dimensions **1 1/2 x 5 7/8"**


\$1,574

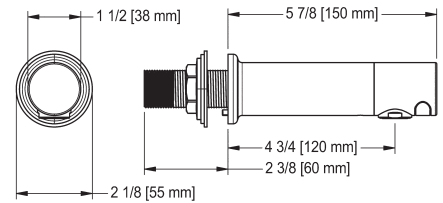

Aquarius wall mount DC powered faucet **AT02-005DC**

Polished finish, regular flow 5 Lpm/ 1.3 gpm
Type 316 stainless steel hands-free faucet. Wall mount installation, high polish finish.
DC battery power option.
Highly intelligent electronic controls with programmable sensor ranges, run times, and automatic purging to eliminate stagnant water.
Certified to ASME A112.18.1 / CSA B125.1
Faucet dimensions **1 1/2 x 5 7/8"**

\$1,641

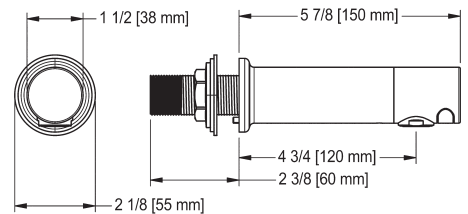

cUPC®

Mixing valve **MIX-LF**

Thermostatic mixing valve for use with Franke faucets.

\$348

Faucets



5.7
Lpm

1.5
gpm

cUPC®


Electronic faucet, temperature adjust handle HHF23T

Hands free faucet for deck mounting with IR sensor near faucet base. 5.7 Lpm/ 1.5 gpm flow rate. Flat stop style with temperature adjust handle on side. Chrome finish.

Battery operated (DC) or plug in (AC) with battery backup. The battery life is around 100,000 cycles if running on battery only. Certified to ASME A112.18.1 / CSA B125.1

Faucet dimensions 1⁵/₈ x 7 x 5⁷/₈"

\$ 972

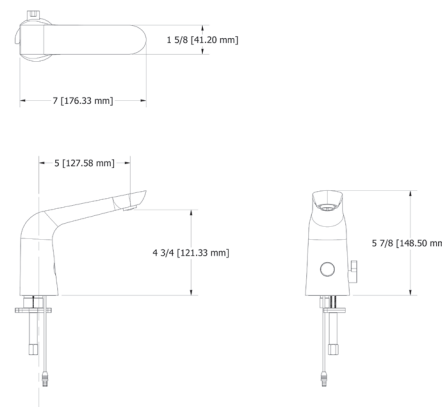

6.0
Lpm

1.5
gpm

cUPC®

Laminar flow deck mount faucet HHF180-6L

Hands free faucet for deck mounting with IR sensor. Open spout, free of flow control or aerators. Chrome finish.

6.0 Lpm/ 1.5 gpm laminar flow rate.


Supplied 6VDC plug in transformer included.

Easy topmount installation.

Automatic anti-vandal timeout. Certified to ASME A112.18.1 / CSA B125.

Overall dimensions 2 x 5¹/₄ x 10¹/₄"

\$ 1,003

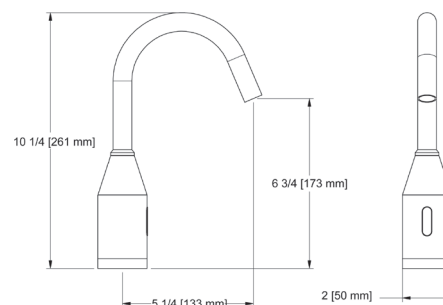

6.0
Lpm

1.5
gpm

cUPC®

Laminar flow wall mount faucet HHF180-6L-W

Hands free faucet for wall mounting with IR sensor. Open spout, free of flow control or aerators. Chrome finish.

6.0 Lpm/ 1.5 gpm laminar flow rate.


Supplied 6VDC plug in transformer included.

Easy topmount installation.

Automatic anti-vandal timeout. Certified to ASME A112.18.1 / CSA B125.

Overall dimensions 2 x 7¹/₄ x 11"

\$ 1,103

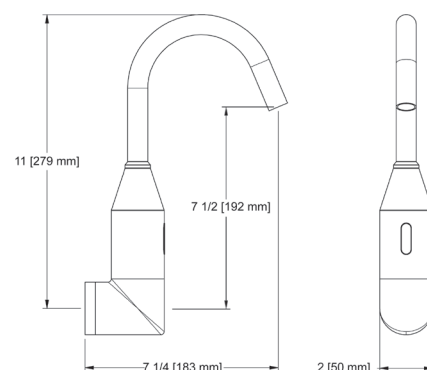

cUPC®

Mixing valve MIX-LF

Thermostatic mixing valve for use with Franke faucets.

\$ 348

Washroom accessories




Back rest CM-16104

Back rest for wall mount toilet.
Stainless steel bar with #4 satin finish with flanges and covers, with antique white solid core plastic laminate panel back.
Concealed snap flanges and mounting hardware included. Provide adequate backing in wall for support and comply to local codes for barrier free requirement.

Dimensions **8 5/8 x 12 x 4"**

\$ 485

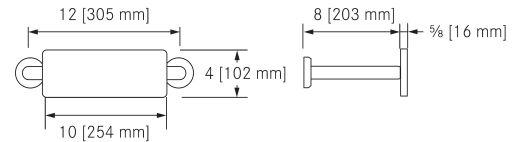


Back rest, for standard installations CM-16104-WM

Back rest for wall mount toilet for industry standard spud location.
Stainless steel bar has #4 satin finish with flanges and covers, with antique white solid core plastic laminate panel back.
Concealed snap flanges and mounting hardware included. Provide adequate backing in wall for support and comply to local codes for barrier free requirement.

Dimensions **6 x 12 x 4"**

\$ 485

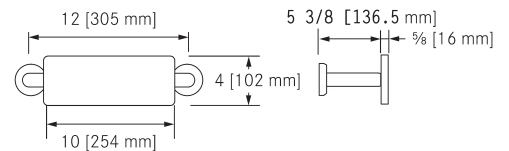


Soap dispenser SD80V-EXT

Manual soap dispenser with extension for "Murro" basin (or equivalent).
For use with liquid soap.
Chromium plated brass.
Includes a 1 litre polyethylene container for use with liquid soap. Replacement part available for container.

Dimensions **5 1/2 x 18 5/8 x 1 3/4"**

\$ 475

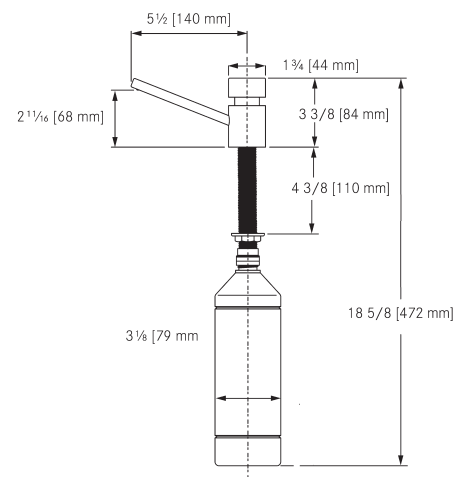

Aqua-foam soap dispensers





Foam soap dispenser, wall mount

Polished finish with light ring

SD01-001CFL

Stainless steel touch-free soap dispenser. AC powered (plug in) LED status light to notify of sensor blockage, soap level or if the wrong type of soap is used. Soap dispenser will dispense once every 48 hours if there is no action in between to avoid a clog in the tip. 1.5 liter (50 fl oz.) easy refill soap tank included. Overall dimensions **1 x 4 5/16"**

\$ 907

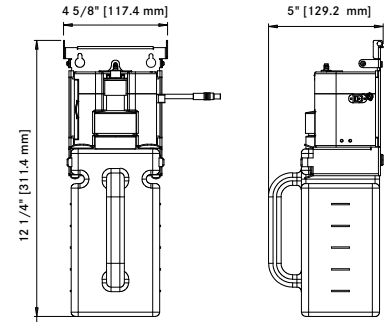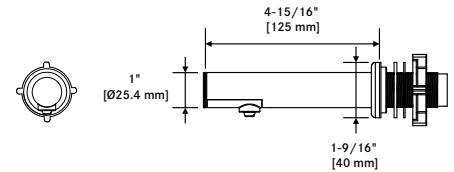

Foam soap dispenser, wall mount

Satin finish with light ring

SD01-001SFL

\$ 888





Foam soap dispenser, deck mount

Polished finish with light ring

SD01-003CFL

Stainless steel touch-free soap dispenser. AC powered (plug in) LED status light to notify of sensor blockage, soap level or if the wrong type of soap is used. Soap dispenser will dispense once every 48 hours if there is no action in between to avoid a clog in the tip. 1.5 liter (50 fl oz.) easy refill soap tank included. Overall dimensions **1 x 6 5/8"**

\$ 924

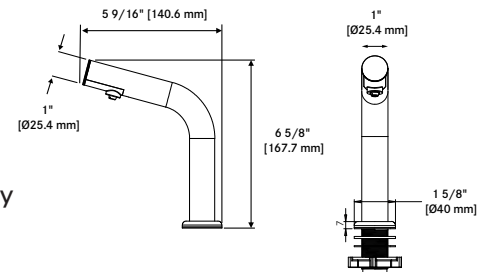

Foam soap dispenser, deck mount

Satin finish with light ring

SD01-003SFL

\$ 943





Foam soap dispenser, deck mount

SD01-002CF

Stainless steel touch-free soap dispenser. Requires either AC power or DC battery power to operate the soap dispenser. Soap dispenser will dispense once every 48 hours if there is no action in between to avoid a clog in the tip. 1.5 liter (50 fl oz.) easy refill soap tank included. Overall dimensions **1 1/2 x 5 3/8"**

\$ 799

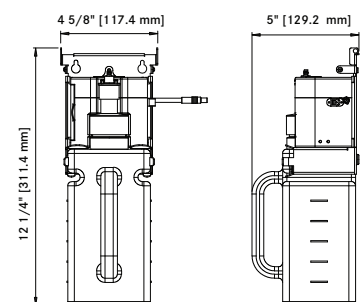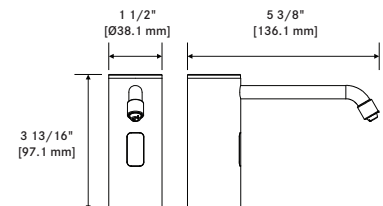

Foam soap dispenser, deck mount

Satin finish

SD01-002SF

\$ 778

Aqua-foam soap dispensers - multifeed



Model SD01-001 shown




Model SD01-003 shown



Model SD01-002 shown

Stainless steel touch-free soap dispenser unit as part of multifeed tank system. Ideal for high-traffic environments including airports, bus terminals, and other public spaces. Multi-feed model, up to six (6) units may be fed from a single multifeed tank. SD01-MFT sold separately, see below. Multifeed soap dispenser is sold with wall mount motor unit. Requires either AC power or DC battery power to operate the soap dispenser. Soap dispenser will dispense once every 48 hours if there is no action in between to avoid a clog in the tip.

Soap pump mechanism included with every multifeed soap dispenser unit. SD01-MFT tank sold separately.

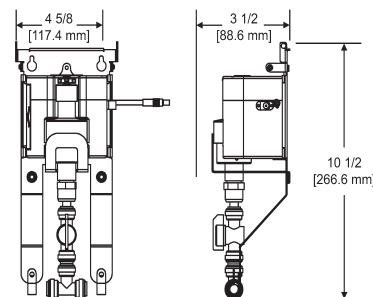



MODEL	DESCRIPTION	Overall Dimensions			FINISH	MOUNTING TYPE	PRICE
		FRONT-BACK	LEFT-RIGHT	HEIGHT			
SD01-001CFL-MF	Wall mount multifeed dispenser with light ring, polished	4 15/16" (125 mm)	1" (25 mm)	1" (25 mm)	High polish	WALL	\$ 788
SD01-001SFL-MF	Wall mount multifeed dispenser with light ring, satin finish	4 15/16" (125 mm)	1" (25 mm)	1" (25 mm)	Satin	WALL	\$ 770
SD01-003CFL-MF	Deck mount, curved multifeed dispenser with light ring, polished	5 9/16" (141 mm)	1" (25 mm)	6 5/8" (168 mm)	High polish	DECK	\$ 807
SD01-003SFL-MF	Deck mount, curved multifeed dispenser with light ring, satin finish	5 9/16" (141 mm)	1" (25 mm)	6 5/8" (168 mm)	Satin	DECK	\$ 827
SD01-002CF-MF	Deck mount multifeed dispenser, polished	5 3/8" (136 mm)	1 1/2" (38 mm)	3 13/16" (97 mm)	High polish	DECK	\$ 680
SD01-002SF-MF	Deck mount multifeed dispenser, satin finish	5 3/8" (136 mm)	1 1/2" (38 mm)	3 13/16" (97 mm)	Satin	DECK	\$ 659

Aqua-foam multifeed soap dispenser tank, 6L SD01-MFT

Wall mounted commercial, multi-fed foam soap dispenser model can supply up to 6 dispensers. 6 litre capacity (1.6 gallons) for foam soap. Only for use with the multifeed models Franke Aqua-foam soap dispensers, in table above with suffix -MF. 6VDC plug in transformer supplied per tank. Fills through opening in countertop. Flange with LED light ring and wall mounting brackets included. LED light ring on fill cap alerts low soap conditions at a glance. During filling, an audible melody will play to alert filling is complete.

Overall dimensions **7 3/8" x 7 1/4" x 13 7/8"**

\$ 586

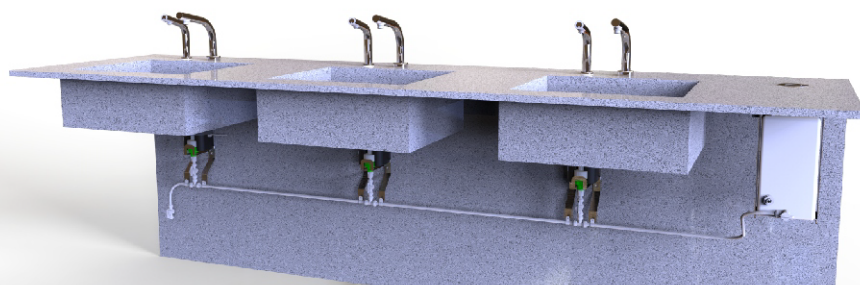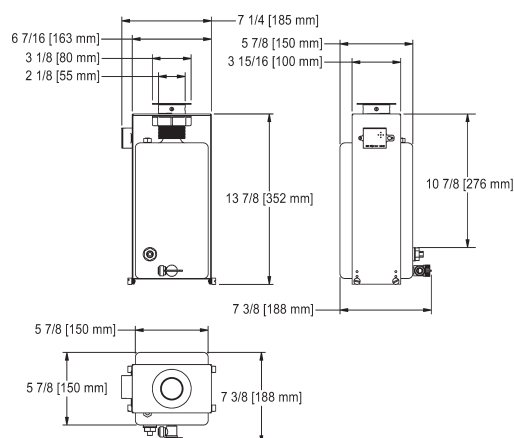



Drinking

Fountains



77	Quasar UVC bottle fillers
80	Bottle fillers
83	Drinking fountain & bottle filler combination
87	Split level drinking fountain & bottle filler combination
90	Drinking fountains
95	Remote chillers
96	Filtration

Quasar UVC retrofit bottle fillers



Quasar retrofit kit, sensor activated

KEPWEBQ



Retrofit a bottle filler onto an existing drinking fountain with this retrofit unit. Ideal for healthcare settings, QUASAR sensor activated bottle filler has UVC-LED treatment at the dispense point, which disinfects the water while it is being dispensed. UVC-LED also cycles on periodically to keep the dispense point sanitized between uses.



When retrofitted to either the KEP8AC or KEP8CSL the bottle filler will satisfy ANSI A117.1 and ADA requirements when properly installed. Units also meet guidelines for children's accessibility providing the floor to orifice height is 30" and proper clear floor space is provided for frontal approach.

Standard Features:

- Mercury-free UVC-LED treatment at the dispense point
- Waterways are lead-free in materials & construction
- Hands-free bottle filler with 20 second shut off, integrated filter monitor

Overall dimensions **6 x 16 1/4 x 19 5/16"** (FB x LR x H)

\$ 4,264



Quasar retrofit kit, surface mount, sensor activated

KEPWSMEBQ-STN



Surface mount bottle filler with hands-free operation.

Ideal for healthcare settings, QUASAR bottle filler has UVC-LED treatment at the dispense point, which disinfects the water while it is being dispensed. UVC-LED also cycles on periodically to keep the dispense point sanitized between uses.

When retrofitted to either the KEP8AC or KEP8CSL the bottle filler will satisfy ANSI A117.1 and ADA requirements when properly installed. Units also meet guidelines for children's accessibility providing the floor to orifice height is 30" and proper clear floor space is provided for frontal approach.

Standard Features:

- Mercury-free UVC-LED treatment at the dispense point
- Waterways are lead-free in materials & construction
- Hands-free bottle filler with 20 second shut off, integrated filter monitor


Overall dimensions **5 11/16 x 16 5/16 x 24 15/16"** (FB x LR x H)

\$ 4,513

Quasar UVC bottle fillers & fountains



Model KEP8AC-EBQ-GRY shown

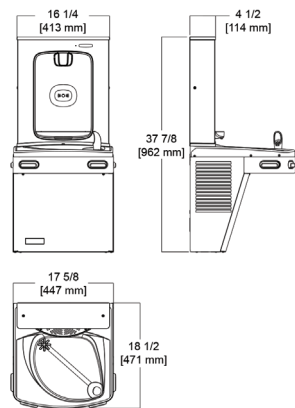

Universal drinking fountain and QUASAR bottle filler combination



Universal drinking fountain with QUASAR bottle filler. Includes the QUASAR sports bottle filler with hands-free activation. QUASAR bottle filler has UVC-LED treatment at the dispense point, which disinfects the water while it is being dispensed. UVC-LED also cycles on periodically to keep the dispense point sanitized between uses.

Basin is designed to eliminate splashing and standing water. Wheelchair accessible, complies with ANSI 117.1 and ADA.

Standard Features:

- Mercury-free UVC-LED treatment at the dispense point
- Waterways are lead-free in materials & construction
- Flexible one-piece water saver bubbler guard

Overall dimensions **18 1/2 x 17 5/8 x 37 7/8"** (FB x LR x H)



CHILLED MODELS ONLY: Deliver 8.0 gph (30 Lph) of 50°F (10°C) water at 90°F (32°C) ambient and 80°F (27°C) inlet water per ASHRAE 18 testing. Fountain has external cold control adjustment and uses high efficiency cooling system and refrigerant R-134a.


MODEL	FOUNTAIN ACTIVATION	CHILLED	BOTTLE FILLER ACTIVATION	UVC DISINFECTION	CABINET FINISH	PRICE
KEP8AC-EBQ-STN	Push pads		Contactless IR sensor		Brushed stainless steel	\$ 7,160
KEP8AC-EBQ-GRY	Push pads		Contactless IR sensor		Greystone finish	\$ 6,834
KEPAC-EBQ-STN	Push pads		Contactless IR sensor		Brushed stainless steel	\$ 5,207
KEPAC-EBQ-GRY	Push pads		Contactless IR sensor		Greystone finish	\$ 4,881

All products comply with all known Plumbing codes, are listed by Underwriters' Laboratories (UL) to U.S. and Canadian standard, are certified to NSF/ANSI Standard 61, NSF/ANSI Standard 372, and are lead free.

Quasar UVC combination bottle fillers & fountains



Model KEP8ACSL-EBQ-GRY shown

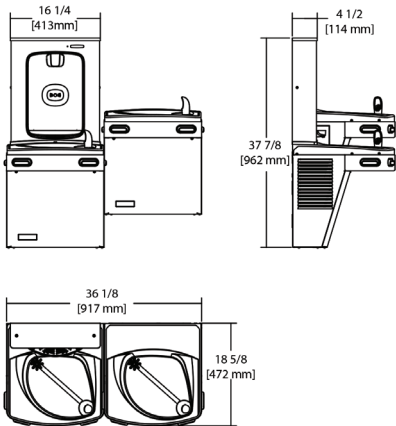

Universal split level drinking fountain and QUASAR bottle filler combination



Universal split level drinking fountains with one QUASAR bottle filler. Includes the QUASAR sports bottle filler with hands-free activation. QUASAR bottle filler has UVC-LED treatment at the dispense point, disinfecting the water while it is being dispensed. UVC-LED also cycles on periodically to keep the dispense point sanitized between uses. Basin is designed to eliminate splashing and standing water. Wheelchair accessible, complies with ANSI 117.1 and ADA.

Standard Features:

- Mercury-free UVC-LED treatment at the dispense point
- Waterways are lead-free in materials & construction
- Flexible one-piece water saver bubbler guard


Overall dimensions **18 5/8 x 36 1/8 x 37 7/8"** (FB x LR x H)



CHILLED MODELS ONLY: Deliver 8.0 gph (30 Lph) of 50°F (10°C) water at 90°F (32°C) ambient and 80°F (27°C) inlet water per ASHRAE 18 testing. Fountain has external cold control adjustment and uses high efficiency cooling system and refrigerant R-134a.

MODEL	FOUNTAIN ACTIVATION	CHILLED	BOTTLE FILLER ACTIVATION	UVC DISINFECTION	CABINET FINISH	PRICE
KEP8ACSL-EBQ-STN	Push pads		Contactless IR sensor		Brushed stainless steel	\$ 8,642
KEP8ACSL-EBQ-GRY	Push pads		Contactless IR sensor		Greystone finish	\$ 8,318
KEPACSL-EBQ-STN	Push pads		Contactless IR sensor		Brushed stainless steel	\$ 6,690
KEPACSL-EBQ-GRY	Push pads		Contactless IR sensor		Greystone finish	\$ 6,366

SPOTLIGHT ON UVC-LED WATER TREATMENT



UVC LED light penetrates cell walls and destroys pathogens at point of dispensation.





Truly chemical-free water disinfection does not alter the taste of treated water.



UVC light pulses every 10 minutes of inactivity to keep dispense point sanitized.

Bottle filler retrofit kits



Retrofit bottle filler, sensor activated KEPWEBF



Designed to retrofit on existing KEPAC family of coolers as well as existing competitors products. Cabinet finish is brushed stainless steel. Waterways are lead-free in materials and construction.

If installed onto a filtered water cooler, the status indicator can signal when filter changes are recommended. With non-filtered coolers, this system status will remain green. This retrofit is not meant to install on an electric eye cooler. Units with optional glass fillers must have the glass filler disconnected and removed. Surface mount frame assembly. Installation instructions included.

1.0 gpm (3.7 Lpm) flow rate.

Sensor activated bottle filler with electronic digital counter.

Overall dimensions **6 x 16 1/4 x 19 5/16"** (FB x LR x H)



\$1,949



Retrofit bottle filler, sensor activated with bottle filler filtration included KEPWEBFF

Versafilter III filtration kit factory installed.

\$2,144



Retrofit bottle filler, manual activation KEPWSBF



The KEPWSBF sports bottle filler is designed to retrofit on existing KEPAC family of coolers as well as existing competitors products. Cabinet finish is brushed stainless steel. Waterways are lead-free in materials and construction.

Unit is mechanically activated with a push button. Surface mount frame assembly. Installation instructions included. 0.5gpm (1.9 Lpm) flow rate.

Overall dimensions **6 7/16 x 16 1/4 x 19 5/16"** (FB x LR x H)

\$1,590



Retrofit bottle filler, manual activation with bottle filler filtration included KEPWSBFF

Versafilter III filtration kit factory installed.

\$1,759

All products comply with all known Plumbing codes, are listed by Underwriters' Laboratories (UL) to U.S. and Canadian standard, are certified to NSF/ANSI Standard 61, NSF/ANSI Standard 372, and are lead free.

Bottle fillers, surface mount



Surface mount, sensor activated bottle filler

KEPWSMEBF-STN



Surface mount sports bottle fillers are non-refrigerated units that deliver ambient water. Built-in 100 micron strainer stops particles before they enter the waterway. Waterways are lead-free in materials and construction. Heavy duty steel frame.





Tailpiece is sized to accept either 1 1/2" (38 mm) or 1 1/4" (32 mm) P-trap. P-Trap not included.



Sensor activated with bottle counter.

Overall dimensions **5 11/16 x 16 5/16 x 24 15/16"** (FB x LR x H)

\$ 2,687



Surface mount, manually activated bottle filler

KEPWSMSBF-STN



Surface mount sports bottle fillers are non-refrigerated units that deliver ambient water. Built-in 100 micron strainer stops particles before they enter the waterway. Waterways are lead-free in materials and construction. Heavy duty steel frame.





Tailpiece is sized to accept either 1 1/2" (38 mm) or 1 1/4" (32 mm) P-trap. P-Trap not included.



Manually activated with push button.

Overall dimensions **5 11/16 x 16 5/16 x 24 15/16"** (FB x LR x H)


\$ 2,385



Bottle fillers, stand alone



Model KEMWSM8EBF-STN shown

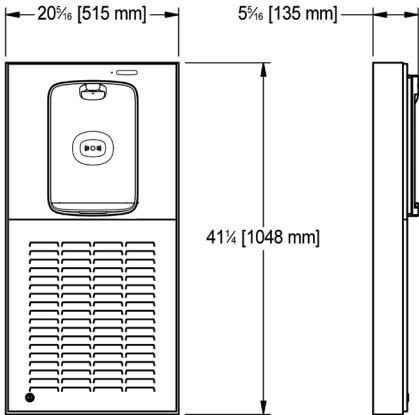

Stand alone bottle fillers



Stand alone wall mounted sports bottle filler with frame. Heavy duty galvanized steel frame with brushed stainless steel panels. Built-in 100 micron strainer stops particles before they enter the waterway. Included tailpiece is sized to accept either 1 1/2" (38 mm) or 1 1/4" (32 mm) P-trap (not included). Waterways are lead-free in materials & construction .

Surface mount model does not need a cut-out for this unit to mount on the wall, only a small cut-out for the water line.



CHILLED MODELS ONLY: Deliver 8.0 gph (30 Lph) of 50°F (10°C) water at 90°F (32°C) ambient and 80°F (27°C) inlet water per ASHRAE 18 testing. Fountain has external cold control adjustment and uses high efficiency cooling system and refrigerant R-134a.





QUASAR bottle filler model has UVC-LED treatment at the dispense point, which disinfects the water while it is being dispensed. UVC-LED also cycles on periodically to keep the dispense point sanitized between uses.

MODEL	MOUNTING TYPE	CHILLED	BOTTLE FILLER ACTIVATION	UVC DISINFECTION	FRONT-TO-BACK DIMENSIONS	PRICE
KEMWSM8EBF-STN	Surface		Contactless IR sensor		5 5/16" (135 mm)	\$ 10,232
KEMWSMEBF-STN	Surface		Contactless IR sensor		5 5/16" (135 mm)	\$ 8,703
KEMW8EBQ-STN	Recessed		Contactless IR sensor		1 5/16" (33 mm)	\$ 6,835
KEMW8EBF-STN	Recessed		Contactless IR sensor		1 5/16" (33 mm)	\$ 9,248
KEMW8SBF-STN	Recessed		Push button		1 5/16" (33 mm)	\$ 7,036
KEMWEBF-STN	Recessed		Contactless IR sensor		1 5/16" (33 mm)	\$ 7,719

All products comply with all known Plumbing codes, are listed by Underwriters’ Laboratories (UL) to U.S. and Canadian standard, are certified to NSF/ANSI Standard 61, NSF/ANSI Standard 372, and are lead free.

Modular combination bottle fillers & fountains



Modular combination, chilled, sensor activated bottle filler

KEM8WR-EBF-STN

Combination chilled drinking fountain with electronic sports bottle filler. Sports bottle filler cabinet finish is brushed stainless steel. Drinking fountain is mechanically activated. Built-in 100 micron strainer stops particles before they enter the waterway. One piece stainless steel top. Wheelchair accessible, complies with ANSI 117.1 and ADA.

Standard Features

- Waterways are lead-free in materials & construction
- Flexible one-piece water saver bubbler guard
- Heavy duty galvanized steel frame
- High efficiency cooling system and refrigerant R-134a
- Contactless sports bottle filler


Overall dimensions **19 x 19 3/4 x 45 3/4"** (FB x LR x H)

\$ 10,866

Universal combination drinking fountains with electronic bottle filler



Model KEP8AC-EBF-STN shown

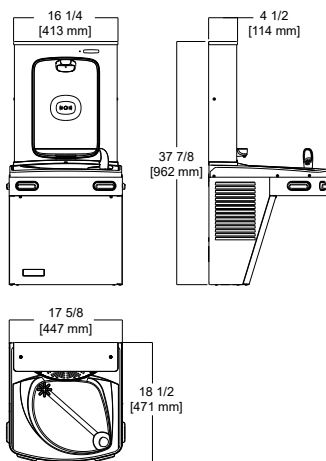

Universal drinking fountain and bottle filler combination



Universal drinking fountain with electronic bottle filler. Basin is designed to eliminate splashing and standing water. Water saver bubbler reduces wasted water by 50% and has a flexible guard and that operates between 20 and 100 PSI (1.4 – 6.9 bar). Wheelchair accessible, complies with ANSI 117.1 and ADA.

Standard features:

- Waterways are lead-free in materials & construction
- Flexible one-piece water saver bubbler guard
- Stainless steel top and heavy-duty galvanized steel frame
- External stream height adjustment

Overall dimensions **18 1/2" x 17 5/8" x 37 7/8"** (FB x LR x H)



CHILLED MODELS ONLY: Deliver 8.0 gph (30 Lph) of 50°F (10°C) water at 90°F (32°C) ambient and 80°F (27°C) inlet water per ASHRAE 18 testing. Fountain has external cold control adjustment and uses high efficiency cooling system and refrigerant R-134a.



MODELS WITH FILTRATION INCLUDED ONLY: Factory-installed Versafilter III filtration unit included. Filtration unit is located behind the bottle filler. Tilt-n-tether system makes filter changes quick and easy. See page 97 for filtration information.


MODEL	FOUNTAIN ACTIVATION	CHILLED	BOTTLE FILLER ACTIVATION	FILTRATION INCLUDED	CABINET FINISH	PRICE
KEP8ACT-EBF-STN	Contactless IR sensor		Contactless IR sensor		Brushed stainless steel	\$ 7,297
KEP8ACT-EBFF-STN	Contactless IR sensor		Contactless IR sensor		Brushed stainless steel	\$ 7,492
KEP8ACT-EBF-GRY	Contactless IR sensor		Contactless IR sensor		Greystone finish	\$ 6,743
KEP8ACT-EBFF-GRY	Push pads		Contactless IR sensor		Greystone finish	\$ 6,938
KEP8AC-EBF-STN	Push pads		Contactless IR sensor		Brushed stainless steel	\$ 4,708
KEP8AC-EBF-GRY	Push pads		Contactless IR sensor		Greystone finish	\$ 4,333
KEPAC-EBF-STN	Push pads		Contactless IR sensor		Brushed stainless steel	\$ 4,397
KEPAC-EBF-GRY	Push pads		Contactless IR sensor		Greystone finish	\$ 4,047

All products comply with all known Plumbing codes, are listed by Underwriters' Laboratories (UL) to U.S. and Canadian standard, are certified to NSF/ANSI Standard 61, NSF/ANSI Standard 372, and are lead free.

Universal combination drinking fountains with manual bottle filler



Model KEP8AC-SBF-GRY shown

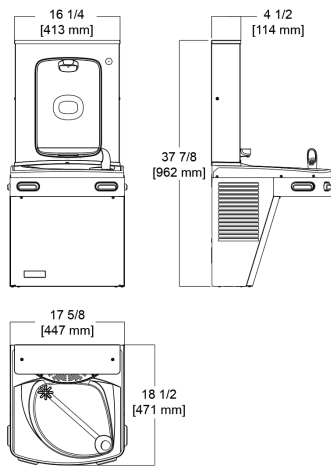

Universal drinking fountain and bottle filler combination



Universal drinking fountain with push button bottle filler. Basin is designed to eliminate splashing and standing water. Water saver bubbler reduces wasted water by 50% and has a flexible guard and that operates between 20 and 100 PSI (1.4 – 6.9 bar). Wheelchair accessible, complies with ANSI 117.1 and ADA.

Standard features:

- Waterways are lead-free in materials & construction
- Flexible one-piece water saver bubbler guard
- Stainless steel top and heavy-duty galvanized steel frame
- External stream height adjustment

Overall dimensions **18 1/2" x 17 5/8" x 37 7/8"** (FB x LR x H)



CHILLED MODELS ONLY: Deliver 8.0 gph (30 Lph) of 50°F (10°C) water at 90°F (32°C) ambient and 80°F (27°C) inlet water per ASHRAE 18 testing. Fountain has external cold control adjustment and uses high efficiency cooling system and refrigerant R-134a.




MODELS WITH FILTRATION INCLUDED ONLY: Factory-installed Versafilter III filtration unit included. Filtration unit is located behind the bottle filler. Tilt-n-tether system makes filter changes quick and easy. See page 97 for filtration information.

MODEL	FOUNTAIN ACTIVATION	CHILLED	BOTTLE FILLER ACTIVATION	FILTRATION INCLUDED	CABINET FINISH	PRICE
KEP8AC-SBF-STN	Push pads		Push button		Brushed stainless steel	\$ 4,442
KEP8AC-SBFF-STN	Push pads		Push button		Brushed stainless steel	\$ 4,576
KEP8AC-SBF-GRY	Push pads		Push button		Greystone finish	\$ 3,688
KEP8AC-SBFF-GRY	Push pads		Push button		Greystone finish	\$ 3,883
KEPAC-SBF-STN	Push pads		Push button		Brushed stainless steel	\$ 3,824
KEPAC-SBF-GRY	Push pads		Push button		Greystone finish	\$ 3,488

Vandal-resistant universal combination bottle fillers & fountains



Model KEPV8AC-EBF-STN shown

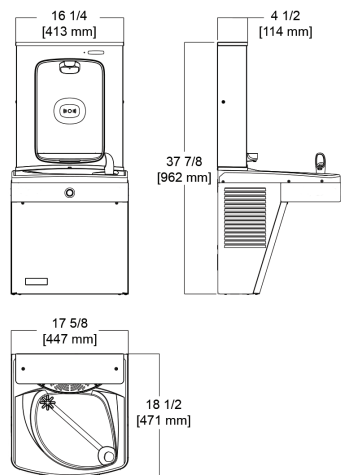

Universal drinking fountain and bottle filler combination, vandal-resistant



Vandal-resistant combination drinking fountain sports bottle filler. Basin is designed to eliminate splashing and standing water. Cabinet finish is brushed stainless steel. Waterways are lead-free in materials and construction. Drinking fountain is push button activated. Built-in 100 micron strainer stops particles before they enter the waterway. Heavy duty galvanized steel frame. Wheelchair accessible, complies with ANSI 117.1 and ADA.

Standard Features

- Waterways are lead-free in materials & construction
- Flexible one-piece water saver bubbler guard
- Stainless steel top and heavy-duty galvanized steel frame
- Vandal-resistant push button activation on drinking fountain

Overall dimensions **18 1/2" x 17 5/8" x 37 7/8"** (FB x LR x H)



CHILLED MODELS ONLY: Deliver 8.0 gph (30 Lph) of 50°F (10°C) water at 90°F (32°C) ambient and 80°F (27°C) inlet water per ASHRAE 18 testing. Fountain uses high efficiency cooling system and refrigerant R-134a.


MODEL	FOUNTAIN ACTIVATION	CHILLED	BOTTLE FILLER ACTIVATION	FILTRATION OPTION	CABINET FINISH	PRICE
KEPV8AC-EBF-STN	Vandal-resistant push button		Contactless IR sensor	Optional: F041253-001	Brushed stainless steel	\$ 6,686
KEPV8AC-SBF-STN	Vandal-resistant push button		Push button	Optional: F041253-001	Brushed stainless steel	\$ 4,477
KEPVAC-EBF-STN	Vandal-resistant push button		Contactless IR sensor	Optional: F041253-001	Brushed stainless steel	\$ 5,867
KEPVAC-SBF-STN	Vandal-resistant push button		Push button	Optional: F041253-001	Brushed stainless steel	\$ 3,611

All products comply with all known Plumbing codes, are listed by Underwriters' Laboratories (UL) to U.S. and Canadian standard, are certified to NSF/ANSI Standard 61, NSF/ANSI Standard 372, and are lead free.

Vandal-resistant split-level combination bottle fillers & fountains



Model KEPV8ACSL-EBF-STN shown

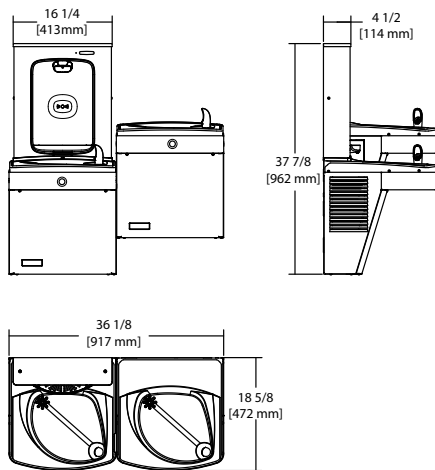

Universal drinking fountain and bottle filler combination, vandal-resistant



Vandal-resistant split-level combination drinking fountain sports bottle filler. Basin is designed to eliminate splashing and standing water. Cabinet finish is brushed stainless steel. Waterways are lead-free in materials and construction. Drinking fountain is push button activated. Built-in 100 micron strainer stops particles before they enter the waterway. Heavy duty galvanized steel frame. Wheelchair accessible, complies with ANSI 117.1 and ADA.

Standard Features

- Waterways are lead-free in materials & construction
- Flexible one-piece water saver bubbler guard
- Stainless steel top and heavy-duty galvanized steel frame
- Vandal-resistant push button activation on drinking fountain

Overall dimensions **18 1/2 x 36 1/8 x 37 7/8"** (FB x LR x H)




CHILLED MODELS ONLY: Deliver 8.0 gph (30 Lph) of 50°F (10°C) water at 90°F (32°C) ambient and 80°F (27°C) inlet water per ASHRAE 18 testing. Fountain uses high efficiency cooling system and refrigerant R-134a.

MODEL	FOUNTAIN ACTIVATION	CHILLED	BOTTLE FILLER ACTIVATION	FILTRATION OPTION	CABINET FINISH	PRICE
KEPV8ACSL-EBF-STN	Vandal-resistant push button		Contactless IR sensor	Optional: F041253-001	Brushed stainless steel	\$ 8,980
KEPV8ACSL-SBF-STN	Vandal-resistant push button		Push button	Optional: F041253-001	Brushed stainless steel	\$ 4,674
KEPVACSL-EBF-STN	Vandal-resistant push button		Contactless IR sensor	Optional: F041253-001	Brushed stainless steel	\$ 7,549
KEPVACSL-SBF-STN	Vandal-resistant push button		Push button	Optional: F041253-001	Brushed stainless steel	\$ 4,369

Universal combination, split-level bottle fillers & fountains



Model KEP8ACSL-EBF-GRY shown

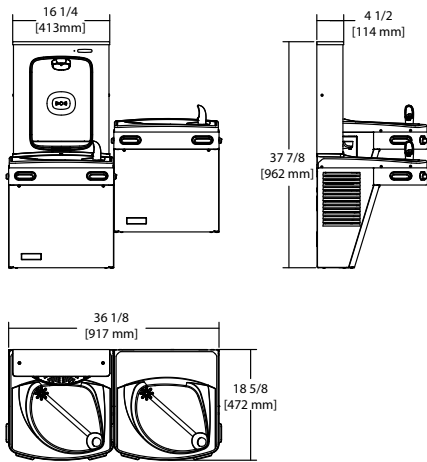

Universal split-level fountain and bottle filler combination



Universal split-level drinking fountain with bottle filler. Bottle filler can be mounted on high or low side. Basin is designed to eliminate splashing and standing water. Water saver bubbler reduces wasted water by 50% and has a flexible guard and that operates between 20 and 100 PSI (1.4 – 6.9 bar).

Wheelchair accessible, complies with ANSI 117.1 and ADA.

Standard features:

- Waterways are lead-free in materials & construction
- Flexible one-piece water saver bubbler guard
- Stainless steel top and heavy-duty galvanized steel frame
- External stream height adjustment

Overall dimensions **18 ⁵/₈ x 18 ¹/₂ x 21 ³/₁₆"** (FB x LR x H)



CHILLED MODELS ONLY: Deliver 8.0 gph (30 Lph) of 50°F (10°C) water at 90°F (32°C) ambient and 80°F (27°C) inlet water per ASHRAE 18 testing. Fountain has external cold control adjustment and uses high efficiency cooling system and refrigerant R-134a.

MODEL	FOUNTAIN ACTIVATION	CHILLED	BOTTLE FILLER ACTIVATION	FILTRATION OPTION	CABINET FINISH	PRICE
KEP8ACSL-EBF-STN	Push pads		Contactless IR sensor	Optional: F041253-001	Brushed stainless steel	\$ 6,948
KEP8ACSL-EBF-GRY	Push pads		Contactless IR sensor	Optional: F041253-001	Greystone finish	\$ 6,866
KEP8ACSL-SBF-STN	Push pads		Push button	Optional: F041253-001	Brushed stainless steel	\$ 5,997
KEP8ACSL-SBF-GRY	Push pads		Push button	Optional: F041253-001	Greystone finish	\$ 5,678
KEPACSL-EBF-STN	Push pads		Contactless IR sensor	Optional: F041253-001	Brushed stainless steel	\$ 5,182
KEPACSL-EBF-GRY	Push pads		Contactless IR sensor	Optional: F041253-001	Greystone finish	\$ 4,456
KEPACSL-SBF-STN	Push pads		Push button	Optional: F041253-001	Brushed stainless steel	\$ 5,117
KEPACSL-SBF-GRY	Push pads		Push button	Optional: F041253-001	Greystone finish	\$ 4,258

All products comply with all known Plumbing codes, are listed by Underwriters' Laboratories (UL) to U.S. and Canadian standard, are certified to NSF/ANSI Standard 61, NSF/ANSI Standard 372, and are lead free.

Tilt 'n Tether System



2 minutes to change the filter

Filtration unit located behind the bottle filler makes filter changes quick and easy. Get it done in two minutes or less! An automatic shut-off valve inside the head engages when a filter is removed or installed.

Versafilter III

A flexible water treatment that effectively reduces chlorine, odours, cysts, and lead. It also improves the taste and appearance of drinking water.

Tilt 'n Tether system

The factory-installed tethering system allows for secure filtration changes. The tether holds the front of the bottle filler unit in place while you change the filtration canister.

Drinking water you can trust



Deliver safe, refreshing drinking water with Franke fountains and bottle fillers. Add the convenience of chilled drinking water for everyone in your facility.

Reduce the cost and waste associated with disposable water bottles and provide great tasting water on-demand. Bottle fillers reduce plastic bottle waste, save consumers money, and offer convenient drinking water in high-traffic areas.

Want to modernize your facility on a tight budget?
Retrofit. Franke offers a range of retrofit models of bottle fillers that are quick and easy to install and cost less than full replacement.




Components are lead free.
Products certified to NSF/ANSI Standard 51G & 372. Significantly more water and energy efficient.

Universal drinking fountain



Model KEP8ACT-GRY shown

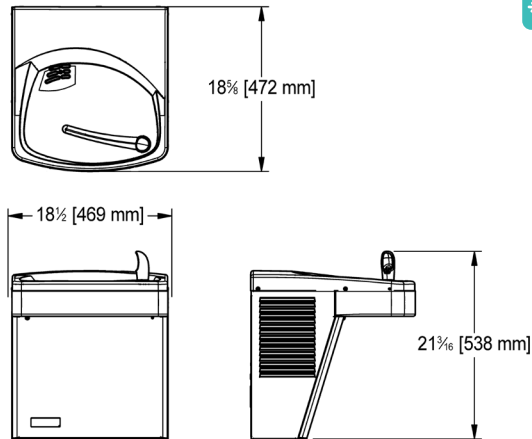

Universal drinking fountain



Universal wall mounted drinking fountain. Basin is designed to eliminate splashing and standing water. Water saver bubbler reduces wasted water by 50% and has a flexible guard and that operates between 20 and 100 PSI (1.4 – 6.9 bar). Complies with ANSI 117.1 and ADA.

- Standard features:
- Waterways are lead-free in materials & construction
 - Flexible one-piece water saver bubbler guard
 - Stainless steel top and heavy-duty galvanized steel frame
 - External stream height adjustment

Overall dimensions **18 5/8 x 18 1/2 x 21 3/16"** (FB x LR x H)



CHILLED MODELS ONLY: Deliver 8.0 gph (30 Lph) of 50°F (10°C) water at 90°F (32°C) ambient and 80°F (27°C) inlet water per ASHRAE 18 testing. Fountain has external cold control adjustment and uses high efficiency cooling system and refrigerant R-134a.

MODEL	FOUNTAIN ACTIVATION	CHILLED	FILTRATION OPTION	CABINET FINISH	PRICE
KEP8ACT-STN	Contactless IR sensor		Optional: F041253-001	Brushed stainless steel	\$ 4,826
KEP8ACT-GRY	Contactless IR sensor		Optional: F041253-001	Greystone finish	\$ 3,738
KEP8AC-STN	Push pads		Optional: F041253-001	Brushed stainless steel	\$ 2,191
KEPAC-STN	Push pads		Optional: F041253-001	Brushed stainless steel	\$ 1,881
KEPAC-GRY	Push pads		Optional: F041253-001	Greystone finish	\$ 1,646



Universal retrofit kit to convert push pad to sensor activated, single fountain KE041208-101

Contactless Conversion Kit and converts an existing KEPAC series drinking fountain into a contactless unit with hands-free water activation by eliminating the front and side push-bars.

- Features:
- Easily converts manual units to contactless in just minutes.
 - Stainless universal conversion kits are compatible with all powder coat finishes.
 - Compatible with KEPAC models dating back to 2005.
 - All necessary components are included in one kit; no wiring required.


\$1,172

All products comply with all known Plumbing codes, are listed by Underwriters' Laboratories (UL) to U.S. and Canadian standard, are certified to NSF/ANSI Standard 61, NSF/ANSI Standard 372, and are lead free.

Universal drinking fountain



Model KEP8ACSL-GRY shown

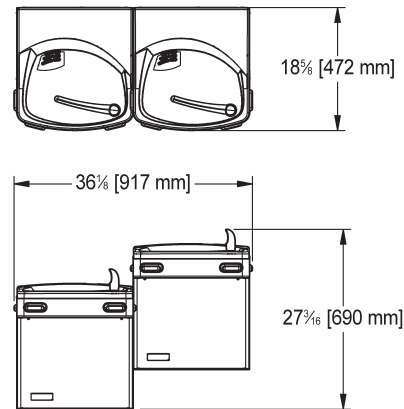

Universal split-level drinking fountain

Universal split-level wall mounted drinking fountain. Basin is designed to eliminate splashing and standing water. Water saver bubbler reduces wasted water by 50% and has a flexible guard and that operates between 20 and 100 PSI (1.4 – 6.9 bar). Complies with ANSI 117.1 and ADA.

Standard features:

- Waterways are lead-free in materials & construction
- Flexible one-piece water saver bubbler guard
- Stainless steel top and heavy-duty galvanized steel frame
- External stream height adjustment

Overall dimensions **18 5/8 x 18 1/2 x 27 3/16"** (FB x LR x H)



CHILLED MODELS ONLY: Deliver 8.0 gph (30 Lph) of 50°F (10°C) water at 90°F (32°C) ambient and 80°F (27°C) inlet water per ASHRAE 18 testing. Fountains have external cold control adjustment and use high efficiency cooling system and refrigerant R-134a.

MODEL	FOUNTAINS ACTIVATION	CHILLED	FILTRATION OPTION	CABINET FINISH	PRICE
KEP8ACSLT-STN	Contactless IR sensor		Optional: F041253-001	Brushed stainless steel	\$ 8,460
KEP8ACSLT-GRY	Contactless IR sensor		Optional: F041253-001	Greystone finish	\$ 8,070
KEP8ACSL-STN	Push pads		Optional: F041253-001	Brushed stainless steel	\$ 3,922
KEP8ACSL-GRY	Push pads		Optional: F041253-001	Greystone finish	\$ 3,641
KEPACSL-GRY	Push pads		Optional: F041253-001	Greystone finish	\$ 2,222



Universal retrofit kit to convert push pad to sensor activated, split-level fountain

KE041208-301

Double conversion kit for split-level drinking fountains. Contactless Conversion Kit and converts an existing KEPACSL series drinking fountain into contactless units with hands-free water activation by eliminating the front and side push-bars.

\$ 3,090

Universal drinking fountains, vandal-resistant models




Universal, vandal-resistant drinking fountain, chilled KEPV8AC-STN



Universal chilled drinking fountain. Waterways are lead-free in materials and construction. Drinking fountains have built-in 100 micron strainers which stop particles before they enter the waterway. Stainless steel top with a one piece, low flow, tamper proof flexible bubbler. Heavy duty galvanized steel frame. 8 gph chiller, vandal resistant push button, no external stream height adjustment, stainless steel cabinet.

Overall dimensions **18⁵/₈ x 17⁵/₈ x 21³/₁₆"** (FB x LR x H)

\$ 3,171

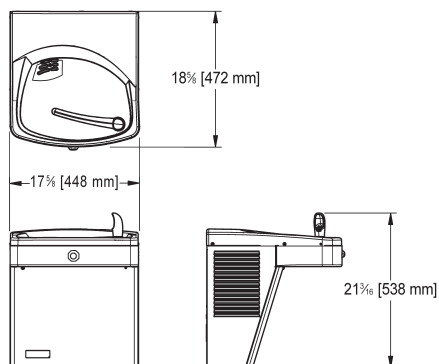


Universal, vandal-resistant split level drinking fountain, chilled KEPV8ACSL-STN



Universal non-chilled drinking fountain. Waterways are lead-free in materials and construction. Drinking fountains have built-in 100 micron strainers which stop particles before they enter the waterway. Stainless steel top with a one piece, low flow, tamper proof flexible bubbler. Heavy duty galvanized steel frame. 8 gph chiller, vandal resistant push button, no external stream height adjustment, stainless steel cabinet.

Overall dimensions **18⁵/₈ x 35¹/₄ x 27³/₁₆"** (FB x LR x H)

\$ 4,940



Universal split-level drinking fountain, chilled, stainless steel cabinet KEPV8ACSL-14G



Ultra vandal-resistant 14 gauge stainless steel cabinet.

\$ 9,618

All products comply with all known Plumbing codes, are listed by Underwriters' Laboratories (UL) to U.S. and Canadian standard, are certified to NSF/ANSI Standard 61, NSF/ANSI Standard 372, and are lead free.

Classic series drinking fountains



Chilled, floor mount drinking fountain, 3 gph chiller KEP3CP-GRY



Free standing chilled drinking fountain. Waterways are lead-free in materials and construction. Stainless steel top with heavy gauge steel frame in graystone finish. High-efficiency cooling tank and coil. Dial-a-drink bubbler.



3 gallons per hour chiller.

Overall dimensions **12 5/8 x 12 1/8 x 44"** (FB x LR x H)



\$ 2,416

Chilled, floor mount drinking fountain, 5 gph chiller KEP5CP-GRY


5 gallons per hour chiller option for model above.

\$ 2,522

Chilled, floor mount drinking fountain, 10 gph chiller KEP10CP-GRY

10 gallons per hour chiller option for model above.

\$ 2,731



Chilled, drinking fountain with stainless steel cabinet



KEM8SBPM-STN




Chilled, push button drinking fountain with stainless steel cabinet fountain. Heavy duty galvanized steel wall mounting frame with brushed stainless panels. Waterways are lead-free in materials and construction. Built-in 100 micron strainer stops particles before they enter the waterway. Free flow bubbler.




Overall dimensions

19 9/16 x 19 3/4 x 40 13/16" (FB x LR x H)

\$ 6,034

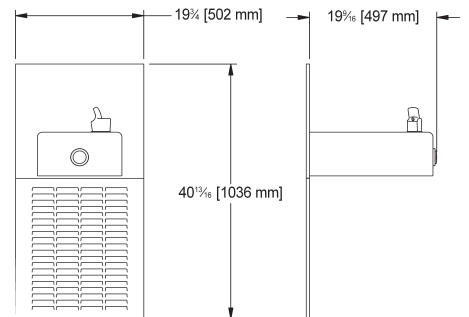

Classic series drinking fountains



Non-chilled, wall mount drinking fountain with anti-splash ridge



KEF100-STN

Wall mounted non-chilled drinking fountain with stainless steel cabinet and dial-a-drink bubbler. Anti-splash ridge. Waterways are lead-free in materials and construction. Easy to clean integral strainer grid. Stainless steel top with heavy gauge steel frame.

Overall dimensions

13 x 17 x 11¹³/₁₆" (FB x LR x H)

\$ 1,376



Non-chilled, wall mount drinking fountain

KEF110PM-STN



Wall mounted non-chilled drinking fountain with vandal resistant push button.

Waterways are lead-free in materials and construction. Stainless steel top with heavy gauge steel frame.

Overall dimensions

14¹/₈ x 13 x 10¹⁵/₁₆" (FB x LR x H)

\$ 2,603



All products comply with all known Plumbing codes, are listed by Underwriters' Laboratories (UL) to U.S. and Canadian standard, are certified to NSF/ANSI Standard 61, NSF/ANSI Standard 372, and are lead free.

Drinking fountains - remote chillers






Under-cabinet remote chiller KER1P



Powder coated galvanized steel cabinet with plastic front. Chiller is air cooled and designed to fit under a sink. Stainless steel cabinet storage tank and waterways. 1/4" OD water tube connection. Chills 0.8 gallons per hour. HFC refrigerant R-134a. Dial on front of unit allows control of water temperature.
Overall dimensions
8 13/16 x 10 1/2 x 14 11/16" (FB x LR x H)

\$ 1,620






Remote chiller for drinking fountains, 5 gallons per hour capacity



KER5
May be used to supply up to two drinking fountains. Galvanized steel cabinet. Chiller is air cooled and is designed for remote installation. Stainless steel cabinet storage tank. 1/4" OD stainless steel water tube connections. Refrigerant R-134a. 5 gph commercial grade chiller.
Overall dimensions
16 5/8 x 8 1/4 x 16 1/4" (FB x LR x H)

\$ 2,166





Remote chiller for drinking fountains, 8 gallons per hour capacity



KER8
May be used to supply up to two drinking fountains. Galvanized steel cabinet. Chiller is air cooled and is designed for remote installation. Stainless steel cabinet storage tank. 1/4" OD stainless steel water tube connections. Refrigerant R-134a. 8 gph commercial grade chiller.
Overall dimensions
16 3/8 x 10 3/8 x 16 9/16" (FB x LR x H)

\$ 2,715





Remote chiller for drinking fountains, 12 gallons per hour capacity



KER12
May be used to supply up to two drinking fountains. Galvanized steel cabinet. Chiller is air cooled and is designed for remote installation. Stainless steel cabinet storage tank. 1/4" OD stainless steel water tube connections. Refrigerant R-134a. 12 gph commercial grade chiller.
Overall dimensions
16 3/8 x 10 3/8 x 16 9/16" (FB x LR x H)

\$ 3,082



VersaFilter III

Filtration



Deliver great tasting water through point of use filtration.

Tilt 'n Tether system makes filter changes quick & easy

- Change filter behind the bottle filler unit
- The tether holds the unit in place and gives access to the filter
- Automatic shut-off valve inside the head engages when filter is inserted or removed

Improve the taste and appearance of drinking water

- Reduces the levels of lead, cysts, chlorine, and particulates
- Drinking water that is virtually free of sediment, rust, and dirt

Upgrade to cleaner water in schools, offices, airports and gyms

- High performance filtration means fewer filter changes per year
- Reduce the risk of lead exposure through drinking water with point of use filtration

Cartridge F041145-001, when used in the VersaFilter III system is tested and certified by IAPMO R&T Lab and IAPMO R&T against NSF/ANSI 42 for the reduction of Chlorine, Taste and Odour and Particulate Class I; NSF/ANSI 53 for the reduction of Cyst and Lead; as verified and substantiated by test data.

Drinking fountain filtration



VersaFilter III bottle filler filtration

The VersaFilter III bottle filler filtration kit is certified to NSF/ANSI 42 and 53 for lead, Particulate Class I, chlorine, taste and odour reduction to 18,000 litres (4,750 gallons). Automatic shut-off valve inside the filter allows you to unscrew the old filter and install the new one in under two minutes.

Franke bottle filler has unique Tilt 'n Tether system to make it quick and easy to change the filter. Kit includes metal mounting bracket, 1 filter cartridge, tubing, and quick connect fittings.

F041253-001
\$ 484

VersaFilter III kit. Complete filter kit for Universal style drinking fountains as well as EBF and SBF bottle filler models.

VersaFilter III kit is available **factory-installed** on these models below:

KEPWEBFF
KEPWSBFF
KEP8ACT-EBFF-GRY
KEP8ACT-EBFF-STN
KEP8AC-SBFF-GRY
KEP8AC-SBFF-STN

F041145-001
\$ 274

Replacement VersaFilter III filter.



Galaxi replacement filter for drinking fountains purchased prior to 2023

The Galaxi® drinking fountain filter provides optimum filtration of chlorine, bad taste, odour, lead, sediment and cysts. The activated carbon with a cellulose-free synthetic fiber matrix performs as a sediment filter and a carbon block. It selectively removes dangerous contaminants from drinking water while maintaining water pH balance. Reduces chlorine and articles in accordance with ANSI/NSF STD 42. Reduces cysts and lead in accordance with ANSI/NSF STD 53. Additional phosphate beads inhibit scale for hard water and hot water applications. No carbon fines are released into the water stream.

F037116-101
\$ 274

Drinking fountain replacement parts



Bubbler replacement parts
030774-006
Dial-a-drink plastic bubbler.
\$ 439



Bubbler replacement parts
032799-005
One piece bubbler with flexible bubbler guard, regulated, for KEP-series.
\$ 321



Bubbler replacement parts
035607-108
One piece flexible bubbler valve, non-regulated, for KEPAC-series.
\$ 160

Drain Parts & Fittings



Pictured: 1140G grid accessory installed on 1140 strainer assembly

3 1/2" (89 mm) waste fittings



Stainless steel basket strainer 1140

3 1/2" (89 mm) all metal basket strainer assembly. Type 304 stainless steel construction complete with 1 1/2" x 3" (38 x 76 mm) stainless steel tailpiece. Pull up crumb cup. Certified to ASME A112.18.2-2005/CSA B125.2-2005.

\$ 50



Stainless steel grid strainer accessory, type 316, vandal-resistant 1140G

Grid accessory for 3 1/2" (89 mm) basket strainer. Replaces crumb cup on 1140, 1140F-316 or the 1120-316 waste assembly to create a vandal-resistant grid waste assembly. Type 316 stainless steel construction. Certified to ASME A112.18.2-2005/CSA B125.2-2005.

\$ 46



Stainless steel basket strainer, type 316 1140F-316

3 1/2" (89 mm) basket strainer in type 316 stainless steel construction, with 1 1/2" x 3" (38 x 76 mm) Type 316 stainless steel tailpiece. Pull up crumb cup. Certified to ASME A112.18.2-2005/CSA B125.2-2005.

\$ 95

1 1/2" (38 mm) waste fittings



Duplex waste with rubber stopper 100

1 1/2" (38 mm) DN38 duplex stainless steel waste complete with 1 1/2 x 3" (38 x 76 mm) brass tailpiece. Rubber stopper with pull up ring.

\$ 28



Duplex waste in type 316 stainless steel with rubber stopper 200-316

1 1/2" (38 mm) DN38 duplex type 316 stainless steel waste complete with 1 1/2 x 3" (38 x 76 mm) type 316 stainless steel tailpiece. Rubber stopper with pull up ring.

\$ 83



Stainless steel grid strainer 100-NR

1 1/2" (38 mm) vandal-resistant grid waste fitting, type 302 stainless steel, complete with with 1 1/2 x 3" (38 x 76 mm) stainless steel tailpiece.

\$ 204



Integral waste assembly, type 316 1047

1 1/2" (38 mm) integral waste assembly. Complete with type 316 stainless steel shank, shank gasket, brass shank nut, brass tailpiece nut, and nylon tailpiece gasket.

\$ 41



Integral waste cover for 1 1/2" (38mm) drain 100-1-302

1 1/2" (38 mm) perforated stainless steel grid waste cover for 1 1/2" drain.

\$ 37



Stainless steel standpipe, 10" long 310-1

Standpipe for 1 1/2" (38 mm) waste in type 304 stainless steel. 10" (254 mm) long.

\$ 75

1 1/4" (32 mm) waste fittings



Grid strainer with overflow
3700

1 1/4" (32 mm) grid strainer with overflow and removable tailpiece. Certified to ASME A112.18.2-2005/CSA B125.2-2005.

\$ 78



Grid strainer no overflow
3719

1 1/4" (32 mm) grid strainer with removable tailpiece. Certified to ASME A112.18.2-2005/CSA B125.2-2005.

\$ 78

Drain Parts & Fittings



Type 316 stainless steel tailpiece
315-9-316

1 1/2 x 3" (38 x 76 mm) type 316 stainless steel tailpiece.

\$ 38



Specialty waste fitting, drain cover
WHB5222-PW

Replacement stainless steel pyramid-shaped waste cover for WHB5222-7 basin.

\$ 118



Overflow kit for laundry sinks
OF100

Components for laundry sink overflow assembly, 3 1/2" (89 mm) waste size.

\$ 67

Overflow replacement parts



Chrome finish overflow elbow

21020

2 ⁵/₈ x 1 ¹/₄" (67 x 32 mm) elbow with flat washer. For use with vanity basin models with overflow: WT400C-8, WT500C-8, WT600C-8, OV1420U-5, OV1619-5, OV1317U-5, OV1418-6, OV17-5, OV17-6.

\$ 6



Chrome finish overflow collar

21021

3 ³/₁₆ x 2 ¹/₄" (81 x 54 mm) overflow collar. For use with vanity basin models with overflow: WT400C-8, WT500C-8, WT600C-8, OV1420U-5, OV1619-5, OV1317U-5, OV1418-6, OV17-5, OV17-6.

\$ 5



Overflow tubes, stainless steel, various lengths

21100

10" (254 mm) for OV17-6 vanity basin.

\$ 29

21105

10 ¹/₂" (267 mm) for OWB1420U-5 undermount sink, OV1821-6 vanity basin.

\$ 30

21110

11" (279 mm) for OV1418-6 and OV1419-6 vanity basins.

\$ 30

21600

6" (152 mm) for OV1420U-5, OV1317U-5 vanity basins.

\$ 19

21650

6 ¹/₂" (165 mm) for OV1420U-5 vanity basin.

\$ 23

21750

7 ¹/₂" (190 mm) for OV17-5 vanity basin, WT400C-8, WT500C-8, AND WT600C-8 wall hung basins.

\$ 25

21850

8 ¹/₂" (216 mm) for OWB1119U-5 undermount sink.

\$ 25

High Security



Franke is the exclusive Canadian distributor for I-CON systems

Custom solutions for retrofit and new construction

Correctional facilities across Canada trust I-CON systems to deliver reliable, tailor-made solutions. Call Franke Commercial for a quote: 855-446-5663.

As much as 90% savings in parts replacement and labour

Simple yet robust valves, sensors, solenoids mean fewer parts to keep on hand. Find out how much you can save with a free, no-obligation quote.

Up to 70% water savings with an I-CON system installation

Saving water is good for the environment and good for your bottom line. Want to know how much you can save? Email us today, commercial-info.ca@franke.com.

Get started with I-CON for your facility retrofit

Start with one cell, or one block. We work with your facility's existing systems to provide the equipment you need to start saving on water, maintenance, and parts.

Stainless steel fixtures for prisons, jails, and detention facilities



Lavatory-toilet combination fixture

Combination lavatory sink with various sizes of toilets. Anti-ligature model available. Toilet features blowout flushing action. Wheelchair accessible model has integrated grab bars and withstands up to 5,000 lbs loading.



Lavatories

Stainless steel oval or rectangular shaped basins with backsplash. Customize the controls to the needs of your facility.



Stainless steel toilets

Floor mount or wall mount models with either siphon jet or blowout operation. Self-draining flushing rim. Fully enclosed trap. Optional top or back supply.



Shower panels & cabinets

Stainless steel shower panels with vandal-resistant shower head. Cabinet showers available in different sizes. Slip-resistant floor.



Urinals

Wall hung urinals with washdown action. Straddle model available. Optional back or top supply.



TruTOUCH® touch sensors

Stainless steel vandal-resistant construction with no moving parts. Available with or without LED status indicator.

Intelligent water conservation by I-CON



ENVISAGE® water management software

Manage your facility with complete control over all inmate water usage. Log and monitor plumbing usage in real time. Restrict plumbing usage from individual cell fixtures to the entire facility with the tap of a finger. For safer, more efficient inspections, lockdowns, and extractions. Envisage® features an intuitive graphic interface with a map of your facility and touchscreen interface for each cell.

NEXUS® Controllers

The NEXUS® system of controllers can operate as standalone units or as part of the ENVISAGE® water management network in your facility. Stay in complete control of your plumbing system. Options include wired or wireless communication, AC or battery power.



Electronic valve system

I-CON's electronic valve system ensures accuracy, performance, and longevity in high grade materials designed to outlast the competition. Flush valves, lavatory valves, and shower valves that operate without diaphragms. Maximum water savings and minimal maintenance costs.

Each application has its own unique needs for fixtures, valves, sensors, solenoids, and systems.
Call for a quote: 855-446-5663 or email us at commercial-info.ca@franke.com.

Custom solutions



Full custom fabrication capabilities: No minimum order

Franke Commercial will custom fabricate products to meet our customers' exact specifications. Modifications can be made to most of our standard catalogue products.

All our custom fabricated products are polished to a #4 satin finish and can be made to meet the material specification you require (T304 or T316, 14 to 18 gauge). Continuous weld construction is available for pharmaceutical applications, if required.

Contact us for a quote:

- Countertops
- Topmount & Undermount Sinks
- Drainboard Sinks
- Scullery Sinks
- Wall Mount Hand Wash Stations
- Surgical Scrub Stations
- Mop Sinks
- Wall Mounted Utility Sinks



Some customers require a sink, basin, or countertop that is different from our catalog offering. This is why Franke Commercial is proud to offer custom stainless steel solutions for our customers. If you can sketch it, we can build it using our decades of experience and the quality you expect from Franke.



It starts with a sheet of stainless steel

We will cut, form, weld and finish it to your exact specifications. Give us the material specifications, written spec or drawing, and Franke will deliver a certified high-quality product.

Sinks with integrated countertops

Tops are available in any size and length.
Sink bowl welded into countertop.



Custom-sized sinks

We have worked with architects, designers, and engineers for decades to bring their unique designs to life.

Scullery & utility

Tailor made bowl size, height, backsplash style, drainboards, and sink edge types.

Healthcare & pharmaceutical




Continuous weld construction available upon specification. Custom made products that meet or exceed national healthcare standards.

Get a quote within 48hrs




Delivered from our Canadian facility in 8 to 10 weeks' time. Need it faster? Email us at: commercial-info.ca@franke.com

Standard hole drillings for topmount stainless steel sinks



Single bowl



Double bowl



Triple bowl

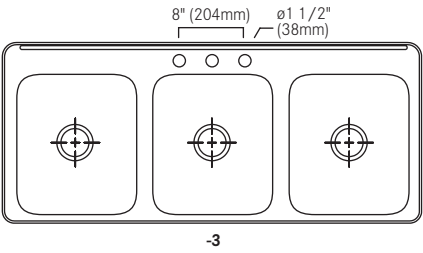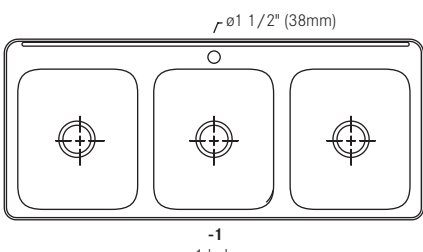

Care & Maintenance for Stainless Steel Sinks

WHAT TO DO

Brushes with natural or plastic bristles, cotton or synthetic or micro fibre clothes, leather, sponges, pressure washer, vapour stream cleaner, toothpaste, household and window-cleaning products and natural cleaning substances like diluted vinegar (20 % vinegar / 80 % water) are ideal for cleaning stainless steel.

The best form of maintenance is frequent, regular cleanings. The best method of preventative maintenance is to ensure that the fixture is clean, dry and exposed to room atmosphere when not in use. Rinse and towel dry the fixtures daily in order to minimize major cleanups. This is of particular importance if potentially corrosive chemicals have been used.

Keep the fixture free of any standing water, which may build up mineral deposits. The quality of your water can affect the appearance and this water quality will vary from building to building.

To clean your stainless product, use the mildest cleaning procedure that will do the job effectively. On mirror finish (shiny) products we recommend using either a liquid detergent or Peek™ with a soft cloth. **DO NOT USE ABRASIVE MATERIALS ON THE MIRROR FINISH.** On satin (matte) finishes and/or inside sink bowls we recommend using a very mild abrasive cleanser such as Old Dutch® or Cameo®.


Any cleaning or scrubbing to remove stubborn stains should follow the direction of the grain line. Any scrubbing across the grain will show as a scratch. Scrubbing in the same direction as the polish lines will blend in any surface scratch. We recommend that Scotch-Brite® pads be used only on satin finishes.

Stains and water spots anywhere on the product can be removed with a small amount of Peek™ on a damp cloth. Rub Peek™ over the surface. Always rinse after using a cleaning agent, and wipe dry to discourage any water spotting.

WHAT NOT TO DO

We recommend that you do not use chlorine bleach to clean stainless steel, as chlorine will attack the protective layer that makes stainless steel truly stainless. The risk of damage is proportional to the concentration of the chlorine and the duration of exposure between the fixture and chlorine agent. Always dilute any antibacterial product used and wipe up any spills. Note: some antibacterial soaps contain a chlorine compound.

The unique properties of stainless steel are dependent upon exposure of the surface to the atmosphere. Do not leave any utensils in a sink overnight, as they will trap water underneath or leave a residue of small iron particles which could lead to staining and discoloration of the surface. They may not even be readily visible, but they most certainly will lead to corrosion. Any signs of rust can be removed with non-metallic Scotch-Brite® scouring pads, but do not scrub across the grain. For similar reasons do not leave any mild steel, or cast iron cookware or implements, anywhere on a stainless steel surface for extended periods of time. Steel wool, metallic scouring pads, abrasive, grinding and polishing powder as well as sand paper should never be used on a stainless steel surface as they can damage or scratch it.

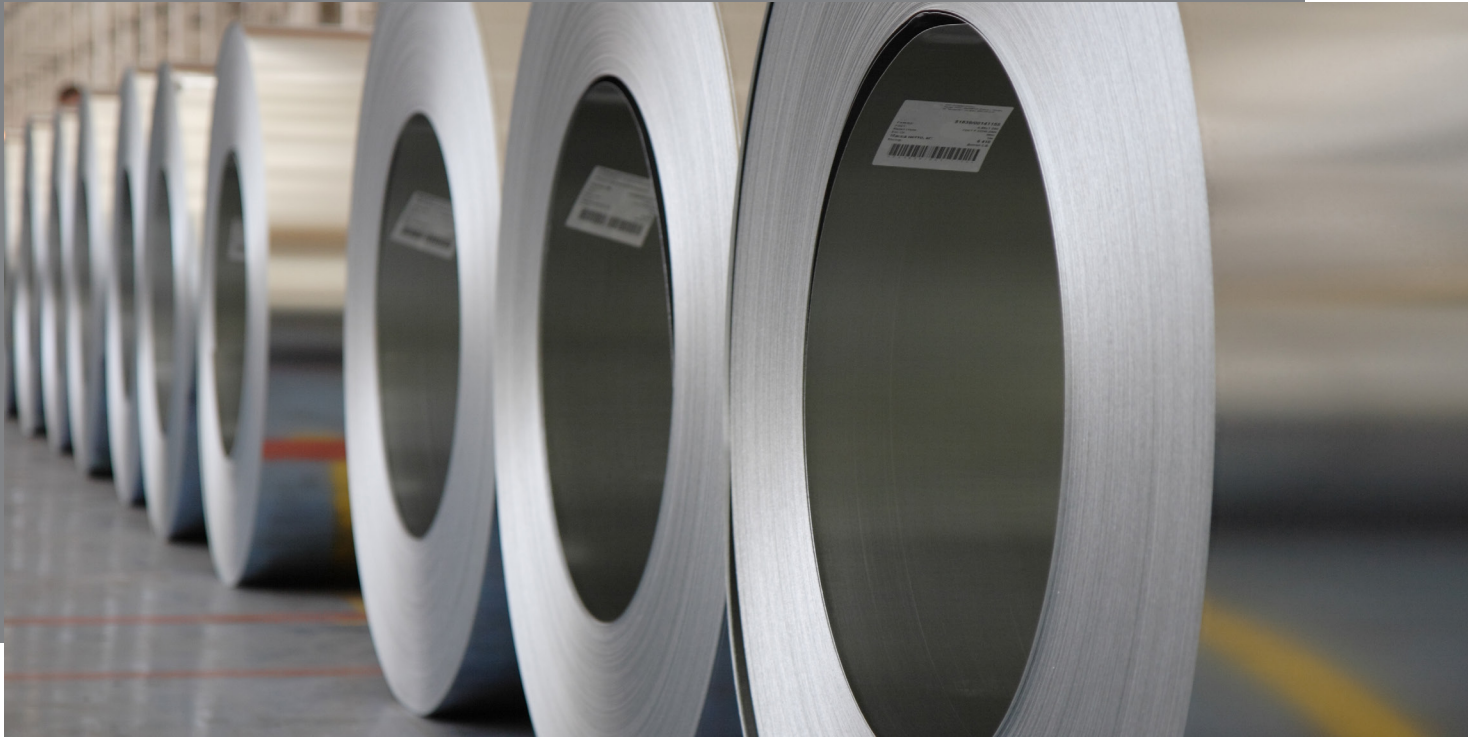

STAINLESS STEEL CORROSION RESISTANCE

20 GAUGE

18-8 stainless steel, Type 301

A good quality steel with 18% chromium and 8% nickel content. This type of stainless steel is typically used for sinks that are 8" deep or less.

18 GAUGE

18-10 stainless steel, Type 304

A heavier weight stainless with 18% chromium, and 10% nickel. This type of stainless steel is optimal for manufacturing deeper sink bowls.

16 & 14 GAUGE

Type 304

Most often used in fabrication of institutional sinks such as kitchen sculleries, wallmount utility sinks, as well as mop and service sinks.

BOWL AND DECK FINISHES

With the exception of vanity basins, the Franke Commercial sink bowls have a #4 satin finish. A satin finish has a noticeable grain line on the inside of the bowl. This type of finish is practical, particularly in a heavy use application, as any scratches may be blended into the grain line.

The #4 satin finish deck will stand up to the rigours of time and repeated use, and the natural grain of the steel will disguise any scratches acquired from use.



Stainless steel corrosion resistance information

Substance, Conditions, Strength and Temperature	T316	T304	T302
Acetic Anhydride (90%, aerated, 180 degrees F)	B	C	C
Aluminum Fluoride (5%, 70 degrees F)	B	C	C
Aluminum Sulfate (10%, boiling)	A	B	B
Ammonium Bromide (5%, 70 degrees F)	B	C	C
Ammonium Sulfate (10%, boiling)	A	B	B
Bleaching Powder (dry)	A	C	C
Butyric Acid (saturated, boiling)	A	B	B
Calcium Bisulfite (aqueous solution, 300 lbs. pressure, 390 degrees F)	B	C	C
Calcium Hydroxide (50%, boiling)	B	C	C
Calcium Hypochlorite (saturated, 70 degrees F)	A	C	C
Chloracetic Acid (70 degrees F)	B	C	C
Chlorine Gas (moist, 70 degrees F)	B	C	C
Chromic Acid (50%, boiling)	B	C	C
Ferric Chloride 1%, 70 degrees F)	B	C	C
Fluosilicic Acid 90%, 70 degrees F)	B	C	C
Formic Acid (10%, 180 degrees F)	A	C	C
Hydrochloric Acid (1% or less, 70 degrees F)	B	C	C
Iodine (dry, 70 degrees F)	A	C	C
Lactic Acid (10%, 150 degrees F)	B	C	C
Mercuric Chloride (2%, 70 degrees F)	B	C	C
Oxalic Acid (2.5%, 180 degrees F)	A	C	C
Phosphoric Acid (80%, 230 degrees F)	B	C	C
Salt Brine (70 degrees F)	A	C	C
Sauerkraut Brine (70 degrees F)	A	C	C
Sodium Hydroxide (melting, 600 degrees F)	B	C	C
Stannic Chloride (5%, 70 degrees F)	B	C	C
Sulfuric Acid (5%, 100 degrees F)	A	C	C
Zinc Chloride (saturated, 70 degrees F)	B	C	C

CHEMICAL DATA

A = fully resistant, **B** = fairly resistant, **C** = not resistant.
The chemical data above should be used as a guide to determine the type of stainless steel that will be appropriate for the application.

The rating system denotes the level of resistance to corrosion for the different types of stainless steel. For applications involving chemicals or conditions not listed, please consult Franke Commercial customer service.

Corrosion, or rusting, often reported soon after installation, has two main causes:

1. Contact Corrosion occurs when a piece of common carbon steel, copper, brass or other foreign material contacts the sink and destroys the passive protective film.
2. Pitting or Pinhole Corrosion occurs when chlorides attack the steel forming pits where galvanic cells are created. Acid chlorides are particularly severe, but even chlorine bleach can cause failure. The sink should be rinsed thoroughly after such contact. Type 316 steel should be specified if the sink will be subject to such conditions.

In the presence of oxygen, stainless steel forms a protective chromium oxide layer. This is due to the addition of chromium in excess of 11.5% during the alloying stage. The further addition of nickel, in excess of 7%, gives superior corrosion resistance to the 300 series.

Maximum corrosion resistance is obtained with the addition of molybdenum to form TYPE 316, designed to resist attack under highly corrosive conditions.



As implied, stainless steel requires oxygen in order to be stainless. There are ways to make oxygen more plentiful. For example, an acid solution which might otherwise corrode the steel, can be aerated to maintain the protective film.

100.....	99.....	\$28	ALHS7306P-1.....	15.....	\$977	IWC2104.....	51.....	\$498
1047.....	99.....	\$41	ALRS4606P-1.....	14.....	\$705	IWC2203.....	59.....	\$472
1140.....	98.....	\$50	ART36-1.....	14.....	\$2,276	LBD0814P-1.....	10.....	\$4,890
3700.....	100.....	\$78	ART36-316-1.....	21.....	\$3,744	LBD1308P-1.....	10.....	\$1,128
3719.....	100.....	\$78	ART36-316-3C.....	21.....	\$3,744	LBD4408P-1.....	10.....	\$1,324
21020.....	101.....	\$6	ART48-1.....	14.....	\$2,537	LBD4410P-1.....	10.....	\$1,741
21021.....	101.....	\$5	ART48-316-1.....	21.....	\$4,114	LBD6407-1.....	9.....	\$626
21100.....	101.....	\$29	ART48-316-3C.....	21.....	\$4,114	LBD6408-1.....	9.....	\$754
21105.....	101.....	\$30	ART60-1.....	14.....	\$3,016	LBD6408-316P-1.....	19.....	\$1,958
21110.....	101.....	\$30	ART60-316-1.....	21.....	\$4,478	LBD6408P-1.....	10.....	\$1,078
21600.....	101.....	\$19	ART60-316-3C.....	21.....	\$4,478	LBD6410-316PCB-1.....	19.....	\$2,223
21650.....	101.....	\$23	AS6105P-1.....	4.....	\$821	LBD6410PCB-1.....	10.....	\$1,549
21750.....	101.....	\$25	AT02-005AC.....	71.....	\$1,574	LBD6808-1.....	9.....	\$1,012
21850.....	101.....	\$25	AT02-005DC.....	71.....	\$1,641	LBD7310P-1.....	10.....	\$2,673
100-1-302.....	99.....	\$37	AWHB1414P-7MOD..	59.....	\$7,847	LBD7508-1.....	9.....	\$1,031
100-NR.....	99.....	\$204	AWHB2220W-3-1.....	63.....	\$1,493	LBD7508P-1.....	10.....	\$1,508
1140F-316.....	98.....	\$95	AWHBS2419-7.....	62.....	\$1,876	LBD7510P-1.....	10.....	\$1,999
1140G.....	98.....	\$46	CL-DB.....	31.....	\$1,431	LBDDBL6408P-1.....	13.....	\$4,423
200-316.....	99.....	\$83	CM-16104.....	73.....	\$485	LBDDBR6408P-1.....	13.....	\$4,423
310-1.....	99.....	\$75	CM-16104-WM.....	73.....	\$485	LBS1306-1.....	5.....	\$408
315-9-316.....	100.....	\$38	D0814P-1.....	8.....	\$4,639	LBS1308P-1.....	6.....	\$766
AHWSS1720W-00.....	52.....	\$2,255	D6408-1.....	8.....	\$711	LBS2708-1.....	5.....	\$495
AHWSS1720W-G.....	53.....	\$2,475	D6410-316PCB-1.....	19.....	\$2,184	LBS2708P-1.....	6.....	\$863
AHWSS1720W-T.....	54.....	\$2,541	DL2448-1.....	30.....	\$5,576	LBS4008P-1.....	6.....	\$932
ALBD4405P-1.....	10.....	\$1,286	DL2448-5.....	30.....	\$5,917	LBS4010P-1.....	6.....	\$1,234
ALBD4406P-1.....	10.....	\$1,304	FSS151509-316-1.....	23.....	\$5,054	LBS4408P-1.....	6.....	\$830
ALBD6405-1.....	9.....	\$784	FSS151509-316-1.....	41.....	\$5,054	LBS4410P-1.....	6.....	\$1,136
ALBD6405P-1.....	10.....	\$1,045	FSS2210-316-1.....	24.....	\$10,834	LBS4607-1.....	5.....	\$595
ALBD6406P-1.....	10.....	\$1,062	FSS2210-316-1.....	41.....	\$10,834	LBS4607-316P-1.....	18.....	\$1,048
ALBD7506P-1.....	10.....	\$1,485	FSS22210-316-1.....	23.....	\$7,388	LBS4608P-1.....	6.....	\$648
ALBDC182605P-1.....	10.....	\$1,390	FSS22210-316-1.....	41.....	\$7,388	LBS4610-316P-1.....	18.....	\$1,273
ALBLRS7006P-1.....	14.....	\$978	FSSL223410-316-1.....	23.....	\$9,439	LBS4610P-1.....	6.....	\$893
ALBLS4606P-1.....	16.....	\$859	FSSL223410-316-1.....	41.....	\$9,439	LBS6108P-1.....	6.....	\$1,013
ALBLS7006P-1.....	16.....	\$901	FSSO2210-316-1.....	24.....	\$10,834	LBS6110P-1.....	6.....	\$1,280
ALBRS4606P-1.....	16.....	\$859	FSSO2210-316-1.....	41.....	\$10,834	LBS6407-316P-1.....	18.....	\$1,147
ALBRS7006P-1.....	16.....	\$901	FSSOL223410-316-1.....	24.....	\$11,112	LBS6408P-1.....	6.....	\$686
ALBS1306P-1.....	6.....	\$547	FSSOL223410-316-1.....	41.....	\$11,112	LBS6410PCB-1.....	6.....	\$877
ALBS2706P-1.....	6.....	\$850	FSSOR223410-316-1.....	24.....	\$11,112	LBS6807-1.....	5.....	\$363
ALBS4006P-1.....	6.....	\$914	FSSOR223410-316-1.....	41.....	\$11,112	LBS6807-2.....	5.....	\$412
ALBS4406P-1.....	6.....	\$810	FSSR223410-316-1.....	23.....	\$9,439	LBS6807-316P-1.....	18.....	\$1,134
ALBS4605P-1.....	6.....	\$820	FSSR223410-316-1.....	41.....	\$9,439	LBS6808-1.....	5.....	\$463
ALBS4606P-1.....	6.....	\$876	HHF180-6L.....	72.....	\$1,003	LBS6808-2.....	5.....	\$505
ALBS6106P-1.....	6.....	\$1,031	HHF180-6L-W.....	72.....	\$1,103	LBS6808-316P-1.....	18.....	\$1,234
ALBS6406P-1.....	6.....	\$907	HHF23T.....	72.....	\$972	LBS6808P-1.....	6.....	\$557
ALBS6805-1.....	5.....	\$553	HWF05.....	50.....	\$4,193	LBS6810-1.....	5.....	\$800
ALBS6805-316P-1.....	18.....	\$711	HWF23.....	50.....	\$4,238	LBS6810-316P-1.....	18.....	\$1,357
ALBS6805P-1.....	6.....	\$888	HWF43.....	50.....	\$4,469	LBS6810P-1.....	6.....	\$915
ALBS6806P-1.....	6.....	\$907	HWS0610P-3.....	60.....	\$956	LBS7008P-1.....	7.....	\$1,007
ALBS7006P-1.....	7.....	\$985	HWS1414P-00.....	58.....	\$2,917	LBS7308-1.....	5.....	\$741
ALBS7306P-1.....	7.....	\$1,031	HWS1420P-00.....	59.....	\$4,611	LBS7308P-1.....	7.....	\$1,051
ALBS7506P-1.....	7.....	\$841	HWS6810P-3.....	60.....	\$1,283	LBS7310P-1.....	7.....	\$1,350
ALBS7806P-1.....	7.....	\$1,241	HWS-RS-00.....	58.....	\$505	LBS7312P-1.....	7.....	\$1,553
ALHS4606P-1.....	15.....	\$705	HWSS1518P-00.....	58.....	\$2,750	LBS7314P-1.....	7.....	\$3,010
ALHS6406P-1.....	15.....	\$801	HWSS2321W-00.....	49.....	\$5,313	LBS7508-1.....	5.....	\$567

Index

LBS7508P-1.....	7.....	\$860
LBS7808P-1.....	7.....	\$1,257
LBS8014P-1.....	7.....	\$2,921
LBS9106-1.....	5.....	\$349
LBS9407-316P-1.....	18.....	\$815
LBSDBL6408P-1.....	13.....	\$3,455
LBSDBL6810-316P-1.....	20.....	\$4,429
LBSDBL6810P-1.....	13.....	\$3,557
LBSDBR6408P-1.....	13.....	\$3,455
LBSDBR6810-316P-1.....	20.....	\$4,429
LBSDBR6810P-1.....	13.....	\$3,557
LBT6407CB-1.....	11.....	\$1,562
LBT6410PCB-1.....	11.....	\$2,814
LBT8610P-1.....	11.....	\$3,338
LHS4608P-1.....	15.....	\$652
MEDI-MIX.....	51.....	\$386
MEDI-SHR.....	51.....	\$978
MIX-LF.....	71.....	\$348
MIX-LF.....	72.....	\$348
OC6-316.....	22.....	\$407
OF100.....	100.....	\$67
OV1317U-5.....	47.....	\$639
OV1418-6.....	43.....	\$448
OV1420U-5.....	47.....	\$703
OV1619-5-1.....	44.....	\$526
OV1619-5-3.....	44.....	\$526
OV1619-6-1.....	44.....	\$483
OV1619-6-3.....	44.....	\$483
OV17-5.....	43.....	\$519
OV17-6.....	43.....	\$454
OV1821-5-1.....	45.....	\$555
OV1821-5-3.....	45.....	\$555
OV1821-6-1.....	45.....	\$499
OV1821-6-3.....	45.....	\$499
OV18SR-6.....	47.....	\$448
OV18SR-7.....	47.....	\$448
OWB1119U-5.....	46.....	\$552
OWB1420U-5.....	46.....	\$754
RC6-316.....	22.....	\$412
RDL2436-1.....	36.....	\$8,335
RDL2436L-1.....	36.....	\$9,623
RDL2436LR-1.....	36.....	\$10,911
RDL2436R-1.....	36.....	\$9,623
RDL2448-1.....	36.....	\$8,979
RDL2448L-1.....	36.....	\$10,266
RDL2448LR-1.....	36.....	\$11,553
RDL2448R-1.....	36.....	\$10,266
RSL2418-1.....	35.....	\$5,471
RSL2418L-1.....	35.....	\$6,760
RSL2418LR-1.....	35.....	\$8,045
RSL2418R-1.....	35.....	\$6,760
RSL2424-1.....	35.....	\$5,760
RSL2424L-1.....	35.....	\$7,048
RSL2424LR-1.....	35.....	\$8,335

RSL2424R-1.....	35.....	\$7,048
RTL2454-1.....	37.....	\$12,842
RTL2454L-1.....	37.....	\$14,128
RTL2454LR-1.....	37.....	\$15,416
RTL2454R-1.....	37.....	\$14,128
RTL2472-1.....	37.....	\$13,487
RTL2472L-1.....	37.....	\$14,771
RTL2472LR-1.....	37.....	\$16,057
RTL2472R-1.....	37.....	\$14,771
S6407-316P-1.....	18.....	\$1,201
S6408-1.....	4.....	\$435
S6410PCB-1.....	4.....	\$772
S6808-1.....	4.....	\$451
S6808-316P-1.....	18.....	\$1,202
S6810-1.....	4.....	\$772
S6810-316P-1.....	18.....	\$1,527
S7308-1.....	4.....	\$697
S7314P-1.....	4.....	\$2,575
S8014P-1.....	4.....	\$2,620
S9106-1.....	4.....	\$349
S9407-316P-1.....	18.....	\$744
SD01-001CFL.....	74.....	\$907
SD01-001CFL-MF.....	75.....	\$788
SD01-001SFL.....	74.....	\$888
SD01-001SFL-MF.....	75.....	\$770
SD01-002CF.....	74.....	\$799
SD01-002CF-MF.....	75.....	\$680
SD01-002SF.....	74.....	\$778
SD01-002SF-MF.....	75.....	\$659
SD01-003CFL.....	74.....	\$924
SD01-003CFL-MF.....	75.....	\$807
SD01-003SFL.....	74.....	\$943
SD01-003SFL-MF.....	75.....	\$827
SD01-MFT.....	75.....	\$586
SD80V-EXT.....	73.....	\$475
SDL2436-1.....	33.....	\$8,068
SDL2436L-1.....	33.....	\$9,311
SDL2436LR-1.....	33.....	\$10,556
SDL2436R-1.....	33.....	\$9,311
SDL2448-1.....	33.....	\$8,689
SDL2448L-1.....	33.....	\$9,936
SDL2448LR-1.....	33.....	\$11,182
SDL2448R-1.....	33.....	\$9,936
SL2424-1.....	30.....	\$3,335
SL2424-316-1.....	21.....	\$6,739
SL2424-316-5.....	21.....	\$7,103
SL2424-5.....	30.....	\$3,468
SL2448-1.....	30.....	\$4,565
SL2448-316-1.....	21.....	\$10,199
SL2448-316-5.....	21.....	\$11,111
SL2448-5.....	30.....	\$4,732
SSL2418-1.....	32.....	\$4,949
SSL2418L-1.....	32.....	\$6,198
SSL2418LR-1.....	32.....	\$7,444

A Pricing

SSL2418R-1.....	32.....	\$6,198
SSL2424-1.....	32.....	\$5,576
SSL2424L-1.....	32.....	\$6,820
SSL2424LR-1.....	32.....	\$8,068
SSL2424R-1.....	32.....	\$6,820
SSS1827.....	28.....	\$17,236
SSS1827DDS.....	29.....	\$22,891
SSS1827SDSL.....	28.....	\$18,522
SSS1827SDSR.....	29.....	\$18,522
SSU1-00.....	56.....	\$9,374
SSU1-10.....	57.....	\$10,256
SSU1-2016-3.....	55.....	\$11,647
SSU1-2020-3.....	55.....	\$11,980
SSU2-00.....	56.....	\$13,548
SSU2-10.....	57.....	\$15,835
SSU2-2040-3.....	55.....	\$16,307
SSU3-00.....	56.....	\$19,348
SSU3-10.....	57.....	\$22,879
STL2454-1.....	34.....	\$9,936
STL2454L-1.....	34.....	\$11,182
STL2454LR-1.....	34.....	\$12,427
STL2454R-1.....	34.....	\$11,182
STL2472-1.....	34.....	\$13,048
STL2472L-1.....	34.....	\$14,299
STL2472LR-1.....	34.....	\$15,541
STL2472R-1.....	34.....	\$14,299
TL2454-1.....	31.....	\$6,530
TL2454-5.....	31.....	\$7,061
TL2472-1.....	31.....	\$8,094
TL2472-5.....	31.....	\$8,586
UCD6405P-1.....	12.....	\$1,002
UCD6408P-1.....	12.....	\$1,049
UCS4608-316P-1.....	20.....	\$1,118
UCS4610-316P-1.....	20.....	\$1,400
UCS6105P-1.....	12.....	\$784
UCS6805P-1.....	12.....	\$776
UCS6808P-1.....	12.....	\$821
V1114-5.....	43.....	\$310
V1114-5D.....	43.....	\$323
V1418-5.....	43.....	\$381
V1418-6.....	43.....	\$381
V1619-5-1.....	44.....	\$448
V1619-5-3.....	44.....	\$448
V1619-6-1.....	44.....	\$459
V1619-6-3.....	44.....	\$459
V17-5.....	43.....	\$419
V17-6.....	43.....	\$437
V1821-5-1.....	45.....	\$479
V1821-5-3.....	45.....	\$479
V1821-6-1.....	45.....	\$477
V1821-6-3.....	45.....	\$477
WB1119U-5.....	46.....	\$506
WB1420U-5.....	46.....	\$708
WDL2436-1.....	39.....	\$9,428

WDL2436L-1.....	39	\$10,781	WTS2096-1.....	27	\$7,151
WDL2436LR-1.....	39	\$12,135	WTS36-1.....	27	\$5,103
WDL2436R-1.....	39	\$10,781	WTS48-1.....	27	\$5,292
WDL2448-1.....	39	\$10,105	WTS60-1.....	27	\$5,613
WDL2448L-1.....	39	\$11,458	WTS72-1.....	27	\$5,894
WDL2448LR-1.....	39	\$12,811				
WDL2448R-1.....	39	\$11,458				
WHB1616-3.....	66	\$984				
WHB1617-3.....	67	\$1,271				
WHB1617-316-3.....	22	\$1,896				
WHB1617-6.....	67	\$1,413				
WHB1617-7.....	67	\$1,244				
WHB1716-3.....	69	\$1,189				
WHB1716SPL-3.....	69	\$1,445				
WHB1819-3.....	68	\$1,342				
WHB1819-316-3.....	22	\$1,930				
WHB1819-6.....	68	\$1,429				
WHB1819-7.....	68	\$1,307				
WHB2221-7.....	64	\$1,448				
WHB2221-8.....	64	\$1,448				
WHB2221-RS.....	64	\$376				
WHB2221-UC.....	64	\$282				
WHB5222-7.....	62	\$3,736				
WHB5222-PW.....	100	\$118				
WHB5222-RS.....	62	\$706				
WHBS181910-3.....	69	\$3,137				
WSL2418-1.....	38	\$6,342				
WSL2418L-1.....	38	\$7,759				
WSL2418LR-1.....	38	\$9,178				
WSL2418R-1.....	38	\$7,759				
WSL2424-1.....	38	\$7,053				
WSL2424L-1.....	38	\$8,469				
WSL2424LR-1.....	38	\$9,885				
WSL2424R-1.....	38	\$8,469				
WSS6713.....	69	\$7,469				
WT310E-7.....	65	\$980				
WT400C-7.....	65	\$1,288				
WT500C-7.....	65	\$1,442				
WT600C-7.....	66	\$1,562				
WTL2454-1.....	40	\$15,555				
WTL2454L-1.....	40	\$16,975				
WTL2454LR-1.....	40	\$18,392				
WTL2454R-1.....	40	\$16,975				
WTL2472-1.....	40	\$16,266				
WTL2472L-1.....	40	\$17,682				
WTL2472LR-1.....	40	\$19,101				
WTL2472R-1.....	40	\$17,682				
WT-RS.....	66	\$876				
WTS2025-1.....	27	\$4,428				
WTS2031-1.....	27	\$4,649				
WTS2036-1.....	27	\$5,719				
WTS2048-1.....	27	\$5,935				
WTS2060-1.....	27	\$6,295				
WTS2072-1.....	27	\$6,604				

Index B Pricing

Pricing effective as of March 1, 2025

Drinking fountains and bottle fillers

030774-006.....97.....	\$439	KEPACSL-EBF-GRY 88	\$4,456
032799-005.....97.....	\$321	KEPACSL-EBF-STN..... 88	\$5,182
035607-108.....97.....	\$160	KEPACSL-EBQ-GRY79	\$6,366
F037116-101.....97.....	\$274	KEPACSL-EBQ-STN79	\$6,690
F041145-001.....97.....	\$274	KEPACSL-GRY 91.....	\$2,222
F041253-001.....97.....	\$484	KEPACSL-SBF-GRY 88	\$4,258
KE041208-101.....90.....	\$1,172	KEPACSL-SBF-STN..... 88	\$5,117
KE041208-301.....91.....	\$3,090	KEPAC-STN..... 90	\$1,881
KEF100-STN 94	\$1,376	KEPV8AC-EBF-STN ... 86	\$6,686
KEF110PM-STN..... 94	\$2,603	KEPV8AC-SBF-STN ... 86	\$4,477
KEM8SBPM-STN..... 93	\$6,034	KEPV8ACSL-14G..... 92	\$9,618
KEM8WR-EBF-STN..... 83	\$10,866	KEPV8ACSL-EBF-STN87	\$8,980
KEMW8EBF-STN 82	\$9,248	KEPV8ACSL-SBF-STN87	\$4,674
KEMW8EBQ-STN 82	\$6,835	KEPV8ACSL-STN..... 92	\$4,940
KEMW8SBF-STN 82	\$7,036	KEPV8AC-STN..... 92	\$3,171
KEMWEBF-STN 82	\$7,719	KEPVAC-EBF-STN..... 86	\$5,867
KEMWSM8EBF-STN .. 82	\$10,232	KEPVAC-SBF-STN 86	\$3,611
KEMWSMEBF-STN 82	\$8,703	KEPVACSL-EBF-STN...87	\$7,549
KEP10CP-GRY..... 93	\$2,731	KEPVACSL-SBF-STN ..87	\$4,369
KEP3CP-GRY..... 93	\$2,416	KEPWEBF..... 80	\$1,949
KEP5CP-GRY..... 93	\$2,522	KEPWEBFF..... 80	\$2,144
KEP8AC-EBF-GRY 84	\$4,333	KEPWEBQ..... 77	\$4,264
KEP8AC-EBF-STN..... 84	\$4,708	KEPWSBF..... 80	\$1,590
KEP8AC-EBQ-GRY78	\$6,834	KEPWSBFF..... 80	\$1,759
KEP8AC-EBQ-STN78	\$7,160	KEPWSMEBF-STN..... 81.....	\$2,687
KEP8AC-SBFF-GRY ... 85	\$3,883	KEPWSMEBQ-STN 77	\$4,513
KEP8AC-SBFF-STN.... 85	\$4,576	KEPWSMSBF-STN 81.....	\$2,385
KEP8AC-SBF-GRY 85	\$3,688	KER12	95
KEP8AC-SBF-STN 85	\$4,442	KER1P	95
KEP8ACSL-EBF-GRY . 88	\$6,866	KER5	95
KEP8ACSL-EBF-STN.. 88	\$6,948	KER8	95
KEP8ACSL-EBQ-GRY.79	\$8,318		
KEP8ACSL-EBQ-STN .79	\$8,642		
KEP8ACSL-GRY 91	\$3,641		
KEP8ACSL-SBF-GRY . 88	\$5,678		
KEP8ACSL-SBF-STN . 88	\$5,997		
KEP8ACSL-STN..... 91	\$3,922		
KEP8ACSLT-GRY..... 91	\$8,070		
KEP8ACSLT-STN..... 91	\$8,460		
KEP8AC-STN..... 90	\$2,191		
KEP8ACT-EBFF-GRY . 84	\$6,938		
KEP8ACT-EBFF-STN.. 84	\$7,492		
KEP8ACT-EBF-GRY 84	\$6,743		
KEP8ACT-EBF-STN 84	\$7,297		
KEP8ACT-GRY 90	\$3,738		
KEP8ACT-STN 90	\$4,826		
KEPAC-EBF-GRY 84	\$4,047		
KEPAC-EBF-STN..... 84	\$4,397		
KEPAC-EBQ-GRY78	\$4,881		
KEPAC-EBQ-STN78	\$5,207		
KEPAC-GRY 90	\$1,646		
KEPAC-SBF-GRY 85	\$3,488		
KEPAC-SBF-STN..... 85	\$3,824		

Terms & Conditions & Warranty

Our General Terms and Conditions of Sale are exclusively applicable to the sale and delivery of our products. The respective valid version is available on: <https://www.franke.com/ca/en/home-solutions/general-terms-and-conditions-of-sale.html>

FRANKE HOME SOLUTIONS WARRANTY EFFECTIVE SEPTEMBER 1, 2022

In the United States, Canada and Latin America, Franke warrants the products from manufacturing defects in material and workmanship when purchased from Franke or a Franke Authorized Retailer pursuant to product-specific warranties detailed herein (each, a “Warranty” and collectively, the “Warranties”). The products must be properly installed, per company’s installations instructions, in its original installation, and used in normal indoor residential kitchen applications. Any products or components which have been modified or altered, from its original intended condition will void the warranty. The Franke Warranties are limited to the original purchaser and are non-transferrable. These Warranties do not include products purchased from non-Authorized Retailers, products that are obsolete or discontinued, or products that were previous display models. All issues with installed products are considered warranty claims and not subject to the Return Policy. Franke reserves the right to inspect any product reported to be defective and the original installation prior to providing a replacement product and/or component. All decisions are final. In no situation shall the liability of Franke exceed the amount of the original purchase price.

The Warranties do not cover, and Franke shall not be liable for, any damage to products or components resulting from misuse or abuse, accidental damages, normal wear such as scuffs, scratches or finish reduction/fading; improper installation, abnormal usage, negligence, damage caused by improper maintenance or cleaning. Damage caused by impurities, corrosive chemicals or acts beyond Franke’s control are not covered by any Warranty.

Franke product replacements do not include transportation, shipping, diagnosis, labor, installation, removal, disposal for any products or liability for project delays. Product replacements are not guaranteed to be exact replacements. The owner of a product is liable for any transportation and re-installation costs related to any warranty for such product. If the original product is not available at the time of the warranty claim, at Franke’s option, the product replacements will be of similar size, material, and value. Any products or components which have been modified or altered, from its original intended condition will void the warranty.

The Warranties do not allow recovery of incidental or consequential damages such as loss of use, delay, property damage or other consequential damage, and Franke accepts no liability for such damages. Each Warranty is limited to the conditions set forth herein and to the applicable warranty period specified herein and is exclusive. EXCEPT FOR THE WARRANTIES SET FORTH HEREIN, FRANKE MAKES NO WARRANTY WHATSOEVER WITH RESPECT TO THE PRODUCTS, INCLUDING, BUT NOT LIMITED TO, (1) ANY WARRANTY OF MERCHANTABILITY, (2) WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, (3) WARRANTY OF TITLE, OR (4) WARRANTY AGAINST INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS OF A THIRD PARTY, WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE. LEGAL DISCLAIMER PLEASE READ CAREFULLY. Franke Home Solutions North America, LLC/Franke Kindred Canada Limited provides the above information to you as a public service to our customers. By accessing and using this information, you agree to the following and to comply with all applicable laws. If you do not agree with these terms and conditions, do not use this information. While we try to keep the information current, changes may have occurred since its creation. Contact your Regional Manager or Customer Service to verify information regarding Franke Home Solutions North America, LLC/Franke Kindred Canada programs and their use by you.

Warranty

Every Franke Commercial product is guaranteed to be suitable for any normal purpose for which it is intended and without defects in material or workmanship for the following periods of time, provided it has been installed and maintained according to Franke Commercial instructions.

- ☐ Stainless steel topmount sinks, undermount, wall mount basins
 - 5 year warranty
- ☐ Stainless steel scullery sinks, mop and sewage sampling sinks
 - 1 year warranty
- ☐ Aquarius and Ozo-flo touch-free faucets
 - 5 year warranty on faucet body, cables & plug-in power supply (if equipped)
 - 1 year on solenoid valve
- ☐ HHF-series touch-free faucets
 - 1 year warranty on faucet body, cables & plug-in power supply (if equipped)
- ☐ Custom and fabricated products
 - 1 year warranty
- ☐ Drain fittings and waste parts
 - 1 year warranty
- ☐ Electronic water controls
 - 1 year warranty
- ☐ Solid surface wall hung sinks
 - 2 year warranty on sinks
 - 1 year warranty on electronics of Medi-flo
- ☐ Aqua-foam soap dispensers
 - 1 year warranty
- ☐ Drinking fountains, non-chilled
 - 1 year warranty
- ☐ Drinking fountains, chilled
 - 5 year warranty on sealed refrigerated systems
 - 1 year warranty on fountain part accessories



Franke Kindred Canada
1000 Franke Kindred Road
Midland, ON L4R 4K9
commercial-info.ca@franke.com
franke.com

Canada - English
#CMCLCATCAEN25