



**FRANKE**

# COMMERCIAL

2025 • 2026

# COMMERCIAL 2025 • 2026

## PRODUCT CATEGORIES

- 02 Stainless steel sinks
- 17 Type 316 laboratory sinks
- 26 Utility & scullery
- 42 Vanity basins
- 48 Healthcare
- 61 Hand wash basins
- 70 Washroom accessories
- 76 Waste fittings
- 80 Custom solutions
  
- 82 Corrosion resistance information
- 83 Care & maintenance
  
- 84 Index
- 88 Terms & conditions
- 88 Warranty









# Stainless Steel Sinks





Guaranteed to maintain their functionality over time, Franke Commercial stainless steel sinks remain brilliant and easy to clean. Stainless steel is the material of choice for commercial environments where durability, hygiene, and functionality matter most.

Franke Commercial stainless steel sinks have been engineered for quick and easy installation.

Our patented EZ Torque™ fasteners mean a Franke sink will **install five times faster** than the competition. One-handed drop and drill installation: fasteners come pre-installed on the sink meaning you can simply drop the sink into the countertop and use a drill to tighten the fasteners.

Factory applied rimseal simplifies installation. No need for silicone for the sink rim eliminates a messy step from the install process.



### Satin finish

A #4 satin finished bowl and deck allows scratches to be blended into the grain line. An ideal finish for commercial applications.



### EZ Torque™ fasteners

Install a Franke Commercial topmount sink in two easy steps: drop and drill. Bright red EZ Torque™ fasteners are easy to spot and can be tightened with a drill in seconds.



### Rimseal pre-installed

We make installing a Franke Commercial topmount sinks quick and easy. Our factory-applied Rimseal means fewer installation steps and less mess.



### Waste fitting included


Most Franke Commercial sinks are sold with a stainless steel waste kit included in the box. These high quality waste assemblies are also available separately.



## Single bowl topmount no faucet ledge, 20 gauge



Model S9106-1 shown



Single compartment self rimming topmount sink, 20 gauge (0.9 mm), type 302 (CNS 18/8) stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Certified to ASME A112.19.3/CSA B45.4.




	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	S9106-1	11 1/4" (286 mm)	13 5/8" (346 mm)	9 1/4" (235 mm)	11 5/8" (295 mm)	6" (152 mm)	C	20	\$ 292
	S6408-1	18 1/8" (460 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	20	\$ 445
	S6808-1	18 1/8" (460 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	20	\$ 506
	S6810-1	18 1/8" (460 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	C	20	\$ 620
	S7308-1	19 1/4" (489 mm)	25 1/4" (641 mm)	17" (432 mm)	23" (584 mm)	8" (203 mm)	CB	20	\$ 577

## Single bowl topmount no faucet ledge, 18 gauge



Model S6410PCB-1 shown




Single compartment self rimming topmount sink, 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Certified to ASME A112.19.3/CSA B45.4.



	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	AS6105P-1	18 1/8" (460 mm)	23 1/8" (587 mm)	16" (406 mm)	21" (533 mm)	5" (127 mm)	CB	18	\$ 913
	S6410PCB-1	18 1/8" (460 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	10" (254 mm)	CB	18	\$ 962
	S7314P-1	19 5/8" (498 mm)	25 5/8" (651 mm)	17 1/2" (445 mm)	23 1/2" (597 mm)	14" (356 mm)	C	18	\$ 2,220
	S8014P-1	20 1/8" (511 mm)	22 1/8" (562 mm)	18" (457 mm)	20" (508 mm)	14" (356 mm)	C	18	\$ 2,212



## Single bowl topmount with faucet ledge, 20 gauge



Model LBS6808-1 shown



Single compartment self rimming topmount sink with faucet ledge, 20 gauge (0.9 mm), type 302 (CNS 18/8) stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Certified to ASME A112.19.3/CSA B45.4.

Faucet hole options (add to part number when ordering):

- 1 1 hole, centered
- 2 2 hole, 4" spread
- 3 3 hole, 8" spread

	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	LBS9106-1	13 3/4" (349 mm)	13 5/8" (346 mm)	9 1/4" (235 mm)	11 5/8" (295 mm)	6" (152 mm)	C	1,2	\$ 392
•	LBS1306-1	15 7/16" (392 mm)	15 1/8" (384 mm)	11" (279 mm)	13" (330 mm)	6" (152 mm)	C	1,2	\$ 337
	LBS2708-1	17" (432 mm)	19 1/8" (486 mm)	12" (305 mm)	17" (432 mm)	8" (203 mm)	C	1,3	\$ 531
	LBS4607-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	7" (178 mm)	C	1,3	\$ 451
•	ALBS6805-1	20 9/16" (522 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	5" (127 mm)	LR	1,3	\$ 501
	LBS6807-1	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	7" (178 mm)	CB	1,3	\$ 498
	LBS6807-2	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	7" (178 mm)	CB	1,3	\$ 570
	LBS6808-1	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	1,3	\$ 547
	LBS6808-2	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	1,3	\$ 606
	LBS6810-1	20 9/16" (522 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	C	1,3	\$ 717
	LBS7508-1	22" (559 mm)	17 1/4" (438 mm)	17" (432 mm)	15" (381 mm)	8" (203 mm)	CB	1,3	\$ 508
	LBS7308-1	22 1/16" (560 mm)	25 5/8" (651 mm)	17" (432 mm)	23" (584 mm)	8" (203 mm)	CB	1,3	\$ 591

**Models ending in -1:** 3 1/2" stainless steel crumb cup strainer assembly with 1 1/2" tailpiece included


**Models ending in -2 have overflow:** 3 1/2" stainless steel crumb cup strainer assembly with overflow and 1 1/2" tailpiece included



## Single bowl topmount with faucet ledge, 18 gauge



Model LBS4608P-1 shown



Single compartment self rimming topmount sink, 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Certified to ASME A112.19.3/CSA B45.4

Faucet hole options (add to part number when ordering):

- 1 1 hole, centered
- 2 2 hole, 4" spread
- 3 3 hole, 8" spread




	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	ALBS1306P-1	15 7/16" (392 mm)	15 1/8" (384 mm)	11" (279 mm)	13" (330 mm)	6" (152 mm)	C	1,2	\$ 737
	LBS1308P-1	15 7/16" (392 mm)	15 1/8" (384 mm)	11" (279 mm)	13" (330 mm)	8" (203 mm)	C	1,2	\$ 705
•	ALBS2706P-1	17" (432 mm)	19 1/8" (486 mm)	12" (305 mm)	17" (432 mm)	6" (152 mm)	C	1,3	\$ 805
	LBS2708P-1	17" (432 mm)	19 1/8" (486 mm)	12" (305 mm)	17" (432 mm)	8" (203 mm)	C	1,3	\$ 776
•	ALBS4406P-1	18 13/16" (478 mm)	16 1/8" (410 mm)	14" (356 mm)	14" (356 mm)	6" (152 mm)	CB	1,3	\$ 751
	LBS4408P-1	18 13/16" (478 mm)	16 1/8" (410 mm)	14" (356 mm)	14" (356 mm)	8" (203 mm)	CB	1,3	\$ 764
	LBS4410P-1	18 13/16" (478 mm)	16 1/8" (410 mm)	14" (356 mm)	14" (356 mm)	10" (254 mm)	CB	1,3	\$ 980
•	ALBS4605P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	5" (127 mm)	C	1,3	\$ 896
•	ALBS4606P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	6" (152 mm)	C	1,3	\$ 896
	LBS4608P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	8" (203 mm)	C	1,3	\$ 873
	LBS4610P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	10" (254 mm)	C	1,3	\$ 1,065
•	ALBS4006P-1	18 13/16" (478 mm)	22 1/8" (562 mm)	14" (356 mm)	20" (508 mm)	6" (152 mm)	CB	1,3	\$ 875
	LBS4008P-1	18 13/16" (478 mm)	22 1/8" (562 mm)	14" (356 mm)	20" (508 mm)	8" (203 mm)	CB	1,3	\$ 833
	LBS4010P-1	18 13/16" (478 mm)	22 1/8" (562 mm)	14" (356 mm)	20" (508 mm)	10" (254 mm)	CB	1,3	\$ 971
•	ALBS6406P-1	20 9/16" (522 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	6" (152 mm)	CB	1,3	\$ 791
	LBS6408P-1	20 9/16" (522 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1,3	\$ 754
	LBS6410PCB-1	20 9/16" (522 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	10" (254 mm)	CB	1,3	\$ 927
•	ALBS6805P-1	20 9/16" (522 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	5" (127 mm)	LR	1,3	\$ 879
•	ALBS6806P-1	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	6" (152 mm)	CB	1,3	\$ 879
	LBS6808P-1	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	1,3	\$ 836
	LBS6810P-1	20 9/16" (521 mm)	20 1/8" (508 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	C	1,3	\$ 1,018
•	ALBS6106P-1	20 13/16" (529 mm)	23 1/8" (587 mm)	16" (406 mm)	21" (533 mm)	6" (152 mm)	CB	1,3	\$ 986
	LBS6108P-1	20 13/16" (529 mm)	23 1/8" (587 mm)	16" (406 mm)	21" (533 mm)	8" (203 mm)	CB	1,3	\$ 868
	LBS6110P-1	20 13/16" (529 mm)	23 1/8" (587 mm)	16" (406 mm)	21" (533 mm)	10" (254 mm)	CB	1,3	\$ 1,190

more next page >>

## Single bowl topmount with faucet ledge, 18 gauge



Model LBS7008P-1 shown



Single compartment self rimming topmount sink, 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Certified to ASME A112.19.3/CSA B45.4.

Faucet hole options (add to part number when ordering):

- 1 1 hole, centered
- 3 3 hole, 8" spread

	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	ALBS7006P-1	21 13/16" (554 mm)	22 1/8" (562 mm)	17" (432 mm)	20" (508 mm)	6" (152 mm)	CB	1,3	\$ 956
	LBS7008P-1	21 13/16" (554 mm)	22 1/8" (562 mm)	17" (432 mm)	20" (508 mm)	8" (203 mm)	CB	1,3	\$ 900
•	ALBS7506P-1	22" (559 mm)	17 1/4" (438 mm)	17" (432 mm)	15" (381 mm)	6" (152 mm)	CB	1,3	\$ 803
	LBS7508P-1	22" (559 mm)	17 1/4" (438 mm)	17" (432 mm)	15" (381 mm)	8" (203 mm)	CB	1,3	\$ 763
•	ALBS7306P-1	22 1/16" (560 mm)	25 5/8" (651 mm)	17" (432 mm)	23" (584 mm)	6" (152 mm)	CB	1,3	\$ 913
	LBS7308P-1	22 1/16" (560 mm)	25 5/8" (651 mm)	17" (432 mm)	23" (584 mm)	8" (203 mm)	CB	1,3	\$ 868
	LBS7310P-1	22 1/16" (560 mm)	25 5/8" (651 mm)	17" (432 mm)	23" (584 mm)	10" (254 mm)	CB	1,3	\$ 1,102
	LBS7312P-1	22 1/16" (560 mm)	25 5/8" (651 mm)	17 1/2" (445 mm)	23 1/2" (597 mm)	12" (305 mm)	C	1,3	\$ 1,216
	LBS7314P-1	22 9/16" (573 mm)	25 5/8" (651 mm)	17 1/2" (445 mm)	23 1/2" (597 mm)	14" (356 mm)	C	1,3	\$ 2,346
•	ALBS7806P-1	22" (559 mm)	30 1/8" (765 mm)	17" (432 mm)	28" (711 mm)	6" (152 mm)	CB	1,3	\$ 1,219
	LBS7808P-1	22" (559 mm)	30 1/8" (765 mm)	17" (432 mm)	28" (711 mm)	8" (203 mm)	CB	1,3	\$ 1,024
	LBS8014P-1	23 1/8" (587 mm)	22 1/8" (562 mm)	18" (457 mm)	20" (508 mm)	14" (356 mm)	C	1,3	\$ 2,276




# Double bowl topmount no faucet ledge



## Double bowl, no faucet ledge, 20 gauge D6408-1

Double compartment self rimming topmount sink, with Spillway partition in 20 gauge (0.9 mm), type type 302 (CNS 18/8) stainless steel. Polished #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **18 7/16 x 31 1/4"** Inside bowl **16 x 14 x 8"** Waste location **Center back**

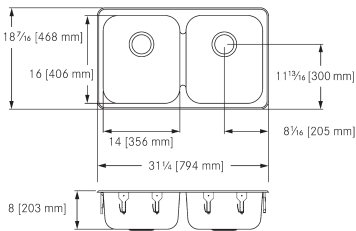


\$ 915




## Double bowl, no faucet ledge, 18 gauge D0814P-1

Double compartment self rimming topmount sink, 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **22 x 39"** Inside bowl **20 x 20 x 14"** Waste location **Center**

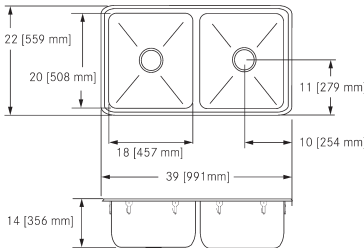

\$ 3,729

# Double bowl topmount with faucet ledge, 20 gauge

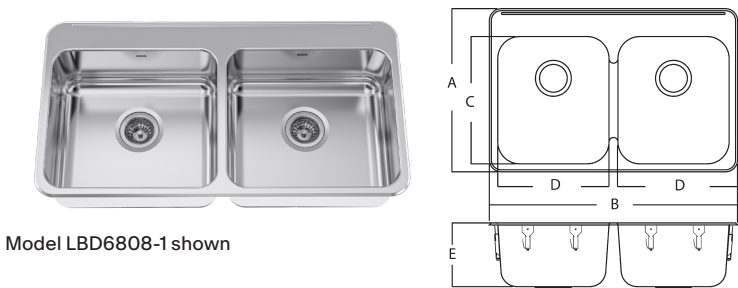


Model LBD6808-1 shown



Double compartment self rimming topmount, 20 gauge (0.9 mm), type 302 (CNS 18/8) stainless steel. #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4

Faucet hole options (*add to part number when ordering*):

- 1 1 hole, centered over partition
- 3 3 hole, 8" spread, centered over partition

	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	ALBD6405-1	20 1/2" (521 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	5" (127 mm)	LR, RR	1, 3	\$ 521
	LBD6407-1	20 1/2" (521 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	7" (178 mm)	CB	1, 3	\$ 844
	LBD6408-1	20 1/2" (521 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1, 3	\$ 844
	LBD6808-1	20 9/16" (522 mm)	39 3/16" (995 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	1, 3	\$ 992
	LBD7508-1	22" (559 mm)	33 1/4" (845 mm)	17" (432 mm)	15" (381 mm)	8" (203 mm)	CB	1, 3	\$ 541


## Topmount stainless steel sinks engineered for quick and easy installation

**Factory installed rimseal**  
Eliminates the need for silicone



Contractors and installers love the ease of installation of the Franke Rimseal. Simply peel off the backing and the sink is ready to install. No silicone mess.

**EZ Torque™ fasteners**  
Preinstalled on the sink, drop and drill installation

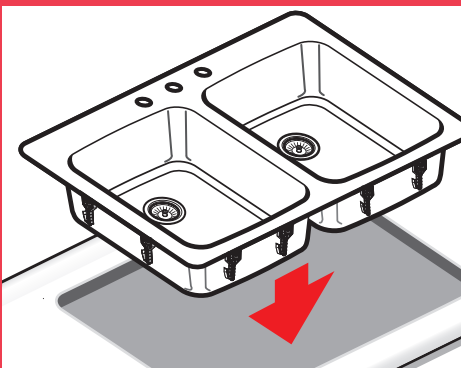


Secure the sink rim to the countertop in two easy steps. Drop the sink into the countertop then tighten with a drill. Clamps are preinstalled to sink, and won't get lost on the job site or left behind in the box.



# Double bowl topmount with faucet ledge, 18 gauge



Model LBD7310P-1 shown



Double compartment self rimming topmount sink, 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. #4 satin finished. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4

Faucet hole options (add to part number when ordering):  
-1 1 hole, centered over partition  
-2 2 hole, 8" spread  
-3 3 hole, 8" spread, centered over partition



ADA	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
	LBD1308P-1	15 13/16" (402 mm)	29 1/4" (743 mm)	11" (279 mm)	13" (330 mm)	8" (203 mm)	C	1,3	\$ 1,248
	• ALBDC182605P-1	18 1/4" (464 mm)	26 5/8" (677 mm)	16" (406 mm)	14" (356 mm)	6" (153 mm)	CB	2	\$ 1,036
	• ALBD4405P-1	18 13/16" (478 mm)	31 1/4" (794 mm)	14" (356 mm)	14" (356 mm)	5" (127 mm)	CB	1,3	\$1,336
	• ALBD4406P-1	18 13/16" (478 mm)	31 1/4" (794 mm)	14" (356 mm)	14" (356 mm)	6" (152 mm)	CB	1,3	\$1,336
	LBD4408P-1	18 13/16" (478 mm)	31 1/4" (794 mm)	14" (356 mm)	14" (356 mm)	8" (203 mm)	CB	1,3	\$ 1,271
	LBD4410P-1	18 13/16" (478 mm)	31 1/4" (794 mm)	14" (356 mm)	14" (356 mm)	10" (254 mm)	CB	1,3	\$ 1,611
	• ALBD6405P-1	20 1/2" (521 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	5" (127 mm)	RC	1,3	\$ 1,356
	• ALBD6406P-1	20 1/2" (520 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	6" (152 mm)	CB	1,3	\$ 1,356
	LBD6408P-1	20 1/2" (520 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1,3	\$ 1,291
	LBD6410PCB-1	20 13/16" (529 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	10" (254 mm)	CB	1,3	\$ 1,611
	• ALBD7506P-1	22" (559 mm)	33 1/4" (845 mm)	17" (432 mm)	15" (381 mm)	6" (152 mm)	CB	1,3	\$ 1,336
	LBD7508P-1	22" (559 mm)	33 1/4" (845 mm)	17" (432 mm)	15" (381 mm)	8" (203 mm)	CB	1,3	\$1,297
	LBD7510P-1	22" (559 mm)	33 1/4" (845 mm)	17" (432 mm)	15" (381 mm)	10" (254 mm)	CB	1,3	\$1,472
	LBD7310P-1	22" (559 mm)	49 3/8" (1254 mm)	17" (432 mm)	23" (584 mm)	10" (254 mm)	C	1,3	\$2,109
	LBD0814P-1	25" (635 mm)	39" (991 mm)	20" (508 mm)	18" (457 mm)	14" (356 mm)	C	1,3	\$4,035

## Triple bowl topmount with faucet ledge



### Triple bowl with faucet ledge, 20 gauge LBT6407CB-1


Triple compartment self rimming topmount sink with faucet ledge, 20 gauge (0.9mm), type 302 (CNS 18/8) stainless steel. Polished #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **20 9/16" x 46 3/8"**

Inside bowl **16 x 14 x 7"**

Waste location **Center back**

**\$ 974**

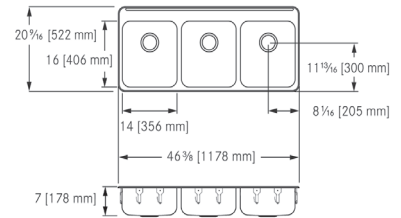

### Triple bowl with faucet ledge, 18 gauge LBT6410PCB-1

Triple compartment self rimming topmount sink with faucet ledge, 18 gauge (1.2mm), type 304 (CNS 18/10) stainless steel.


Polished #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **20 9/16" x 46 3/8"**

Inside bowl **16 x 14 x 10"**

Waste location **Center back**

**\$ 2,314**

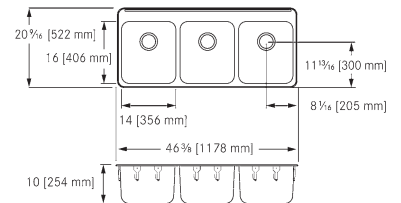

### Triple bowl with faucet ledge, 18 gauge LBT8610P-1

Triple compartment self rimming topmount sink with faucet ledge, 18 gauge (1.2mm), type 304 (CNS 18/10) stainless steel.


Polished #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **20 9/16" x 46 3/8"**

Inside bowl **16 x 14 x 10"**


Waste location **Center back**

**\$ 2,997**

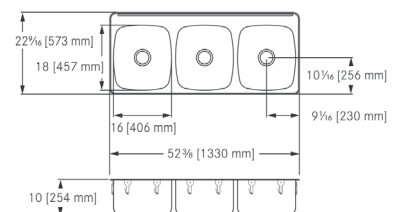



## Single bowl undermount, 18 gauge



Single compartment undermount sink in 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finished. Undercoated to reduce condensation and resonance. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Template and installation instructions included.


Certified to ASME A112.19.3/CSA B45.4.

Model UCS6808P-1 shown



	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	UCS6105P-1	17 3/4" (451 mm)	22 3/4" (346 mm)	16" (406 mm)	21" (533 mm)	5" (127 mm)	CB	18	\$ 626
•	UCS6805P-1	18 1/8" (460 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	5" (127 mm)	CB	18	\$ 566
	UCS6808P-1	18 1/8" (460 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	18	\$ 599

## Double bowl undermount, 18 gauge



Double compartment undermount sink in 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finished. Undercoated to reduce condensation and resonance. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpieces. Template and installation instructions included.

Certified to ASME A112.19.3/CSA B45.4.

Model UCD6408P-1 shown




	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	UCD6405P-1	17 3/4" (451 mm)	30 7/8" (784 mm)	16" (406 mm)	14" (356 mm)	5" (127 mm)	CB	18	\$ 731
	UCD6408P-1	17 3/4" (451 mm)	30 7/8" (784 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	18	\$ 765




**Looking for more undermount sinks?  
Franke Commercial no ledge topmount sinks  
can also be undermounted**

## Single bowl topmount drainboard, 18 gauge

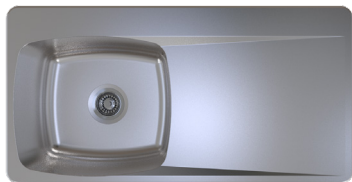

Model LBSDBR6810P-1 shown



Single compartment self rimming topmount sink with faucet ledge and drainboard. Drainboard slopes toward bowl. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finished. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Includes factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.

Faucet hole options (add to part number when ordering):

- 1 1 hole, centered
- 3 3 hole, 8" spread




	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
	LBSDL6408P-1	20 5/8" (524 mm)	36" (914 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1,3	\$ 2,496
	LBSDBR6408P-1	20 5/8" (524 mm)	36" (914 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1,3	\$ 2,496
	LBSDL6810P-1	20 9/16" (522 mm)	40" (1016 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	C	1,3	\$ 2,570
	LBSDBR6810P-1	20 9/16" (522 mm)	40" (1016 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	C	1,3	\$ 2,570

## Double bowl topmount drainboard, 18 gauge



Model LBDDBR6408P-1 shown

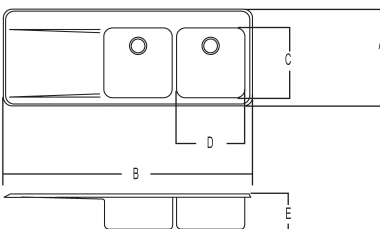

Double compartment self rimming topmount sink with faucet ledge and drainboard. Drainboard slopes toward bowl. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Includes waste assemblies, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.

Faucet hole options (add to part number when ordering):


- 1 1 hole, centered
- 3 3 hole, 8" spread



	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
	LBDDL6408P-1	20 1/2" (521 mm)	51" (1295 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1,3	\$ 3,194
	LBDDBR6408P-1	20 1/2" (521 mm)	51" (1295 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1,3	\$ 3,194



Art room sinks, topmount, no ledge, 18 gauge




Single compartment self rimming topmount sink in 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finished. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Certified to ASME A112.19.3/CSA B45.4.

Models ending in -1: 3 1/2" stainless steel crumb cup strainer assembly with 1 1/2" tailpiece included.

Model ART48-1 shown



	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
	ART36-1	19 1/8" (486 mm)	38 1/8" (969 mm)	17" (432 mm)	36" (914 mm)	8" (203 mm)	C	18	\$ 2,269
	ART48-1	19 1/8" (486 mm)	50 1/8" (1273 mm)	17" (432 mm)	48" (1219 mm)	8" (203 mm)	C	18	\$ 2,530
	ART60-1	19 1/8" (486 mm)	62 1/8" (1578 mm)	17" (432 mm)	60" (1524 mm)	8" (203 mm)	C	18	\$ 2,699

Classroom sinks, topmount, with right hand ledge, 18 gauge



Classroom sink with right ledge


ALRS4606P-1

Single compartment topmount sink with faucet ledge on right, 18 gauge (1.2mm), type 304 (CNS 18/10) stainless steel, #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions 16 1/8 x 20 13/16"

Inside bowl 14 x 16 x 6"

Waste location **Center back**

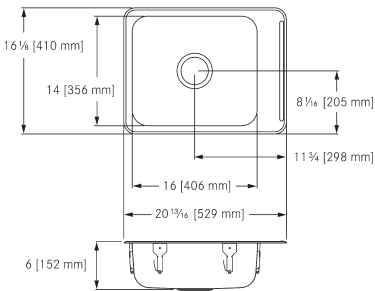


\$ 721

## Classroom sinks, topmount, back and left ledges, 18 gauge



Model ALBLS4606P-1 shown



Single compartment self rimming topmount sink with faucet ledges at back and left in 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finished. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes a 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece.


Certified to ASME A112.19.3/CSA B45.4.

	MODEL	Overall Dimensions		Sink Compartment Dimensions			LEDGE LOCATIONS	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	ALBLS4606P-1	16 1/8" (410 mm)	23 1/2" (597 mm)	14" (356 mm)	16" (406 mm)	6" (152 mm)	BACK AND LEFT	18	\$ 803
•	ALBLS7006P-1	21 13/16" (554 mm)	27 1/2" (699 mm)	17" (432 mm)	20" (508 mm)	6" (152 mm)	BACK AND LEFT	18	\$ 937

## Classroom sinks, topmount, back and right ledges, 18 gauge



Model ALBRS4606P-1 shown




Single compartment self rimming topmount sink with faucet ledges at back and right in 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finished. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes a 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece.

Certified to ASME A112.19.3/CSA B45.4.

	MODEL	Overall Dimensions		Sink Compartment Dimensions			LEDGE LOCATIONS	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	ALBRS4606P-1	16 1/8" (410 mm)	23 1/2" (597 mm)	14" (356 mm)	16" (406 mm)	6" (152 mm)	BACK AND RIGHT	18	\$ 803
•	ALBRS7006P-1	21 13/16" (554 mm)	27 1/2" (699 mm)	17" (432 mm)	20" (508 mm)	6" (152 mm)	BACK AND RIGHT	18	\$ 937

Classroom sinks, topmount, opposing ledges, 18 gauge



Single compartment topmount sink with faucet ledges on left and right, 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finished. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes a 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Certified to ASME A112.19.3/CSA B45.4.

Model ALHS6406P-1 shown




SEE BELOW FOR STANDARD FAUCET HOLE OPTIONS

	MODEL	Overall Dimensions		Sink Compartment Dimensions			LEDGE LOCATIONS	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	ALHS4606P-1	16 1/8" (410 mm)	23 1/2" (597 mm)	14" (356 mm)	16" (406 mm)	6" (152 mm)	LEFT AND RIGHT	18	\$ 745
	LHS4608P-1	16 1/8" (410 mm)	23 1/2" (597 mm)	14" (356 mm)	16" (406 mm)	8" (203 mm)	LEFT AND RIGHT	18	\$ 762
•	ALHS6406P-1	19 1/8" (486 mm)	30 1/2" (775 mm)	17" (432 mm)	23" (584 mm)	6" (152 mm)	LEFT AND RIGHT	18	\$ 803
•	ALHS7306P-1	21 13/16" (554 mm)	27 1/2" (699 mm)	17" (432 mm)	20" (508 mm)	6" (152 mm)	LEFT, BACK & RIGHT	18	\$ 875

Hole punch configurations for classroom sinks

ALRS Series

ALHS/LHS Series

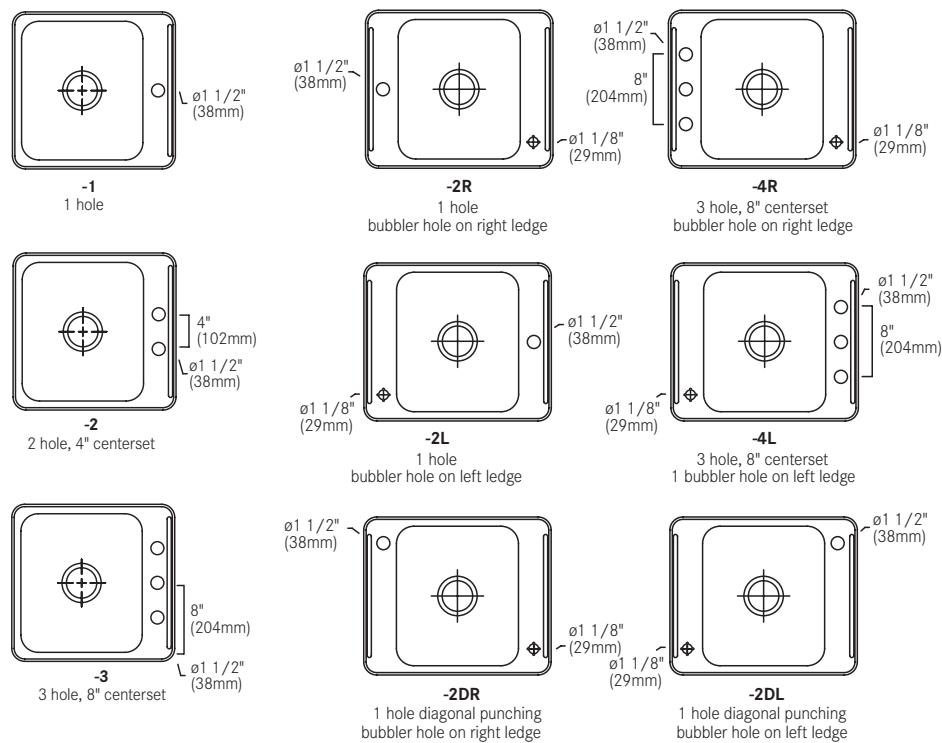




# Type 316 Stainless Sinks



## Single bowl topmount no faucet ledge Type 316 stainless steel




Single compartment self rimming topmount sink without faucet ledge, 18 gauge (1.2 mm), type 316/316L stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes 3 1/2" (89 mm) type 316 crumb cup waste assembly. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Model S6808-1 shown



	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
	S9407-316P-1	11 5/8" (295 mm)	16 5/8" (422 mm)	9 1/2" (241 mm)	14 1/2" (368 mm)	7" (178 mm)	C	18	\$ 599
	S6407-316P-1	18 1/8" (460 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	7" (178 mm)	CB	18	\$ 930
	S6808-316P-1	18 1/8" (460 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	18	\$ 932
	S6810-316P-1	18 1/8" (460 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	C	18	\$ 1,181

## Single bowl topmount with faucet ledge Type 316 stainless steel



Single compartment self rimming topmount sink with faucet ledge, 18 gauge (1.2 mm), type 316/316L stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes type 316 waste assembly. Certified to ASME A112.19.3-2008 / CSA B45.4-08

Faucet hole options (add to part number when ordering):

- 1 1 hole, centered
- 2 2 hole, 8" spread
- 3 3 hole, 8" spread, centered

Model LBS6808-1 shown



	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
	LBS9407-316P-1	14 5/16" (364 mm)	16 5/8" (422 mm)	9 1/2" (241 mm)	14 1/2" (368 mm)	7" (178 mm)	C	1,2	\$ 700
	LBS4607-316P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	7" (178 mm)	C	1,3	\$ 868
	LBS4610-316P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	10" (254 mm)	C	1,3	\$ 1,055
	LBS6407-316P-1	20 9/16" (522 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	7" (178 mm)	CB	1,3	\$ 948
	• ALBS6805-316P-1	20 9/16" (522 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	5" (127 mm)	LB	1,3	\$ 618
	LBS6807-316P-1	20 9/16" (522 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	7" (178 mm)	CB	1,3	\$ 965
	LBS6808-316P-1	20 9/16" (522 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	1,3	\$ 1,064
	LBS6810-316P-1	20 9/16" (522 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	CB	1,3	\$ 1,124

**Models ending in -1:** 3 1/2" type 316 stainless steel crumb cup strainer assembly with 1 1/2" tailpiece included

**Models ending in -3:** 1 1/2" type 316 stainless steel duplex waste assembly with rubber stopper included

## Double bowl topmount Type 316 stainless steel



### Double bowl no faucet ledge, T316 D6410-316PCB-1


Gauge **18**

Type **316/316L** Stainless Steel

Outside dimensions **18 1/8 x 31 1/4"**

Inside bowl **16 x 14 x 8"**

Waste location **Center back**  
3 1/2" (89 mm) type 316 waste  
assemblies included

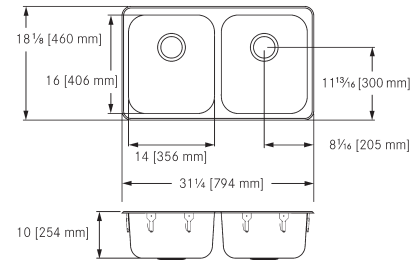

**\$ 1,810**



### Double bowl with faucet ledge, T316 LBD6408-316P-1


Gauge **18**

Type **316/316L** Stainless Steel

Outside dimensions **20 1/2 x 31 1/4"**

Inside bowl **16 x 14 x 8"**

Waste location **Center back**  
3 1/2" (89 mm) type 316 waste  
assemblies included

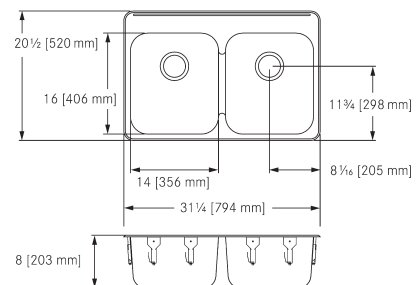

**\$ 1,623**



### Double bowl with faucet ledge, T316 LBD6410-316PCB-1


Gauge **18**

Type **316/316L** Stainless Steel

Outside dimensions **20 13/16 x 31 1/4"**

Inside bowl **16 x 14 x 10"**

Waste location **Center back**  
3 1/2" (89 mm) type 316 waste  
assemblies included

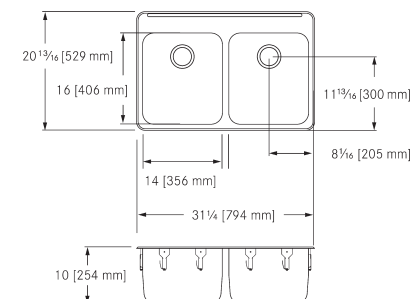

**\$ 1,930**






## Undermount Type 316 stainless steel




**Single bowl undermount**  
**UCS4608-316P-1**  
 Gauge **18**  
**TYPE 316/316L** Stainless Steel  
 Outside dimensions **16 1/8 x 18 1/8"**  
 Inside bowl **14 x 16 x 8"**  
 Waste location **Center**  
 3 1/2" (89 mm) type 316 crumb cup  
 waste assembly included

**\$ 868**

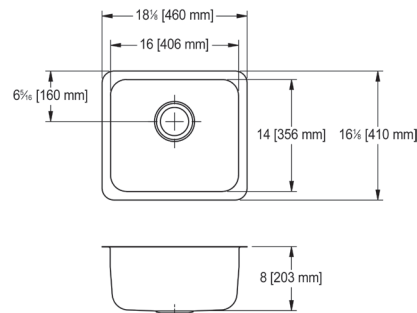

**Single bowl undermount, T316**  
**UCS4610-316P-1**  
 Gauge **18**  
**TYPE 316/316L** Stainless Steel  
 Outside dimensions **16 1/8 x 18 1/8"**  
 Inside bowl **14 x 16 x 10"**  
 Waste location **Center**  
 3 1/2" (89 mm) type 316 crumb cup  
 waste assembly included

**\$ 1,085**




## Single bowl topmount drainboard, type 316




**Drainboard left, T316**  
**LBSDBL6810-316P-1**  
 Gauge **18**  
**TYPE 316/316L** Stainless Steel  
 Outside dimensions **20 9/16 x 40"**  
 Inside bowl **16 x 18 x 10"**  
 Waste location **Center**  
 3 1/2" (89 mm) type 316 crumb cup  
 waste assembly included

**\$ 3,458**

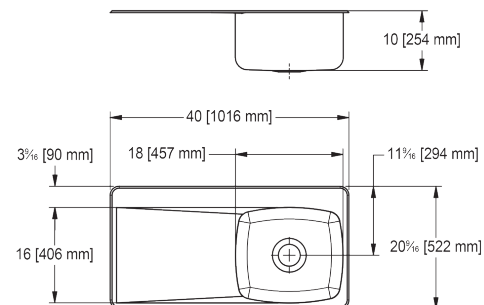

**Drainboard right, T316**  
**LBSDBR6810-316P-1**  
 Gauge **18**  
**TYPE 316/316L** Stainless Steel  
 Outside dimensions **20 9/16 x 40"**  
 Inside bowl **16 x 18 x 10"**  
 Waste location **Center**  
 3 1/2" (89 mm) type 316 crumb cup  
 waste assembly included


**\$ 3,458**

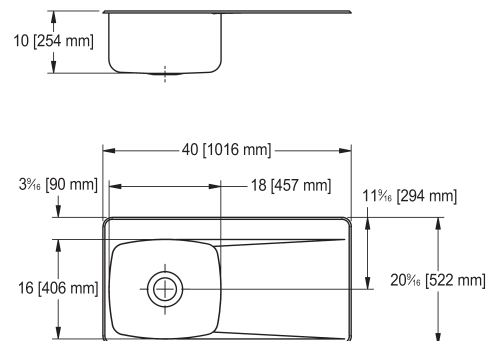

## Art room sinks, topmount, no ledge, type 316



Model ART48-1 shown



Single compartment self rimming topmount sink, 18 gauge (1.2 mm), corrosion resistant type 316/316L stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes type 316 waste assembly. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Models ending in -1: 3 1/2" type 316 stainless steel crumb cup strainer assembly with 1 1/2" tailpiece included.


Models ending in -3C: 1 1/2" type 316 stainless steel duplex waste assembly with rubber stopper included.

	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
	ART36-316-1	19 1/8" (486 mm)	38 1/8" (969 mm)	17" (432 mm)	36" (914 mm)	8" (203 mm)	C	18	\$ 2,955
	ART36-316-3C	19 1/8" (486 mm)	38 1/8" (969 mm)	17" (432 mm)	36" (914 mm)	8" (203 mm)	C	18	\$ 2,955
	ART48-316-1	19 1/8" (486 mm)	50 1/8" (1273 mm)	17" (432 mm)	48" (1219 mm)	8" (203 mm)	C	18	\$ 3,245
	ART48-316-3C	19 1/8" (486 mm)	50 1/8" (1273 mm)	17" (432 mm)	48" (1219 mm)	8" (203 mm)	C	18	\$ 3,245
	ART60-316-1	19 1/8" (486 mm)	62 1/8" (1578 mm)	17" (432 mm)	60" (1524 mm)	8" (203 mm)	C	18	\$ 3,532
	ART60-316-3C	19 1/8" (486 mm)	62 1/8" (1578 mm)	17" (432 mm)	60" (1524 mm)	8" (203 mm)	C	18	\$ 3,532

## Scullery sink, 16 gauge, type 316



Model SL2424-316-1 shown



Single bowl scullery sink, 16 gauge (1.5 mm), type 316 (EN1.4401 17/12/2) stainless steel, #4 satin finish. Sink compartment sloped to drain. Radius coved corners front and back only. Floor to rim height is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes waste assembly in type 316 stainless steel. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Models ending in -1: 3 1/2" type 316 stainless steel crumb cup strainer assembly with 1 1/2" tailpiece included.

Models ending in -5: 1 1/2" type 316 stainless steel duplex waste assembly with rubber stopper included, 1 1/2" (DN38) tailpiece, standpipe, and guard.

MODEL	Overall Dimensions		Sink Compartment Dimensions				WASTE LOCATION	GAUGE	PRICE
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH	F BACKSPLASH			
SL2424-316-1	27 3/16" (691 mm)	27 3/16" (691 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	C	16	\$ 5,321
SL2424-316-5	27 3/16" (691 mm)	27 3/16" (691 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	RR	16	\$ 5,608
SL2448-316-1	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	48" (1219 mm)	14" (356 mm)	9" (229 mm)	C	16	\$ 8,053
SL2448-316-5	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	48" (1219 mm)	14" (356 mm)	9" (229 mm)	RR	16	\$ 8,771

## Type 316 stainless steel sinks



### Wall mount sink, 6" deep, T316

**WHB1617-316-3**

Gauge **18**

**TYPE 316/316L** Stainless Steel


Outside dimensions **16 1/2 x 17"**

Inside bowl **14 x 12 x 6"**

**Waste fitting** type 316, 1 1/2" duplex  
waste assembly with rubber stopper  
included

Waste location **Center back**

**\$ 1,352**

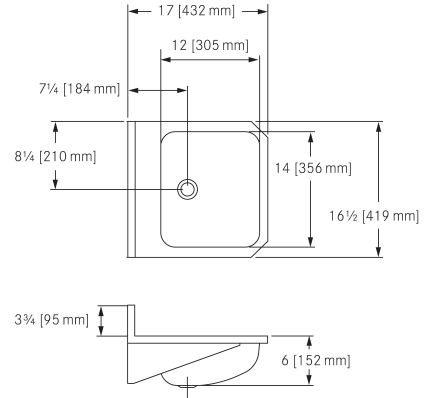

### Wall mount sink, 7" deep, T316

**WHB1819-316-3**

Gauge **18**

**TYPE 316/316L** Stainless Steel


Outside dimensions **18 1/2 x 19"**

Inside bowl **16 x 14 x 7"**

**Waste fitting** type 316, 1 1/2" duplex  
waste assembly with rubber stopper  
included

Waste location **Center**

**\$ 1,501**

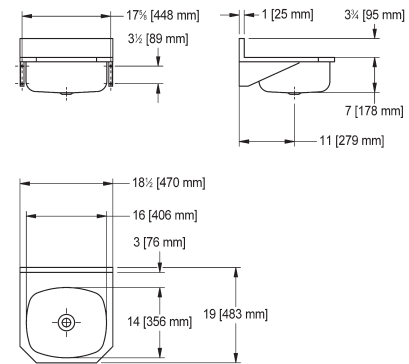

### Cup sink, oval, T316

**OC6-316**

Gauge **20**

**TYPE 316/316L** Stainless Steel


Outside dimensions **7 1/2 x 4 1/2"**

Inside bowl **6 x 3 x 3 11/16"**

**Waste fitting** Integral type 316, 1 1/2"  
duplex waste assembly included

Waste location **Center**

**\$ 453**



### Cup sink, round, T316

**RC6-316**

Gauge **20**

**TYPE 316/316L** Stainless Steel


Outside dimensions **7 5/8 x 7 5/8"**

Inside bowl **6 x 6 x 4 1/2"**

**Waste fitting** Integral type 316, 1 1/2"  
duplex waste assembly included

Waste location **Center**

**\$ 596**





## Mop Sinks, Type 316



16ga




### Single wall installation, T316 FSS151509-316-1

Gauge 16

**TYPE 316/316L** Stainless Steel  
Outside dimensions **17 1/2 x 17 1/2"**  
Inside bowl **15 x 15 x 9 1/8"**

**Waste fitting** 2" IPS grid shower drain  
included  
Waste location **Center**

**\$ 4,115**

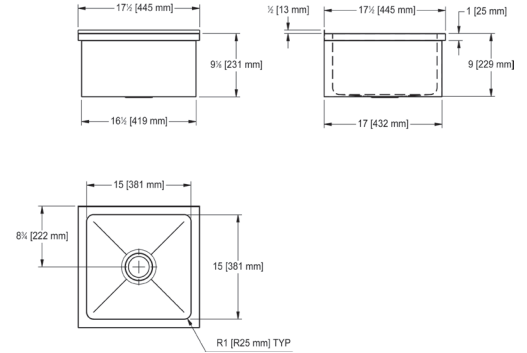

16ga





### Corner installation, T316 FSS222210-316-1

Gauge 16

**TYPE 316/316L** Stainless Steel  
Outside dimensions **24 x 24"**  
Inside bowl **21 1/2 x 21 1/2 x 10"**

**Waste fitting** 2" IPS grid shower drain  
included  
Waste location **Center**

**\$ 5,601**

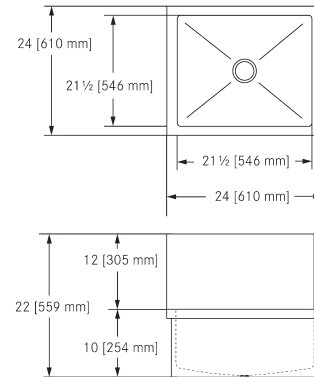

16ga





### Corner installation, T316 FSSL223410-316-1

Gauge 16

**TYPE 316/316L** Stainless Steel  
Side splash on left  
Outside dimensions **24 x 36"**  
Inside bowl **21 1/2 x 33 1/2 x 10"**

**Waste fitting** 2" IPS grid shower drain  
included  
Waste location **Center**

**\$ 7,157**

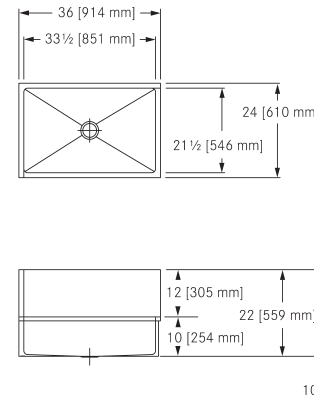

16ga




### Corner installation, T316 FSSR223410-316-1

Gauge 16

**TYPE 316/316L** Stainless Steel  
Side splash on right  
Outside dimensions **24 x 36"**  
Inside bowl **21 1/2 x 33 1/2 x 10"**

**Waste fitting** 2" IPS grid shower drain  
included  
Waste location **Center**

**\$ 7,157**

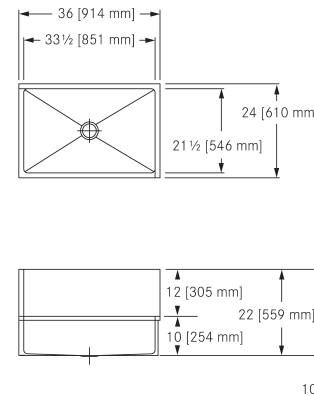

## Mop Sinks, Type 316






16ga



**Corner installation, T316**  
**FSS2210-316-1**  
 Gauge **16**  
**TYPE 316/316L** Stainless Steel  
 Outside dimensions **24 x 24"**  
 Inside bowl **21 1/2 x 21 1/2 x 10"**  
**Waste fitting** 2" IPS grid shower drain  
 included  
 Waste location **Center**

**\$ 8,214**


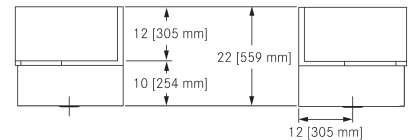



16ga



**Corner installation, low front, T316**  
**FSSO2210-316-1**  
 Gauge **16**  
**TYPE 316/316L** Stainless Steel  
 Outside dimensions **24 x 24"**  
 Inside bowl **21 1/2 x 21 1/2 x 6"**  
**Waste fitting** 2" IPS grid shower drain  
 included  
 Waste location **Center**

**\$ 8,214**

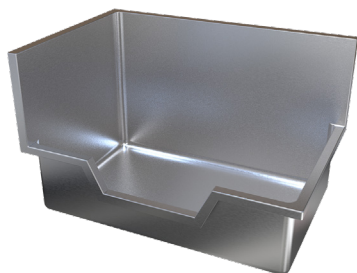




16ga



**Low front, T316**  
**FSSOL223410-316-1**  
 Gauge **16**  
**TYPE 316/316L** Stainless Steel  
 Side splash on left  
 Outside dimensions **24 x 36"**  
 Inside bowl **21 1/2 x 33 1/2 x 6"**  
**Waste fitting** 2" IPS grid shower drain  
 included  
 Waste location **Center**

**\$ 8,426**

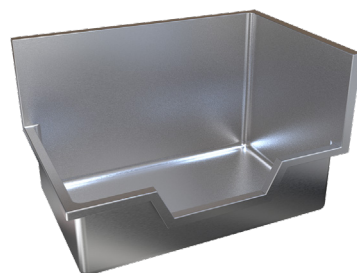



16ga



**Low front, T316**  
**FSSOR223410-316-1**  
 Gauge **16**  
**TYPE 316/316L** Stainless Steel  
 Side splash on right  
 Outside dimensions **24 x 36"**  
 Inside bowl **21 1/2 x 33 1/2 x 6"**  
**Waste fitting** 2" IPS grid shower drain  
 included  
 Waste location **Center**

**\$ 8,426**



# Pet wash stations



Pictured left to right: WTS60-1 trough sink, FSSOL223410-316-1 and FSSOR223410-316-1 mop sinks

## Dog washing stations: a must in multifamily developments

### Renters are living for their pets

Pet ownership in the US increased throughout the pandemic and remains at very high levels. Over 60% of households own at least one dog or cat, and that includes apartment and condo dwellers.

### Make space for pets in your floor plan

Most renters consider pet-friendly policies when choosing a place to live. A dog washing room on the main floor provides an accessible space for pet owners to clean off dirty paws or give their furbabies a full bath.

### Options for dogs big and small

Floor-mounted sinks allow large dogs to step into without the need for lifting or guiding onto a ramp. A wall-mounted trough is perfect for smaller dogs to be placed for washing at a comfortable height. High backsplashes help keep the mess contained.






# Utility & Scullery



27	Wall trough utility sinks
28	Sewage sampling
30	Scullery sinks, Classic
32	Scullery sinks, Service
35	Scullery sinks, Restaurant
38	Scullery sinks, World Class
41	Mop sinks

## Wall trough utility sink, 16 gauge




Single compartment wall trough, 16 gauge (1.5 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Radius coved bowl corners, rolled radius rim. Center waste location. 3 1/2" (89 mm) waste fitting with crumb cup strainer included. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Model WTS36-1 shown



MODEL	Overall Dimensions		Sink Compartment Dimensions				
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH	F BACKSPLASH	GAUGE
WTS36-1	18" (457 mm)	36" (914 mm)	14 3/4" (375 mm)	33 1/2" (851 mm)	8" (203 mm)	8" (203 mm)	16
WTS48-1	18" (457 mm)	48" (1219 mm)	14 3/4" (375 mm)	44 1/2" (1130 mm)	8" (203 mm)	8" (203 mm)	16
WTS60-1	18" (457 mm)	60" (1524 mm)	14 3/4" (375 mm)	56 1/2" (1435 mm)	8" (203 mm)	8" (203 mm)	16
WTS72-1	18" (457 mm)	72" (1829 mm)	14 3/4" (375 mm)	68 1/2" (1740 mm)	8" (203 mm)	8" (203 mm)	16

## Wall trough utility sink, 14 gauge



Single compartment wall trough, 14 gauge (2.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Radius coved bowl corners, rolled radius rim. Center waste location. 3 1/2" (89 mm) waste fitting with crumb cup strainer included. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Model WTS2036-1 shown



MODEL	Overall Dimensions		Sink Compartment Dimensions				
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH	F BACKSPLASH	GAUGE
WTS2025-1	20" (508 mm)	25" (635 mm)	16 1/2" (419 mm)	22" (559 mm)	10 1/2" (267 mm)	6" (152 mm)	14
WTS2031-1	20" (508 mm)	31" (787 mm)	16 1/2" (419 mm)	28" (711 mm)	10 1/2" (267 mm)	6" (152 mm)	14
WTS2036-1	20" (508 mm)	36" (914 mm)	16 1/2" (419 mm)	33" (838 mm)	8" (203 mm)	10" (254 mm)	14
WTS2048-1	20" (508 mm)	48" (1219 mm)	16 1/2" (419 mm)	45" (1143 mm)	8" (203 mm)	10" (254 mm)	14
WTS2060-1	20" (508 mm)	60" (1524 mm)	16 1/2" (419 mm)	57" (1448 mm)	8" (203 mm)	10" (254 mm)	14
WTS2072-1	20" (508 mm)	72" (1829 mm)	16 1/2" (419 mm)	69" (1753 mm)	8" (203 mm)	10" (254 mm)	14
WTS2096-1	20" (508 mm)	96" (2438 mm)	16 1/2" (419 mm)	93" (2362 mm)	8" (203 mm)	10" (254 mm)	14

## Sewage sampling sinks



### Sewage sampling sink, single bowl no drainboard SSS1827


Single compartment sewage sampling sink. 14 gauge (2.0 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners.

Anti-splash rim. Stainless steel  $\frac{3}{4}$ " (19 mm) O.D. flushing tube with  $\frac{1}{2}$ " (13 mm) NPS connection. 3" x 3" (76 x 76 mm) threaded waste outlet.

Certified to ASME A112.19.3 / CSA B45.4.

Please allow 8 weeks for delivery.

Inside bowl **14 x 18 x 15"**

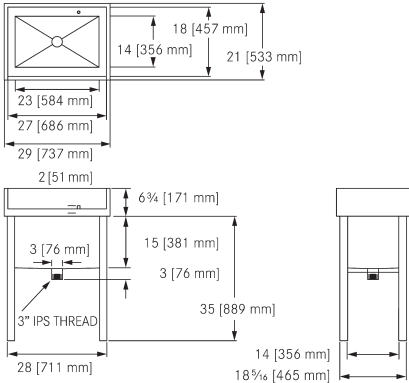

### Sewage sampling sink, single bowl, left drainboard SSS1827SDSL


Single compartment sewage sampling sink left drainboard. 14 gauge (2.0 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners.

Anti-splash rim. Stainless steel  $\frac{3}{4}$ " (19 mm) O.D. flushing tube with  $\frac{1}{2}$ " (13 mm) NPS connection. 3 x 3" (76 x 76 mm) threaded waste outlet.

Certified to ASME A112.19.3 / CSA B45.4.

Left drainboard.

Inside bowl **14 x 18 x 15"**

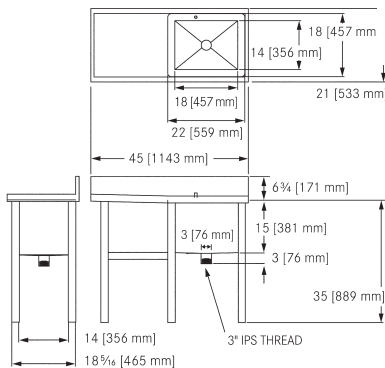

## Sewage sampling sinks



### Sewage sampling sink, single bowl, right drainboard SSS1827SDSR


Single compartment sewage sampling sink right drainboard. 14 gauge (2.0 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Anti-splash rim. Stainless steel  $\frac{3}{4}$ " (19 mm) O.D. flushing tube with  $\frac{1}{2}$ " (13 mm) NPS connection. 3" x 3" (76 x 76 mm) threaded waste outlet.

Certified to ASME A112.19.3 / CSA B45.4.

Please allow 8 weeks for delivery.

Right drainboard.

Inside bowl **14 x 18 x 15"**

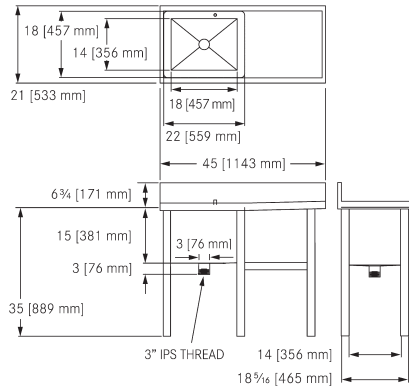

on  
legs

14ga

cUPC®



### Sewage sampling sink, left and right drainboards SSS1827DDS

Single compartment sewage sampling sink left and right drainboard. 14 gauge (2.0 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners.


Anti-splash rim. Stainless steel  $\frac{3}{4}$ " (19 mm) O.D. flushing tube with  $\frac{1}{2}$ " (13 mm) NPS connection. 3" x 3" (76 x 76 mm) threaded waste outlet.

Certified to ASME A112.19.3 / CSA B45.4.

Please allow 8 weeks for delivery.

Double drainboards.

Inside bowl **14 x 18 x 15"**

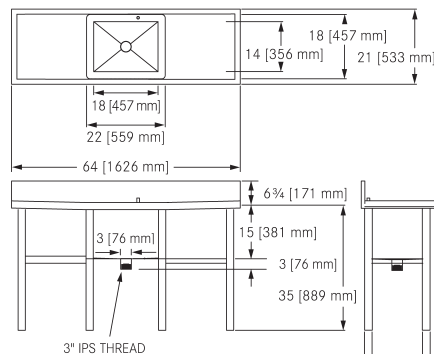


on  
legs

14ga

cUPC®



## Scullery sinks, Classic series



Model SL2424-1 shown



Single bowl scullery sink, 16 gauge (1.5 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartment sloped to drain, radius coved corners front and back only. Floor to rim height 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes waste assembly.


Standard faucet hole option: 2 hole, 1 1/4" (32 mm) diameter, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models.

Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Models ending in -1: 3 1/2" *crumb cup strainer assembly with 1 1/2" stainless steel tailpiece included.*

Models ending in -5: 1 1/2" *duplex waste assembly with rubber stopper, 1 1/2" (DN38) stainless steel tailpiece, standpipe, and guard included.*

MODEL	Overall Dimensions		Sink Compartment Dimensions				WASTE LOCATION	GAUGE
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH	F BACKSPLASH		
SL2424-1	27 3/16" (691 mm)	27 3/16" (691 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	C	16
SL2424-5	27 3/16" (691 mm)	27 3/16" (691 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	RR	16
SL2448-1	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	48" (1219 mm)	14" (356 mm)	9" (229 mm)	C	16
SL2448-5	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	48" (1219 mm)	14" (356 mm)	9" (229 mm)	RR	16



Model DL2448-1 shown



Double bowl scullery sink, 16 gauge (1.5 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartment sloped to drain, radius coved corners front and back only. Floor to rim height 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes waste assemblies.

Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models.

Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Models ending in -1: 3 1/2" *crumb cup strainer assembly with 1 1/2" stainless steel tailpiece included.*


Models ending in -5: 1 1/2" *duplex waste assembly with rubber stopper, 1 1/2" (DN38) stainless steel tailpiece, standpipe, and guard included.*

MODEL	Overall Dimensions		Sink Compartment Dimensions				WASTE LOCATION	GAUGE
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH	F BACKSPLASH		
DL2448-1	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	C	16
DL2448-5	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	RR, LR	16

# Scullery sinks, Classic series



Model TL2454-1 shown



Triple bowl bowl scullery sink, 16 gauge (1.5 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartment sloped to drain, radius coved corners front and back only. Floor to rim height 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes waste assemblies.

Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Certified to ASME A112.19.3-2008 / CSA B45.4-08

Models ending in -1: 3 1/2" crumb cup strainer assembly with 1 1/2" stainless steel tailpiece included.


Models ending in -5: 1 1/2" duplex waste assembly with rubber stopper, 1 1/2" (DN38) stainless steel tailpiece, standpipe, and guard included.

MODEL	Overall Dimensions		Sink Compartment Dimensions				WASTE LOCATION	GAUGE
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH	F BACKSPLASH		
TL2454-1	27 3/16" (691 mm)	57 3/8" (1457 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	C	16
TL2454-5	27 3/16" (691 mm)	57 3/8" (1457 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	RR, RR, LR	16
TL2472-1	27 3/16" (691 mm)	75 3/8" (1915 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	C	16
TL2472-5	27 3/16" (691 mm)	75 3/8" (1915 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	RR, RR, LR	16



## Removable drainboard for Classic series scullery sinks CL-DB

Removable drainboard for Classic series scullery sinks. 16 gauge (1.5 mm) type 304 stainless steel. Polished to a satin finish. The legs have adjustable feet and are interchangeable such that the product can be installed on either the left or right of the scullery. Outside dimensions **23 x 24 x 36"**  
Install on **left or right**



## Scullery sinks, Service series, single compartment



Model SSL2424-1 shown

Single bowl scullery sink with square bowl corners. 14 gauge (2.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartment sloped to center drain, radius coved corners front and back only. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece.


Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm).

Standard faucet hole option: 2 hole, 1 1/4" (32 mm) diameter, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Please allow 8 weeks for delivery, these models are built to order and non-returnable.

Certified to ASME A112.19.3-2008 / CSA B45.4-08.




### Single compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions					
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE
SSL2418-1	30 1/2" (775 mm)	22 1/4" (565 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	14
SSL2424-1	30 1/2" (775 mm)	28 1/4" (718 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	14

### Single compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions					
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE
SSL2418L-1	30 1/2" (775 mm)	40 1/4" (1022 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	14
SSL2418R-1	30 1/2" (775 mm)	40 1/4" (1022 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	14
SSL2424L-1	30 1/2" (775 mm)	52 1/4" (1327 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	14
SSL2424R-1	30 1/2" (775 mm)	52 1/4" (1327 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	14

### Single compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions					
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE
SSL2418LR-1	30 1/2" (775 mm)	58 1/4" (1480 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L & R	14
SSL2424LR-1	30 1/2" (775 mm)	76 1/4" (1937 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L & R	14

## Scullery sinks, Service series, double compartment



Double bowl scullery sink with square bowl corners. 14 gauge (2.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartments sloped to center drain, radius coved corners front and back only. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece.

Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm).


Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models.

Please allow 8 weeks for delivery, these models are built to order and non-returnable. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Model SDL2448-1 shown




### Double compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions					
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE
SDL2436-1	30 1/2" (775 mm)	42 1/4" (1073 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	14
SDL2448-1	30 1/2" (775 mm)	54 1/4" (1378 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	14

### Double compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions					
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE
SDL2436L-1	30 1/2" (775 mm)	60 1/4" (1530 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	14
SDL2436R-1	30 1/2" (775 mm)	60 1/4" (1530 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	14
SDL2448L-1	30 1/2" (775 mm)	78 1/4" (1988 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	14
SDL2448R-1	30 1/2" (775 mm)	78 1/4" (1988 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	14

### Double compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions					
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE
SDL2436LR-1	30 1/2" (775 mm)	78 1/4" (1988 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L & R	14
SDL2448LR-1	30 1/2" (775 mm)	102 1/4" (2597 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L & R	14



## Scullery sinks, Service series, triple compartment



Model STL2472-1 shown

Triple bowl scullery sink with square bowl corners. 14 gauge (2.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartments sloped to center drain, radius coved corners front and back only. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece.

Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm).

Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models.

Please allow 8 weeks for delivery, these models are built to order and non-returnable.

Certified to ASME A112.19.3-2008 / CSA B45.4-08.




### Triple compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions					
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE
STL2454-1	30 1/2" (775 mm)	60 1/4" (1530 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	14
STL2472-1	30 1/2" (775 mm)	78 1/4" (1988 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	14

### Triple compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions					
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE
STL2454L-1	30 1/2" (775 mm)	78 1/4" (1988 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	14
STL2454R-1	30 1/2" (775 mm)	78 1/4" (1988 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	14
STL2472L-1	30 1/2" (775 mm)	102 1/4" (2597 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	14
STL2472R-1	30 1/2" (775 mm)	102 1/4" (2597 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	14

### Triple compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions					
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE
STL2454LR-1	30 1/2" (775 mm)	96 1/4" (2445 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L & R	14
STL2472LR-1	30 1/2" (775 mm)	126 1/4" (3207 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L & R	14

## Scullery sinks, Restaurant series, single compartment




Single bowl scullery sink with radius coved corners, constructed with hygiene and food safety in mind. 16 gauge (1.5 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartment sloped to center drain, radius coved corners that are easy to clean. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm).  
Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Please allow 6 weeks for delivery, these models are built to order and non-returnable. Product compliance ASME A112.19.3/ CSA B45.4, NSF 2.

Model RSL2424-1 shown




### Single compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions					
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE
RSL2418-1	30 1/2" (775 mm)	22 1/4" (565 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	16
RSL2424-1	30 1/2" (775 mm)	28 1/4" (718 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	16

### Single compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions					
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE
RSL2418L-1	30 1/2" (775 mm)	40 1/4" (1022 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	16
RSL2418R-1	30 1/2" (775 mm)	40 1/4" (1022 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	16
RSL2424L-1	30 1/2" (775 mm)	52 1/4" (1327 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	16
RSL2424R-1	30 1/2" (775 mm)	52 1/4" (1327 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	16

### Single compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions					
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE
RSL2418LR-1	30 1/2" (775 mm)	58 1/4" (1480 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L & R	16
RSL2424LR-1	30 1/2" (775 mm)	76 1/4" (1937 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L & R	16

## Scullery sinks, Restaurant series, double compartment




Double bowl scullery sink with radius coved corners, constructed with hygiene and food safety in mind. 16 gauge (1.5 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartments sloped to center drain, radius coved corners that are easy to clean. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm). Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Please allow 6 weeks for delivery, these models are built to order and non-returnable. Product compliance ASME A112.19.3/ CSA B45.4, NSF 2.

Model RDL2448-1 shown




### Double compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions					
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE
RDL2436-1	30 1/2" (775 mm)	44 1/4" (1121 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	16
RDL2448-1	30 1/2" (775 mm)	56 1/8" (1425 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	16

### Double compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions					
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE
RDL2436L-1	30 1/2" (775 mm)	62 1/8" (1578 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	16
RDL2436R-1	30 1/2" (775 mm)	62 1/8" (1578 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	16
RDL2448L-1	30 1/2" (775 mm)	80 1/8" (2035 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	16
RDL2448R-1	30 1/2" (775 mm)	80 1/8" (2035 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	16

### Double compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions					
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE
RDL2436LR-1	30 1/2" (775 mm)	80 1/8" (2035 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L & R	16
RDL2448LR-1	30 1/2" (775 mm)	104 1/8" (2645 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L & R	16

## Scullery sinks, Restaurant series, triple compartment



Model RTL2472-1 shown

Triple bowl scullery sink with radius coved corners, constructed with hygiene and food safety in mind. 16 gauge (1.5 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartments sloped to center drain, radius coved corners that are easy to clean. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece.

Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm).


Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models.

Please allow 6 weeks for delivery, these models are built to order and non-returnable.

Product compliance ASME A112.19.3/ CSA B45.4, NSF 2.




### Triple compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions					
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE
RTL2454-1	30 1/2" (775 mm)	64 1/8" (1629 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	16
RTL2472-1	30 1/2" (775 mm)	82 1/8" (2086 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	16

### Triple compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions					
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE
RTL2454L-1	30 1/2" (775 mm)	78 1/8" (1984 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	16
RTL2454R-1	30 1/2" (775 mm)	78 1/8" (1984 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	16
RTL2472L-1	30 1/2" (775 mm)	106 1/8" (2695 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	16
RTL2472R-1	30 1/2" (775 mm)	106 1/8" (2695 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	16

### Triple compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions					
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE
RTL2454LR-1	30 1/2" (775 mm)	92 1/8" (2340 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L & R	16
RTL2472LR-1	30 1/2" (775 mm)	130 1/8" (3305 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L & R	16



## Scullery sinks, World Class series, single compartment




Single bowl scullery sink with radius coved bowl corners, constructed with hygiene and food safety in mind. 14 gauge (2.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartment sloped to center drain, radius coved corners that are easy to clean. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm). Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Please allow 8 weeks for delivery, these models are built to order and non-returnable. Product compliance ASME A112.19.3/ CSA B45.4, NSF 2.

Model WSL2424-1 shown




### Single compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions					
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE
WSL2418-1	30 1/2" (775 mm)	22 1/4" (565 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	14
WSL2424-1	30 1/2" (775 mm)	28 1/4" (718 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	14

### Single compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions					
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE
WSL2418L-1	30 1/2" (775 mm)	40 1/4" (1022 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	14
WSL2418R-1	30 1/2" (775 mm)	40 1/4" (1022 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	14
WSL2424L-1	30 1/2" (775 mm)	52 1/4" (1327 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	14
WSL2424R-1	30 1/2" (775 mm)	52 1/4" (1327 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	14

### Single compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions					
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE
WSL2418LR-1	30 1/2" (775 mm)	58 1/4" (1480 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L & R	14
WSL2424LR-1	30 1/2" (775 mm)	76 1/4" (1937 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L & R	14

## Scullery sinks, World Class series, double compartment




Model WDL2448-1 shown

Double bowl scullery sink with radius coved bowl corners, constructed with hygiene and food safety in mind. 14 gauge (2.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartments sloped to center drain, radius coved corners that are easy to clean. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm).  
Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Please allow 8 weeks for delivery, these models are built to order and non-returnable. Product compliance ASME A112.19.3/ CSA B45.4, NSF 2.




### Double compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions					
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE
WDL2436-1	30 1/2" (775 mm)	44 1/4" (1121 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	14
WDL2448-1	30 1/2" (775 mm)	56 1/8" (1425 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	14

### Double compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions					
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE
WDL2436L-1	30 1/2" (775 mm)	62 1/8" (1578 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	14
WDL2436R-1	30 1/2" (775 mm)	62 1/8" (1578 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	14
WDL2448L-1	30 1/2" (775 mm)	80 1/8" (2035 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	14
WDL2448R-1	30 1/2" (775 mm)	80 1/8" (2035 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	14

### Double compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions					
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE
WDL2436LR-1	30 1/2" (775 mm)	80 1/8" (2035 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L & R	14
WDL2448LR-1	30 1/2" (775 mm)	104 1/8" (2645 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L & R	14

## Scullery sinks, World Class series, triple compartment




Triple bowl scullery sink with radius coved bowl corners, constructed with hygiene and food safety in mind. 14 gauge (2.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartments sloped to center drain, radius coved corners that are easy to clean. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm). Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Please allow 8 weeks for delivery, these models are built to order and non-returnable. Product compliance ASME A112.19.3/ CSA B45.4, NSF 2.

Model WDL2448-1 shown




### Triple compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions					
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE
WTL2454-1	30 1/2" (775 mm)	64 1/8" (1629 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	14
WTL2472-1	30 1/2" (775 mm)	82 1/8" (2086 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	14

### Triple compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions					
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE
WTL2454L-1	30 1/2" (775 mm)	78 1/8" (1984 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	14
WTL2454R-1	30 1/2" (775 mm)	78 1/8" (1984 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	14
WTL2472L-1	30 1/2" (775 mm)	106 1/8" (2695 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	14
WTL2472R-1	30 1/2" (775 mm)	106 1/8" (2695 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	14

### Triple compartment with drainboard left and right




	Overall Dimensions		Sink Compartment Dimensions					
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH	D.BOARD LOCATION	GAUGE
WTL2454LR-1	30 1/2" (775 mm)	92 1/8" (2340 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L & R	14
WTL2472LR-1	30 1/2" (775 mm)	130 1/8" (3305 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L & R	14

# Mop utility sinks



## Mop sinks, boot wash stations in Type 316 stainless steel



Model FSSOR223410-316-1 shown

	Overall Dimensions		Sink Compartment Dimensions					
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	FRONT EDGE STYLE	SPLASH LOCATION	GAUGE
FSS151509-316-1	17 1/2" (445 mm)	17 1/2" (445 mm)	15" (381 mm)	15" (381 mm)	9 1/4" (231 mm)	Straight	-	16
FSS222210-316-1	24" (610 mm)	24" (610 mm)	21 1/2" (546 mm)	21 1/2" (546 mm)	10" (254 mm)	Straight	L&R	16
FSSL223410-316-1	24" (610 mm)	36" (914 mm)	21 1/2" (546 mm)	33 1/2" (851 mm)	10" (254 mm)	Straight	L	16
FSSR223410-316-1	24" (610 mm)	36" (914 mm)	21 1/2" (546 mm)	33 1/2" (851 mm)	10" (254 mm)	Square front	R	16
FSS2210-316-1	24" (610 mm)	24" (610 mm)	21 1/2" (546 mm)	21 1/2" (546 mm)	10" (254 mm)	Angular front	L&R	16
FSSO2210-316-1	24" (610 mm)	24" (610 mm)	21 1/2" (546 mm)	21 1/2" (546 mm)	10" (254 mm)	Drop front	L&R	16
FSSOL223410-316-1	24" (610 mm)	36" (914 mm)	21 1/2" (546 mm)	33 1/2" (851 mm)	10" (254 mm)	Drop front	L	16
FSSOR223410-316-1	24" (610 mm)	36" (914 mm)	21 1/2" (546 mm)	33 1/2" (851 mm)	10" (254 mm)	Drop front	R	16



Detailed specification information on MOP SINKS can be found on pages 23 & 24




# Vanity Basins



## Oval vanity basin topmount no faucet ledge



Model V1114-5 shown



Single compartment self rimming oval topmount vanity basin without faucet ledge. 18 gauge (1.2 mm), Type 304 (CNS 18/10) stainless steel with satin finish bowl, mirror finish rim. Center back waste location. Undercoated to reduce condensation and resonance. Factory applied rim seal. Includes cutout template and installation hardware.

Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Models that end in -5D or -6D include a 1 1/2" (38 mm) waste assembly with rubber stopper.


Models that end in -5 or -6 accept a 1 1/4" (32 mm) waste assembly, not included.

	MODEL	Overall Dimensions		Sink Compartment Dimensions			OVER-FLOW	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	V1114-5	10 7/8" [276 mm]	14 3/8" [365 mm]	8 1/8" [206 mm]	11 5/8" [295 mm]	5" [127 mm]	-	18	\$ 379
•	V1114-5D	10 7/8" [276 mm]	14 3/8" [365 mm]	8 1/8" [206 mm]	11 5/8" [295 mm]	5" [127 mm]	-	18	\$ 443
•	V1418-6	13 3/4" [349 mm]	18 1/4" [464 mm]	11" [279 mm]	15 1/2" [394 mm]	6" [152 mm]	-	18	\$ 488
•	OV1418-6	13 3/4" [349 mm]	18 1/4" [464 mm]	11" [279 mm]	15 1/2" [394 mm]	6" [152 mm]	Front	18	\$ 644

## Round vanity basin topmount no faucet ledge



Model OV17-5 shown




Single compartment self rimming round topmount vanity basin without faucet ledge. 18 gauge (1.2 mm), Type 304 (CNS 18/10) stainless steel with satin finish bowl, mirror finish rim. Center back waste location. Undercoated to reduce condensation and resonance. Factory applied rim seal. Includes cutout template and installation hardware.

Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Models that end in -5 or -6 accept a 1 1/4" (32 mm) waste assembly, not included.

	MODEL	Overall Dimensions		Sink Compartment Dimensions			OVER-FLOW	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	V17-5	16 3/4" [425 mm]	16 3/4" [425 mm]	14" [356 mm]	14" [356 mm]	5" [127 mm]	-	18	\$ 513
•	OV17-5	16 3/4" [425 mm]	16 3/4" [425 mm]	14" [356 mm]	14" [356 mm]	5" [127 mm]	Back	18	\$ 589
•	V17-6	16 3/4" [425 mm]	16 3/4" [425 mm]	14" [356 mm]	14" [356 mm]	5" [127 mm]	-	18	\$ 578
•	OV17-6	16 3/4" [425 mm]	16 3/4" [425 mm]	14" [356 mm]	14" [356 mm]	6" [152 mm]	Front	18	\$ 621

## Vanity basin topmount with faucet ledge



**With ledge, 5" deep, overflow**  
**OV1619-5-1** 1 hole, centered  
**OV1619-5-3** 3 hole, 4" centerset

Gauge **18**

Outside dimensions **16 3/8 x 18 1/2"**

Inside bowl **11 x 15 3/16 x 5"**



Mirror finished rim, #4 satin finished bowl

Integral **overflow** at back of bowl

Accepts 1 1/4" (32 mm) overflow waste assembly,  
not included

Waste location **Center back**

**\$ 649**

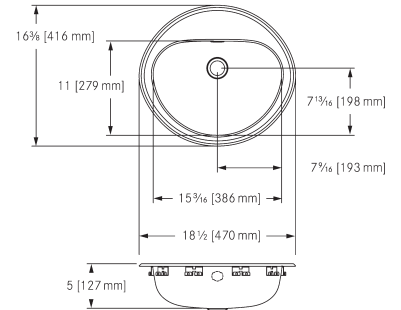

**With ledge, 5" deep, no overflow**  
**V1619-5-1** 1 hole, centered  
**V1619-5-3** 3 hole, 4" centerset

Gauge **18**

Outside dimensions **16 3/8 x 18 1/2"**



Inside bowl **11 x 15 3/16 x 5"**

Mirror finished rim, #4 satin finished bowl

Accepts 1 1/4" (32 mm) waste assembly, not  
included

Waste location **Center back**

**\$ 644**

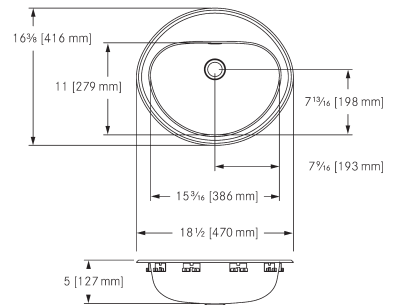

**With ledge, 6" deep, overflow**  
**OV1619-6-1** 1 hole, centered  
**OV1619-6-3** 3 hole, 4" centerset

Gauge **18**

Outside dimensions **16 3/8 x 18 1/2"**

Inside bowl **11 x 15 3/16 x 6"**


Mirror finished rim, #4 satin finished bowl

Integral **overflow** at back of bowl

Accepts 1 1/4" (32 mm) overflow waste assembly,  
not included

Waste location **Center back**

**\$ 657**

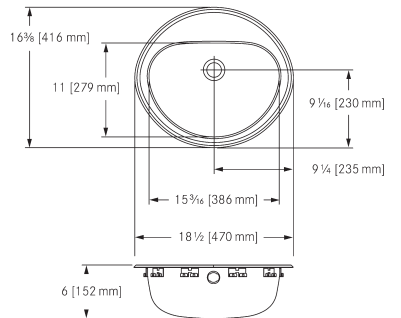

**With ledge, 6" deep, no overflow**  
**V1619-6-1** 1 hole, centered  
**V1619-6-3** 3 hole, 4" centerset

Gauge **18**

Outside dimensions **16 3/8 x 18 1/2"**


Inside bowl **11 x 15 3/16 x 6"**

Mirror finished rim, #4 satin finished bowl

Accepts 1 1/4" (32 mm) waste assembly, not  
included

Waste location **Center back**

**\$ 653**

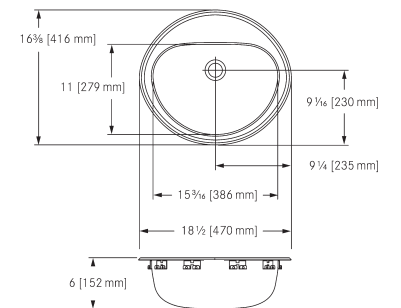

## Vanity basin topmount with faucet ledge



**With ledge, 5" deep, overflow**

**OV1821-5-1** 1 hole, centered

**OV1821-5-3** 3 hole, 4" centerset

Gauge 18

Outside dimensions **18 x 21"**

Inside bowl **11 7/16 x 18 x 5"**



Mirror finished rim, #4 satin finished bowl

Integral **overflow** at back of bowl

Accepts 1 1/4" (32 mm) overflow waste assembly, not included

Waste location **Center back**

**\$ 694**

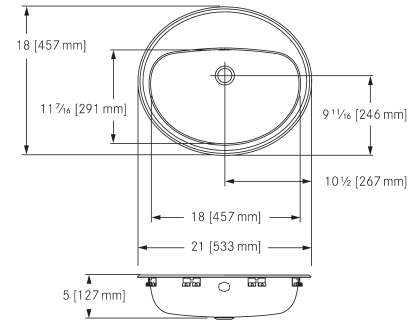

**With ledge, 5" deep, no overflow**

**V1821-5-1** 1 hole, centered

**V1821-5-3** 3 hole, 4" centerset

Gauge 18

Outside dimensions **18 x 21"**



Inside bowl **11 7/16 x 18 x 5"**

Mirror finished rim, #4 satin finished bowl

Accepts 1 1/4" (32 mm) waste assembly, not included

Waste location **Center back**

**\$ 671**

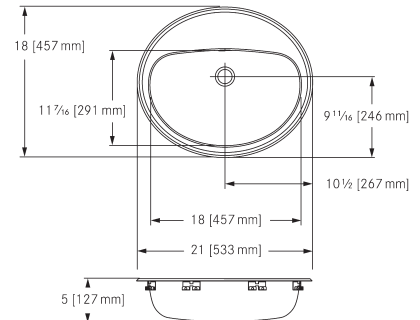

**With ledge, 6" deep, overflow**

**OV1821-6-1** 1 hole, centered

**OV1821-6-3** 3 hole, 4" centerset

Gauge 18

Outside dimensions **18 x 21"**

Inside bowl **11 7/16 x 18 x 6"**


Mirror finished rim, #4 satin finished bowl

Integral **overflow** at front of bowl

Accepts 1 1/4" (32 mm) overflow waste assembly, not included

Waste location **Center back**

**\$ 769**

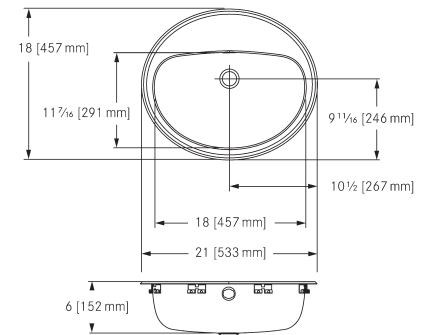

**With ledge, 6" deep, no overflow**

**V1821-6-1** 1 hole, centered

**V1821-6-3** 3 hole, 4" centerset

Gauge 18

Outside dimensions **18 x 21"**


Inside bowl **11 7/16 x 18 x 6"**

Mirror finished rim, #4 satin finished bowl

Accepts 1 1/4" (32 mm) waste assembly, not included

Waste location **Center back**

**\$ 713**

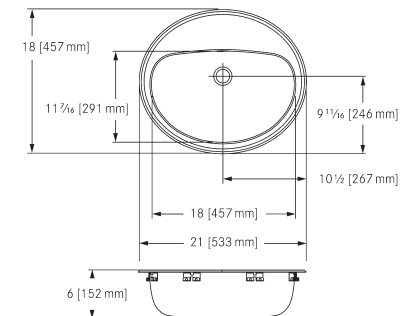



## Vanity basin undermount



### Undermount, rectangular, overflow OWB1119U-5

Gauge **18**

Outside dimensions **11 x 19"**

Inside bowl **9 x 17 x 4 1/2"**




#4 satin finished bowl

Integral **overflow** at front of bowl

Accepts 1 1/4" (32 mm) overflow waste  
assembly, not included

Waste location **Center back**

**\$ 1,156**

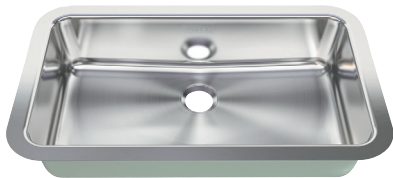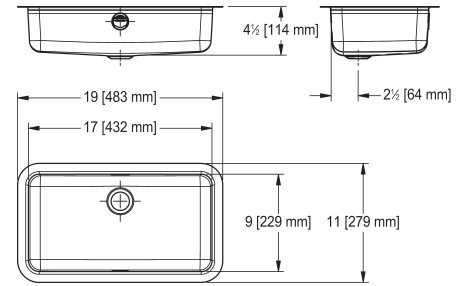

### Undermount, rectangular, no overflow WB1119U-5

Gauge **18**

Outside dimensions **11 x 19"**


Inside bowl **9 x 17 x 4 1/2"**

#4 satin finished bowl

Accepts 1 1/4" (32 mm) waste assembly, not  
included

Waste location **Center back**

**\$ 1,222**

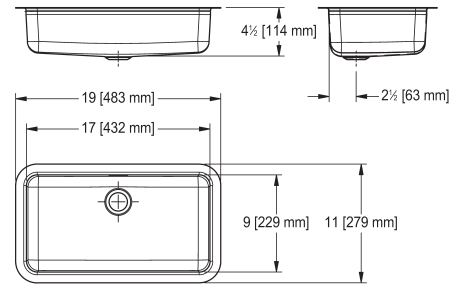

### Undermount, U-shaped, overflow OWB1420U-5

Gauge **18**

Outside dimensions **14 x 20"**

Inside bowl **12 x 18 x 4 1/2"**


#4 satin finished bowl

Integral **overflow** at back of bowl

Accepts 1 1/4" (32 mm) overflow waste  
assembly, not included

Waste location **Center back**

**\$ 1,120**

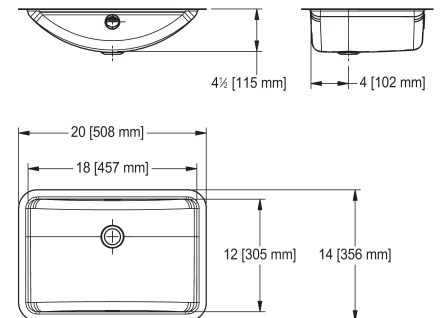

### Undermount, U-shaped, no overflow WB1420U-5

Gauge **18**

Outside dimensions **14 x 20"**


Inside bowl **12 x 18 x 4 1/2"**

#4 satin finished bowl

Accepts 1 1/4" (32 mm) waste assembly,  
not included

Waste location **Center back**

**\$ 1,123**

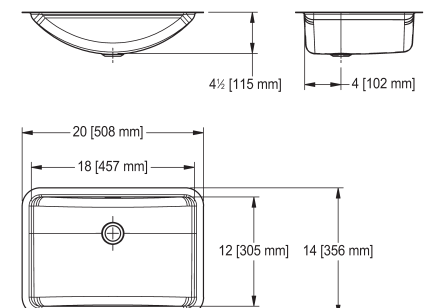

## Vanity basin undermount



### Undermount with overflow OV1317U-5

Gauge **18**

Outside dimensions **13 1/4 x 17 7/16"**

Inside bowl **10 15/16 x 15 3/16 x 5"**


#4 satin finished bowl

Integral **overflow** at back of bowl

Accepts 1 1/4" (32 mm) overflow waste  
assembly, not included

Waste location **Center back**

**\$ 810**

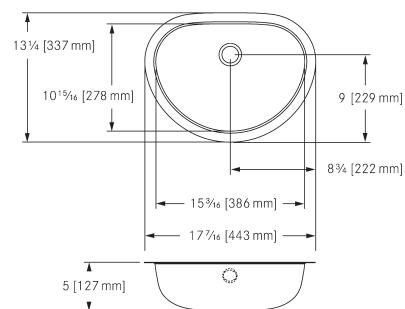

### Undermount with overflow OV1420U-5

Gauge **18**

Outside dimensions **13 11/16 x 20 1/4"**

Inside bowl **11 7/16 x 18 x 5"**


#4 satin finished bowl

Integral **overflow** at back of bowl

Accepts 1 1/4" (32 mm) overflow waste  
assembly, not included

Waste location **Center back**

**\$ 1,013**

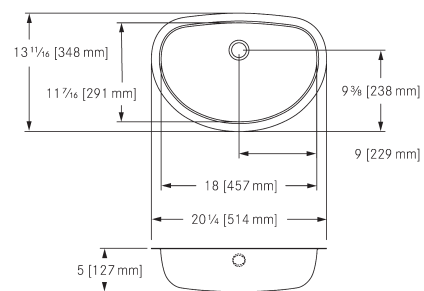



# Healthcare



Pictured: HWSS2321W-00 Medi-flo sink

49	Medi-flo healthcare sink
50	Ozo-flo faucets
51	Medi-flo & Ozo-flo accessories
52	Nightingale hand hygiene sinks
55	Premium surgical scrub sinks
56	Classic surgical scrub sinks
57	Premium surgical scrub sinks bundles
58	Clinical wash basins
60	Dual mount healthcare sinks

# Medi-flo hand hygiene sink with integrated spout

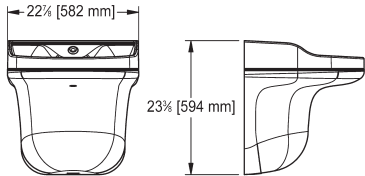

## Patient room sink with integrated spout for infection control

### HWSS2321W-00

Wall mount healthcare sink with laminar flow spout with integrated electrochemical water disinfection technology. White solid surface hand hygiene sink with removable shroud. Left rear 1 1/2" (DN 40) waste location to prevent water from splashing directly into the waste. An anti-splash feature runs through the center of the sink to greatly reduce splashing. Infrared controls trigger an illuminated laminar flow stream delivering water with dissolved ozone and other mixed oxidants on demand. Flow rate is 5.7 Lpm/1.5 gpm.

Recommended for areas with normal water conductivity above 75 TDS. If unaware of your local water conductivity, please contact customer service and this can easily be determined for you. Recommended water temperature is between 80-95°F (27-35°C). Hand hygiene sinks are specifically designed for hand washing only. They are not recommended as a drinking source, for washing utensils or for draining of medical bags or bedpans.

A plug-in transformer required for generation of mixed oxidants is included. Medi-flo is cUPC certified and is compliant with CSA B45.5-11/IAPMO Z124-2011 and IGC156-2012el. Meets and exceeds various national healthcare standards; ie, Z317/CSAZ8000. Wheelchair accessible: meets ADA, ANSI A117.1 and CSA B651-04. Patent Pending.

Optional: Pre-set thermostatic mixing valve **MEDI-MIX**.

Optional: In-wall carrier **IWC2104** for quicker installation.

\$ 3,831




## Medi-flo splash reduction features

- Side splashes to prevent water from splashing out of the sink
- Laminar flow spout
- Infrared sensor turns water on when user places hands inside sink
- Center rib diverts water flow from faucet
- Integral waste, offset drain in rear left position

## Laminar flow spout reduces splashing

Medi-flo delivers water in a laminar flow stream. Laminar flow occurs when water molecules move in an orderly, straight line for a turbulence-free stream.

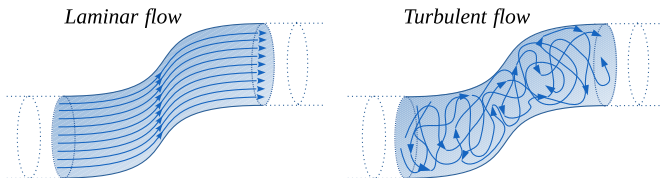

## Efficacy of electrochemical water disinfection

Pathogen	Efficacy	Contact time	Source
Candida auris	99.9%	10 minutes	Cleveland VA Medical Center
C. difficile spores	64%	20 seconds	EMSL Canada Inc.
Klebsiella pneumoniae	99.99%	30 seconds	EMSL Canada Inc.
Legionella pneumophila	99.99%	5 minutes	EMSL Canada Inc.
MRSA	99.9%	10 minutes	Cleveland VA Medical Center
Pseudomonas	99.9%	10 minutes	Cleveland VA Medical Center

Time kill studies performed by 3rd party laboratories show that electrochemical water disinfection can be effective at reducing certain waterborne pathogens.



## Ozo-flo laminar flow healthcare faucets

Ozo-flo hands-free clinical faucets are ideal for new or retrofit applications where hand wash sinks can benefit from added infection control. The addition of ozone and other mixed oxidants to the water will help keep the sink and waste free of biofilms and bacteria. Faucets are fabricated from Type 316 stainless steel and feature a blue illumination ring indicating activation of ozonation cycle. Control features include a post-wash cycle of 3 seconds to wash soap residue and bacteria down the drain. A daily purge cycle prevents water from stagnating in the drain lines for continuous waste disinfection.



### Ozo-flo touch free faucet, wall mount HWF05

Front to back  $7 \frac{5}{8}$ "

Diameter  $1 \frac{1}{2}$ "


Hands free operation

**Laminar flow** 5.7 Lpm/1.5 gpm

Includes ozone generator unit with plug-in transformer.

Requires thermostatic mixing valve, not included. Recommended: MEDI-MIX.

Certified to ASME A112.18.1/B125.1, UL1951, UL979 for ozone features, and CSA C22.2, Numbers 68 and 14.



**\$ 3,134**



### Ozo-flo touch free faucet, deck mount, angled HWF23

Front to back  $6 \frac{11}{16}$ "


Height  $5 \frac{13}{16}$ "

**Laminar flow** 5.7 Lpm/1.5 gpm

Includes ozone generator unit with plug-in transformer.

Requires thermostatic mixing valve, not included. Recommended: MEDI-MIX.

Certified to ASME A112.18.1/B125.1, UL1951, UL979 for ozone features, and CSA C22.2, Numbers 68 and 14.

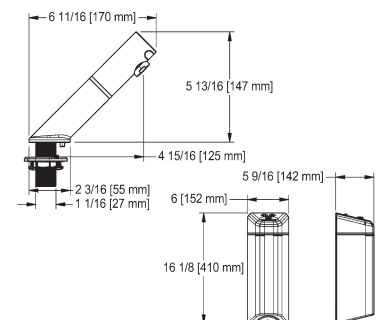

**\$ 3,168**



### Ozo-flo touch free faucet, deck mount, high neck angled HWF43

Front to back  $8 \frac{7}{8}$ "


Height  $10 \frac{3}{16}$ "

**Laminar flow** 5.7 Lpm/1.5 gpm

Includes ozone generator unit with plug-in transformer.

Requires thermostatic mixing valve, not included. Recommended: MEDI-MIX.

Certified to ASME A112.18.1/B125.1, UL1951, UL979 for ozone features, and CSA C22.2, Numbers 68 and 14.



**\$ 3,339**

## Accessories for Medi-flo & Ozo-flo



### Mixing valve

#### MEDI-MIX

Optional thermostatic mixing valve pre-programmed for Medi-flo HWSS2321W-00 sink and Ozo-flo faucets HWF05, HWF23, and HWF43. Adjustable outlet temperature range: 95 – 118°F (35 – 48°C). Factory set temperature 95°F (40°C).

**\$ 234**



### Replacement shroud for Medi-flo

#### MEDI-SHR

Removable replacement shroud for HWSS2321W-00. White polymer composite material.

**\$ 315**




### In-wall carrier for Medi-flo

#### IWC2104

Floor mounted in-wall carrier designed for Medi-flo (HWSS2321W-00) sink. Preset stud locations simplify installation. Steel uprights with welded feet. Integrated rough in box. Hardware included.




**\$ 335**

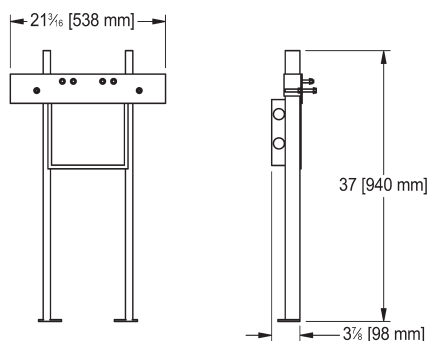

# Nightingale Sinks



Pictured: AHWSS1720W-G Nightingale sink with faucet



## Hand hygiene sink AHWSS1720W-00

White solid surface hand hygiene sink with removable shroud. Sink is made of non-porous cast material with antimicrobial resin. An anti-splash feature runs through the center of the sink to greatly reduce splashing. Bowl is sloped towards drain and the sink rim is shaped to prevent users from placing objects on it. Hand hygiene sinks are specifically designed for hand washing only. Accepts single hole faucets with lower mounting hardware less than 2 1/2" (63 mm) in diameter.

Left rear 1 1/2" (DN 40) waste location supplied with grid waste. Sink is cUPC certified and compliant with CSA B45.5-11/IAPMO Z124-2011. Meets and exceeds various national healthcare standards; ie, CSAZ8000, CSAZ317.1-16. Wheelchair accessible: meets ADA, ANSI A117.1 and CSA B651-04 (check local codes to ensure compliance).

Outside dimensions **16 15/16 x 20 1/8 x 21 1/2"**

Inside bowl **15 1/4 x 18 5/8 x 9"**

Waste location **Left Rear**

**\$1,614**

## Optional Accessories


### IWC2203

In-wall carrier

See details on p. 59



## Nightingale patient room sinks

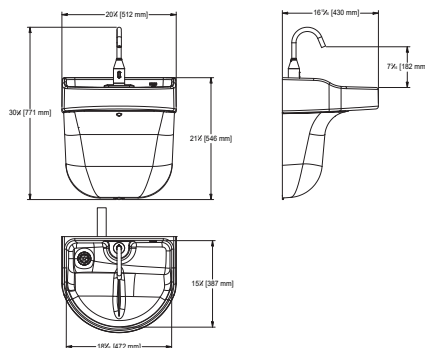

### Hand hygiene sink with hands-free gooseneck faucet AHWSS1720W-G

White solid surface hand hygiene sink with removable shroud. Sink is made of non-porous cast material with antimicrobial resin. An anti-splash feature runs through the center of the sink to greatly reduce splashing. Bowl is sloped towards drain and the sink rim is shaped to prevent users from placing objects on it. Hand hygiene sinks are specifically designed for hand washing only.

Left rear 1 1/2" (DN 40) waste location supplied with grid waste.

Hands free gooseneck **faucet** included. Faucet can be powered with included plug in transformer or with included battery pack which will last approximately 100,000 cycles on 4 x AA batteries (AC or DC or AC with battery backup). Flow rate 6 Lpm (1.5gpm) laminar flow.

Faucet is certified to ASME A112.18.1/CSA B125.1.

Sink is cUPC certified and compliant with CSA B45.5-11/IAPMO Z124-2011. Meets and exceeds various national healthcare standards; ie, CSAZ8000, CSAZ317.1-16.

Wheelchair accessible: meets ADA, ANSI A117.1 and CSA B651-04 (check local codes to ensure compliance).

Outside dimensions **16 15/16" x 20 1/8" x 30 3/8"**

Inside bowl **15 1/4" x 18 5/8" x 9"**

Waste location **Left Rear**

**\$1,774**



### Optional Accessories

#### IWC2203

In-wall carrier

See details on p. 59





# Nightingale patient room sinks



## Hand hygiene sink with hands-free faucet AHWSS1720W-T

White solid surface hand hygiene sink with removable shroud. Sink is made of non-porous cast material with antimicrobial resin. Hand hygiene sinks are specifically designed for hand washing only. An anti-splash feature runs through the center of the sink to greatly reduce splashing. Bowl is sloped towards drain and the sink rim is shaped to prevent users from placing objects on it.

Left rear 1 1/2" (DN 40) waste location supplied with grid waste.

Hands free **faucet** included with user temperature control. Faucet can be powered with included plug in transformer or with included battery pack which will last approximately 100,000 cycles on 4 x AA batteries (AC or DC or AC with battery backup). Flow rate 5.7 Lpm (1.5 gpm).

Faucet is certified to ASME A112.18.1/CSA B125.1.

Sink is cUPC certified and compliant with CSA B45.5-11/IAPMO Z124-2011. Meets and exceeds various national healthcare standards; ie, CSAZ8000, CSAZ317.1-16.




Wheelchair accessible: meets ADA, ANSI A117.1 and CSA B651-04 (check local codes to ensure compliance).

Outside dimensions **16 15/16 x 20 1/8 x 26"**

Inside bowl **15 1/4 x 18 5/8 x 9"**

Waste location **Left Rear**

**\$1,818**

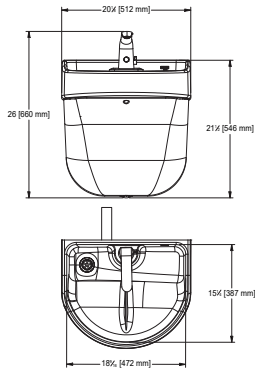

## Optional Accessories

### IWC2203

In-wall carrier

See details on p. 59



## Premium surgical scrub units



### Premium surgical scrub sink, 16" wide SSU1-2016-3

16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Radius coved bowl corners. Access panel for service and maintenance. Integral 1 1/2" (38 mm) waste with threaded tailpiece for use with McGuire 155WC tailpiece.


Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **19 3/4 x 16 x 28"**

Inside bowl **15 x 13 x 10"**

Waste location **Center**

**\$ 8,950**

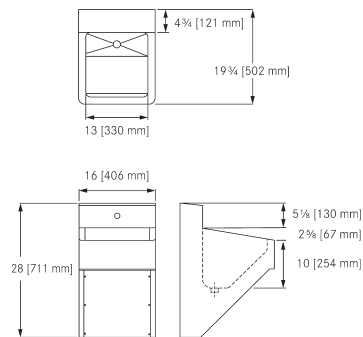

### Premium surgical scrub sink, 20" wide SSU1-2020-3

16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Radius coved bowl corners. Access panel for service and maintenance. Integral 1 1/2" (38 mm) waste with threaded tailpiece for use with McGuire 155WC tailpiece.



Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **19 3/4 x 20 x 28"**

Inside bowl **15 x 17 x 10"**

Waste location **Center**

**\$ 9,206**

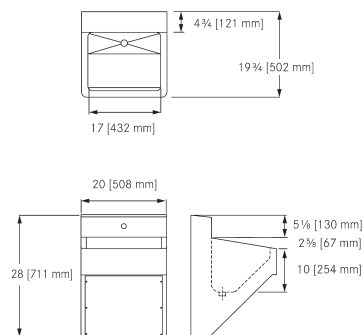

### Premium surgical scrub sink, 40" wide SSU2-2040-3

16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Radius coved bowl corners. Divider is removable for thorough cleaning. Access panel for service and maintenance. Integral 1 1/2" (38 mm) waste with threaded tailpiece for use with McGuire 155WC tailpiece.


Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **19 3/4 x 40 x 28"**

Inside bowl **15 x 18 7/16 x 10"**

Waste location **Center**

**\$ 12,531**

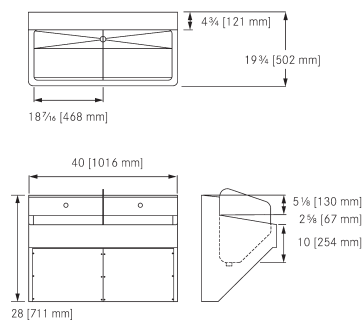


## Classic surgical scrub sinks



### Classic scrub sink, single SSU1-00

Single compartment surgical scrub station. 16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Bowl slopes from 10" to 12" from right to left. Access panel for service and maintenance. Franke hygienic 1 1/2" (38 mm) offset waste with integral tailpiece (no separate waste fitting required). Supplied with wall hanger brackets. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **23 x 30 x 26"**  
Inside bowl **17 1/2 x 27 x 12"**  
Waste location **Left Back**

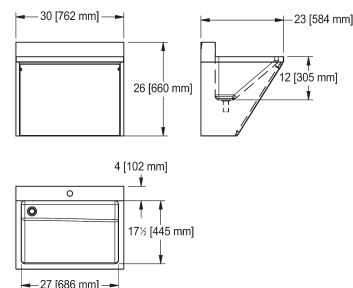


**\$ 6,083**



### Classic scrub sink, double SSU2-00

Double compartment surgical scrub station. 16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Bowl slopes from 12" to 14" from right to left. Removable divider with no tracks in bowl. Access panel for service and maintenance. Franke hygienic 1 1/2" (38 mm) offset wastes with integral tailpieces (no separate waste fittings required). Supplied with wall hanger brackets. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **23 x 60 x 26"**  
Inside bowl **17 1/2 x 57 x 14"**  
Waste locations **Left and Center**

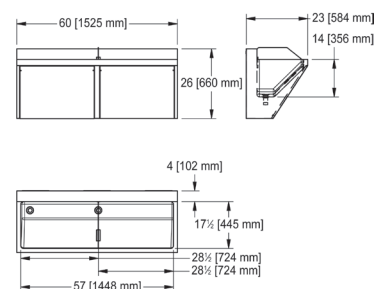


**\$ 7,076**



### Classic scrub sink, triple SSU3-00

Triple compartment surgical scrub station. 16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Bowl slopes from 10" to 14" from right to left. Removable dividers with no tracks in bowl. Access panel for service and maintenance. Franke hygienic 1 1/2" (38 mm) offset wastes with integral tailpieces (no separate waste fittings required). Supplied with wall hanger brackets. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **23 x 90 x 26"**  
Inside bowl **17 1/2 x 87 x 14"**  
Waste location **Left, Center and Center**

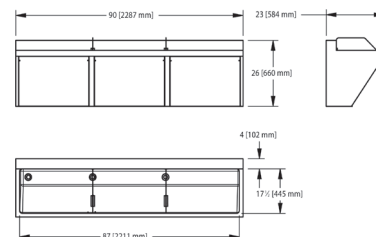

**\$ 14,831**

# Classic surgical scrub sink bundles with valves and hands-free faucets



## Classic scrub sink bundle, single SSU1-10

Single compartment surgical scrub station. 16 gauge (1.5 mm), type 304 stainless steel. Polished #4 satin finish. Radius coved bowl corners. Bowl slopes from 10" to 12" from right to left. Access panel for service and maintenance.

Franke hygienic 1 1/2" (38 mm) offset waste with integral tailpiece (no separate waste fitting required). Supplied with wall hanger brackets.

Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Outside dimensions **23 x 30 x 26"**


Inside bowl **17 1/2 x 27 x 12"**

Waste location **Left Back**

Sink bundle includes:

1 - **MIX-LF** thermostatic mixing valve

1 - **HHF180-6L** gooseneck hands-free faucet

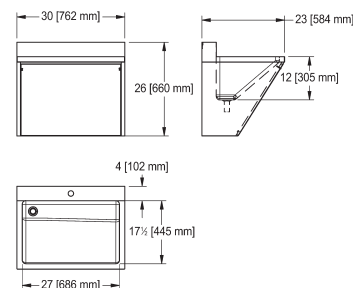

**\$ 7,063**



## Classic scrub sink bundle, double SSU2-10

Double compartment surgical scrub station. 16 gauge (1.5 mm), type 304 stainless steel. Polished #4 satin finish. Radius coved bowl corners. Bowl slopes from 12" to 14" from right to left. Removable divider with no tracks in bowl. Access panel for service and maintenance.

Franke hygienic 1 1/2" (38 mm) offset wastes with integral tailpieces (no separate waste fittings required). Supplied with wall hanger brackets.

Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Outside dimensions **23 x 60 x 26"**


Inside bowl **17 1/2 x 57 x 14"**

Waste locations **Left and Center**

Sink bundle includes:

2 - **MIX-LF** thermostatic mixing valves

2 - **HHF180-6L** gooseneck hands-free faucets

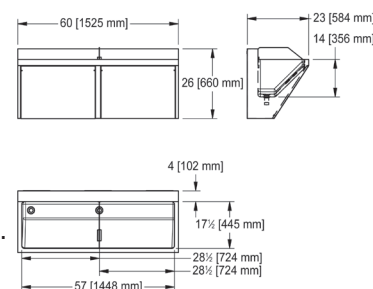

**\$ 9,048**



## Classic scrub sink bundle, triple SSU3-10

Triple compartment surgical scrub station. 16 gauge (1.5 mm), type 304 stainless steel. Polished #4 satin finish. Radius coved bowl corners. Bowl slopes from 10" to 14" from right to left. Removable dividers with no tracks in bowl. Access panel for service and maintenance.

Franke hygienic 1 1/2" (38 mm) offset wastes with integral tailpieces (no separate waste fittings required). Supplied with wall hanger brackets.

Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Outside dimensions **23 x 90 x 26"**


Inside bowl **17 1/2 x 87 x 14"**

Waste location **Left, Center and Center**

Sink bundle includes:

3 - **MIX-LF** thermostatic mixing valves

3 - **HHF180-6L** gooseneck hands-free faucets

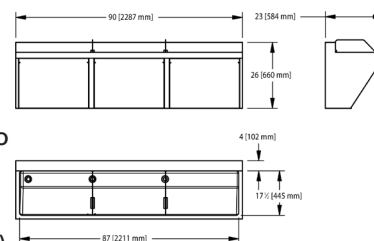

**\$ 17,365**



## Clinical Wash Basins



### Clinical wash basin, for splash mount faucet HWSS1518P-00

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Constructed with an integral shroud. High back and side walls contain splashing and protect adjacent surfaces from contamination.

Integral 1 1/2" (38 mm) waste welded to bottom of the sink bowl. Waste is left open and shaped to prevent the insertion of plugs or strainers to comply with national healthcare guidelines.

This fixture has antimicrobial nanocoating product protection on all exposed surfaces of the sink.

Recommended splash mount faucet **HHF180-6L-W**.

Certified to ASME A112.19.3/CSA B45.4.


Z8000 compliant.

Outside dimensions **18 x 15 x 28 5/8"**

Inside bowl **14 x 14 x 10"**

Waste location **Right Back**

**\$2,044**

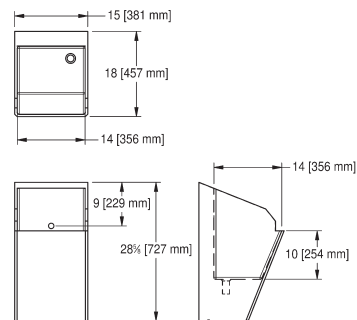

### Clinical wash basin, dual mount faucet options HWS1414P-00

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Constructed with an integral shroud. High back and side walls contain splashing and protect adjacent surfaces from contamination.

Integral 1 1/2" (38 mm) waste welded to bottom of the sink bowl. Waste is left open and shaped to prevent the insertion of plugs or strainers to comply with national healthcare guidelines.

This fixture is coated with antimicrobial product protection on all exposed surfaces of the sink.

Recommended deck mount faucet **HHF180-6L**.

Certified to ASME A112.19.3/CSA B45.4.


Z8000 compliant.

Outside dimensions **18 3/4 x 15 x 18 1/2"**

Inside bowl **14 x 14 x 10"**

Waste locations **Left Back**

**\$2,170**

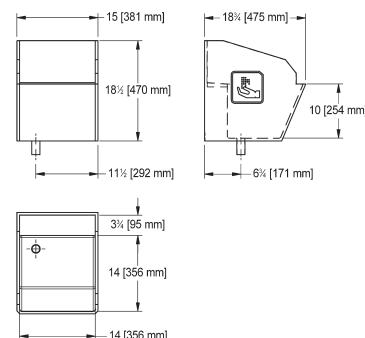


### Shroud for HWS1414P-00 & HWSS1518P-00 HWS-RS-00

Stainless steel removable shroud for HWS1414P-00 hand wash basin.

Overall dimensions **13 1/2 x 14 1/2 x 10"**

**\$338**



## Clinical Wash Basins



### Clinical wash basin, large backsplash HWS1420P-00

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Offset waste with open access to allow for easy cleaning of P-Trap. Integral 1 1/2" (38 mm) waste welded to bottom of the sink bowl.


This fixture is coated with antimicrobial product protection on all exposed surfaces of the sink. Recommended deck mount faucet **HHF180-6L**. Certified to ASME A112.19.3/CSA B45.4. Z8000 compliant.

Outside dimensions **19 3/16" x 21" x 37 15/16"**

Inside bowl **14" x 20" x 10"**

Waste location **Left Back**

**\$ 3,430**

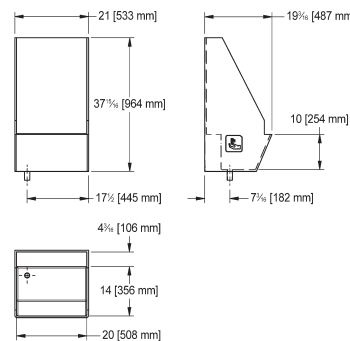

### Clinical wash basin, wheelchair accessible AWHB1414P-3

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Offset waste with open access to allow for easy cleaning of P-Trap. Integral 1 1/2" (38 mm) waste welded to bottom of the sink bowl.

Wheelchair accessible: meets ADA, ANSI A117.1.

Certified to ASME A112.19.3/CSA B45.4.


Z8000 compliant.

Outside dimensions **17 9/16" x 14 5/16" x 15 1/16"**

Inside bowl **14 3/8" x 14" x 9 1/16"**

Waste location **Left Back**

**\$ 6,131**

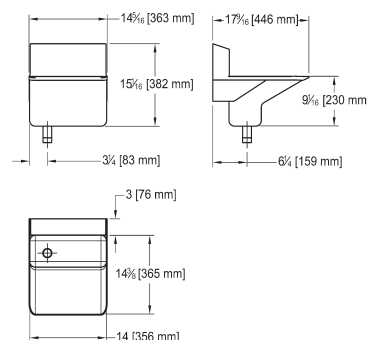

### In-wall carrier for wall hung basins IWC2203

Universal floor mounted in-wall carrier designed for wall hung basins and water coolers.


Steel uprights with welded feet.

Includes lower bracket for added support.


Mounting hardware included.

Outside dimensions **7 7/16" x 23 7/8" x 42"**

**\$ 335**

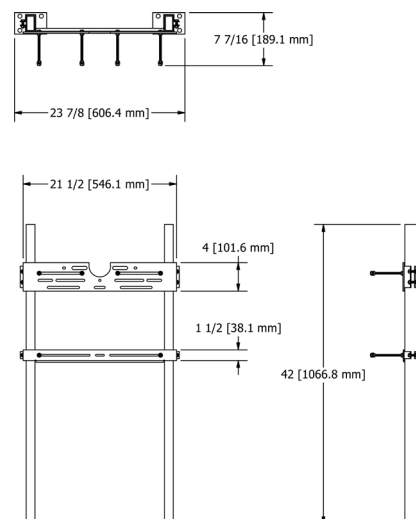

## Dual mount medical hand wash sinks

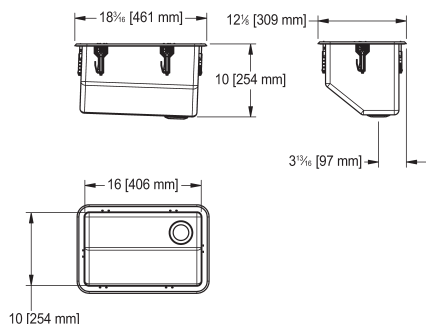

### Topmount or undermount single bowl medical hand wash sink HWS0610P-3

Single compartment self rimming topmount (or undermount) medical hand wash sink with faucet ledge. 18 gauge (1.2 mm), type 304 stainless steel. Sink compartment is angled to reduce splashing and waste is offset to reduce the risk of any bacteria contamination and splashing. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, sound deadening pads, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.

Right rear waste location. Includes 1 1/2" (38 mm) duplex waste assembly and 1 1/2" (DN38) tailpiece.


Custom, non-returnable

Outside dimensions **12 1/8 x 18 3/16"**

Inside bowl **10 x 16 x 10"**

Waste location **Right rear**

**\$ 727**



### Topmount or undermount single bowl medical hand wash sink with faucet ledge HWS6810P-3

Single compartment self rimming topmount (or undermount) medical hand wash sink with faucet ledge. 18 gauge (1.2 mm), type 304 stainless steel. Sink compartment is angled to reduce splashing and waste is offset to reduce the risk of any bacteria contamination and splashing. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, sound deadening pads, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.

Right rear waste location. Includes 1 1/2" (38 mm) duplex waste assembly and 1 1/2" (DN38) tailpiece.

Custom, non-returnable.

Outside dimensions **21 1/2 x 20"**

Inside bowl **16 x 18 x 10"**

Waste location **Right rear**

**\$ 973**




# Hand Wash Basins



Pictured: AWHBS2419-7 basins with HHF23T faucets



## Designer, semi-public hand wash basins

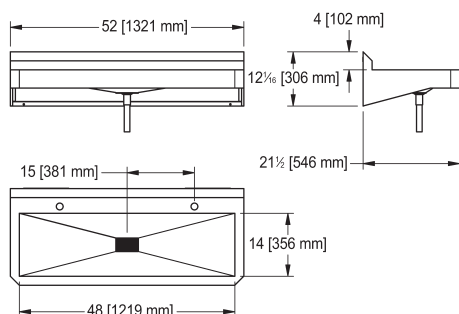

### Designer double hand wash basin WHB5222-7

Designer wall hung basin. 16 gauge (1.8 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are polished to a #4 satin finish. Accepts 1 1/4" (DN 32) waste fitting, not included. Features a vandal-resistant laser cut pyramid waste cover. Unit is installed using supplied wall brackets. Certified to ASME A112.19.3/CSA B45.4.

Optional wall carrier **IWC2203** is available.

#### Optional shroud **WHB5222-RS**

Wheelchair accessible: meets ADA (Americans with disabilities act guidelines), ANSI A117.1 (Accessible and usable buildings and facilities), and CSA B651-04. Check local codes to ensure compliance.

Outside dimensions **21 1/2 x 52 x 12 1/16"**

Inside bowl **21 1/2 x 48 x 5"**

Waste location **Center**

**\$ 3,063**



### Removable shroud for WHB5222-7 WHB5222-RS

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Satin finish.

Shroud extends 20 9/16" below the bottom of the basin.

Outside dimensions **21 5/16 x 7 x 20 5/8"**

**\$ 282**

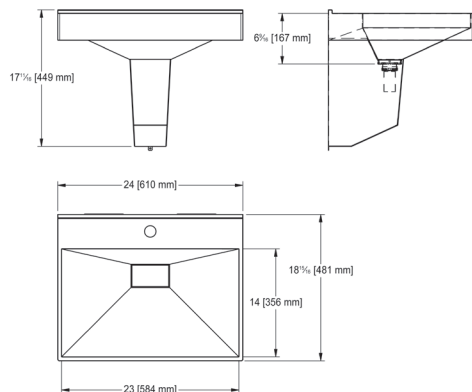

### Cleopatra single bowl hand wash basin AWHBS2419-7

Designer wall hung basin. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are polished to a #4 satin finish. Basin features vandal-resistant waste cover attached via concealed cable. Integral grid waste opening and threaded connection underneath to accept a 1 1/2" tailpiece (included). Separate waste fitting not required.

Basin is installed using supplied wall brackets, recommended in-wall carrier IWC2203 sold separately.

Certified to ASME A112.19.3/CSA B45.4. Wheelchair accessible: meets ADA (Americans with Disabilities Act) guidelines, ANSI A117.1 (Accessible and usable buildings and facilities), and CSA B651-04 (Accessible design for the built environment). Check local codes to ensure compliance.

Outside dimensions **18 15/16 x 24 x 17 11/16"**

Inside bowl **16 x 14 x 6 9/16"**

Waste location **Center back**

**\$ 1,604**




#### Optional wall carrier

#### **IWC2203**

In-wall carrier

See details on p. 59





### Wheelchair accessible wall hung basin **AWHB2220W-3-1**

Single wash basin made from a unique Franke resin-bonded solid surface material with pore-free, smooth UV resistant gelcoat with high-polish surface. Shallow basin featuring a splash reduction rib. 1 1/2" grid waste included. Unit is installed using supplied wall hanger brackets.

Optional in-wall carrier IWC2203 is available.

cUPC certified and compliant with CSA B45.5- 11/IAPMO Z124-2011.

Wheelchair accessible: meets ADA (Americans with Disabilities Act), ANSI A117.1 (Accessible and usable buildings and facilities) and CSA B651-04 (check local codes to ensure compliance).

Outside dimensions **18 15/16 x 24 x 17 11/16"**

Inside bowl **16 x 14 x 6 9/16"**

Waste location **Center back**

**\$1,349**

### Optional wall carrier

#### **IWC2203**

In-wall carrier

See details on p. 59




## Designer, semi-public hand wash basins



### Designer hand wash basin, no overflow WHB2221-7

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finish. Designed for either new installation or replacement/retrofit onto select vitreous china wall carriers. Edge is formed as an anti-spill rim. Includes one piece wall hanger bracket. 1 1/4" (32 mm) grid strainer waste kit included. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **20 15/16" x 21 1/2" x 11 1/4"** Inside bowl **13 x 14 1/2" x 5"** Waste location **Center back** Overflow **No**


**\$1,934**

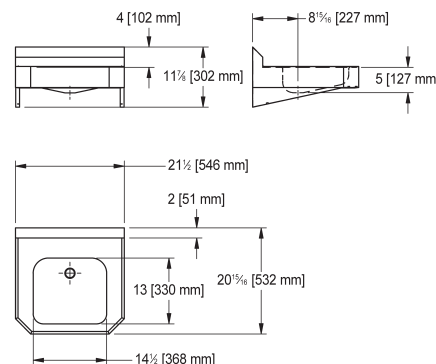

### Designer hand wash basin, with overflow WHB2221-8

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finish. Designed for either new installation or replacement/retrofit onto select vitreous china wall carriers. Edge is formed as an anti-spill rim. Includes one piece wall hanger bracket. Accepts 1 1/4" (32 mm) waste kit with overflow (not included). Order model #3700. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **20 15/16" x 21 1/2" x 11 1/4"** Inside bowl **13 x 14 1/2" x 5"** Waste location **Center back** Overflow **Yes**



**\$2,066**

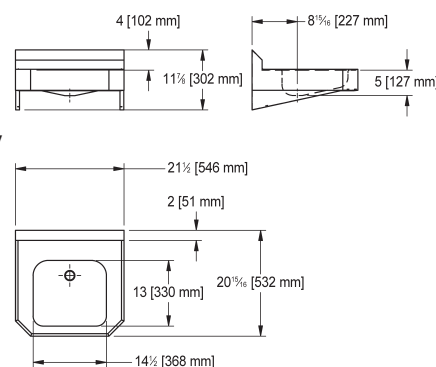

### Removable shroud for WHB2221 basins WHB2221-RS

Gauge 18  
Satin finish Stainless Steel  
Outside dimensions **11 1/4" x 8" x 14 7/8"**

**\$282**



### Cover plate for WHB2221-RS shroud WHB2221-UC

Bottom cover plate for WHB2221-RS shroud prevents unwanted access to plumbing fixtures. Overall dimensions **21 x 21"**

**\$283**





## Designer, semi-public hand wash basins



### Designer basin WT400C-7

Designer single wash basin for wall mounting.  
19 gauge (1.0 mm) seamless welded bowl. Front panel has 45° corner edges.

Exposed surfaces are polished to a satin finish.

Accepts 1 1/4" (32 mm) waste kit, not included.

Basin is installed using prewelded mounting brackets.

Optional shroud **WT-RS** available.



Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **17 13/16 x 15 3/4"**

Inside bowl **12 x 13 3/8 x 5 9/16"**

Waste location **Center back**

**\$ 978**



### Corner wall mount hand wash basin WT310E-7

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel.

Exposed surfaces are brushed finish.

Includes installation kit.

Accepts 1 1/4" (32 mm waste kit), not included.



Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **12 3/16 x 12 3/16"**

Inside bowl **6 1/8 x 11 7/16 x 4 3/4"**

Waste location **Center**

**\$ 745**



### Designer basin WT500C-7

Designer single wash basin for wall mounting.  
19 gauge (1.0 mm) seamless welded bowl.

Front panel has 45° corner edges.

Exposed surfaces are polished to a satin finish.

Accepts 1 1/4" (32 mm) waste kit, not included.

Basin is installed using prewelded mounting brackets.

Optional shroud **WT-RS** available.



Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **17 9/16 x 19 11/16"**

Inside bowl **11 7/16 x 15 3/4 x 5 9/16"**

Waste location **Center back**

**\$ 1,096**







## Designer, semi-public hand wash basins



### Designer basin WT600C-7

Designer single wash basin for wall mounting.  
19 gauge (1.0 mm) seamless welded bowl.  
Front panel has 45° corner edges.  
Exposed surfaces are polished to a satin finish.  
Accepts 1 1/4" (32 mm) waste kit, not included.  
Basin is installed using prewelded mounting brackets.  
Wheelchair accessible.  
Optional shroud **WT-RS** available.  
Certified to ASME A112.19.3/CSA B45.4.  
Outside dimensions **18 7/8 x 23 5/8"**  
Inside bowl **13 3/8 x 21 1/4 x 5 3/4"**  
Waste location **Center back**


**\$ 1,185**

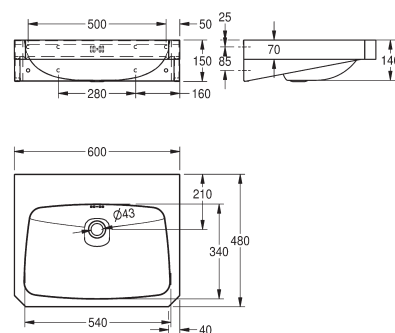

### Shroud for WT400C/WT500C/WT600C basins WT-RS

Trap cover manufactured from 18 gauge, type 304 stainless steel. Exposed surfaces are satin finished. For wall mount installation of wash basin models WT400C, WT500C, WT600C and WHB1617 series.  
Outside dimensions **10 1/2 x 6 1/2 x 15 3/4"**

**\$ 666**

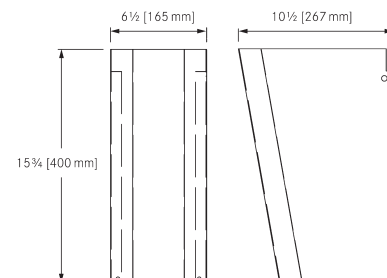


## Hand wash basins, institutional



### For wall mount faucet, 6" deep WHB1616-3

Gauge **18**  
Outside dimensions **16 1/4 x 17"**  
Inside bowl **12 x 14 x 6"**  
#4 satin finish  
Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper.  
One piece wall hanger included, separate sink carrier not required.  
Optional shroud **WT-RS** sold separately  
Waste location **Center back**

**\$ 900**

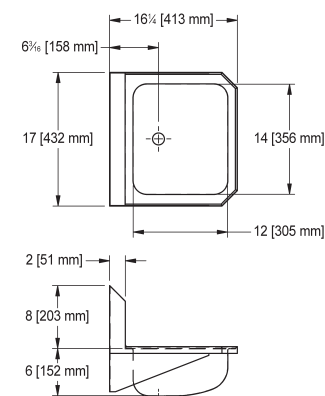



### Wall hung basin, 1 1/2" waste WHB1617-3

Gauge **18**

Outside dimensions **17 x 16 1/2"**

Inside bowl **12 x 14 x 6"**


#4 satin finish

Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper.

One piece wall hanger included, separate sink carrier not required.

Optional shroud **WT-RS** sold separately  
Waste location **Center back**

**\$ 899**

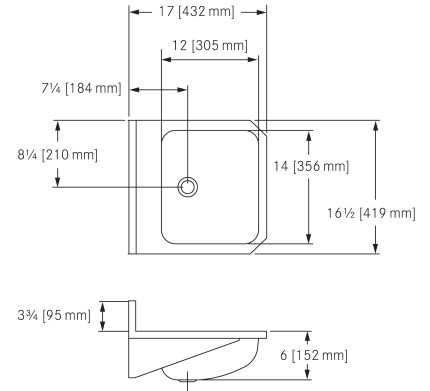

### Wall hung basin with overflow, 1 1/2" waste WHB1617-6

Gauge **18**

Outside dimensions **17 x 16 1/2"**

Inside bowl **12 x 14 x 6"**


#4 satin finish

Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper, tailpiece, and overflow.

One piece wall hanger included, separate sink carrier not required.

Optional shroud **WT-RS** sold separately  
Waste location **Center back**

**\$ 910**

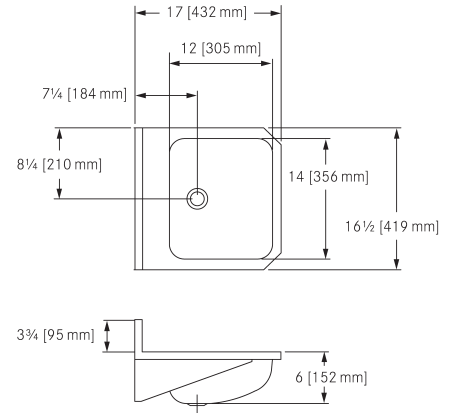

### Wall hung basin, 1 1/4" waste WHB1617-7

Gauge **18**

Outside dimensions **17 x 16 1/2"**


Inside bowl **12 x 14 x 6"**

#4 satin finish

Accepts 1 1/4" (32 mm) waste assembly, not included.

Optional shroud **WT-RS** sold separately  
Waste location **Center back**

**\$ 828**

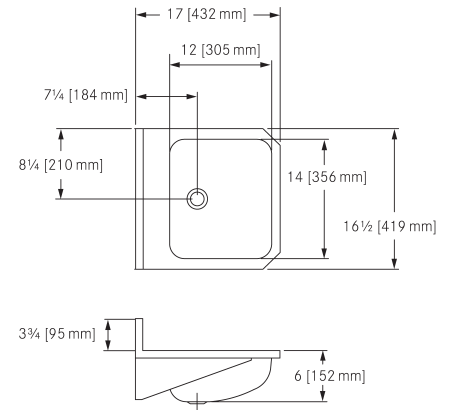

## Hand wash basins, institutional



### Wall hung basin, 1 1/2" waste WHB1819-3

Wash basin for wall mounting. 18 gauge (1.2 mm) stainless steel. Exposed surfaces are polished to a #4 satin finish.

Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper.

16 gauge side wall brackets and one piece wall hanger. Separate sink carrier is not required.


Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **19 x 18 1/2"**

Inside bowl **14 x 16 x 7"**

Waste location **Center**

**\$ 888**

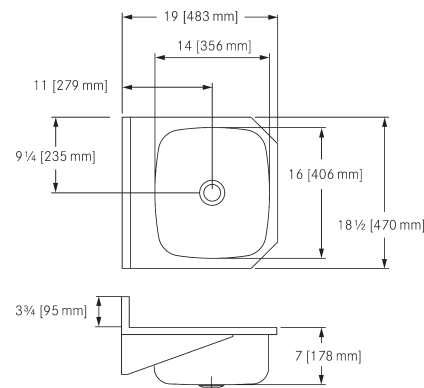

### Wall hung basin with overflow, 1 1/2" waste WHB1819-6

Wash basin for wall mounting. 18 gauge (1.2 mm) stainless steel. Exposed surfaces are polished to a #4 satin finish.

Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper, tailpiece and overflow.

16 gauge side wall brackets and one piece wall hanger. Separate sink carrier is not required.


Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **19 x 18 1/2"**

Inside bowl **14 x 16 x 7"**

Waste location **Center**

**\$ 1,007**

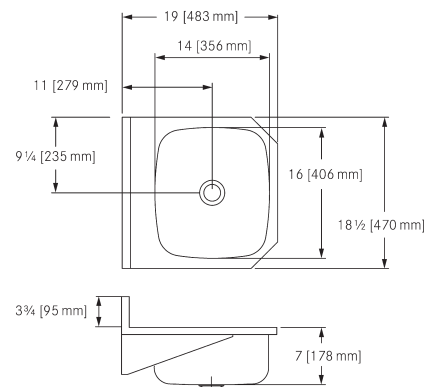

### Wall hung basin, 1 1/4" waste WHB1819-7

Wash basin for wall mounting. 18 gauge (1.2 mm) stainless steel. Exposed surfaces are polished to a #4 satin finish.

Accepts 1 1/4" (32 mm) waste assembly, not included.

16 gauge side wall brackets and one piece wall hanger. Separate sink carrier is not required.


Certified to ASME A112.19.3-2008 / CSA B45.4-08

Outside dimensions **19 x 18 1/2"**

Inside bowl **14 x 16 x 7"**

Waste location **Center**

**\$ 832**

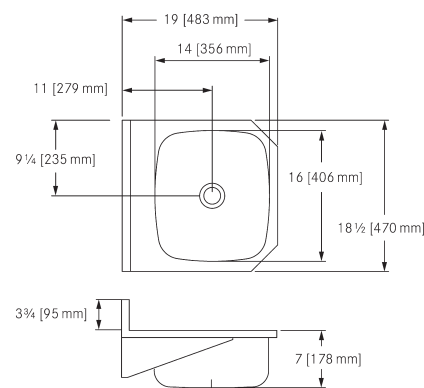

See page 77 for waste fittings

## Hand wash basins, institutional



### Hand wash basin with side side splashes WHB1716SPL-3

20 gauge (0.8 mm), type 302 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finish.

Radius coved bowl corners.

Includes one piece wall hanger bracket.


Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper.

Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **15 1/2" x 16 3/4" x 13"**

Inside bowl **9 1/4" x 12 x 6"**

Waste location **Center**

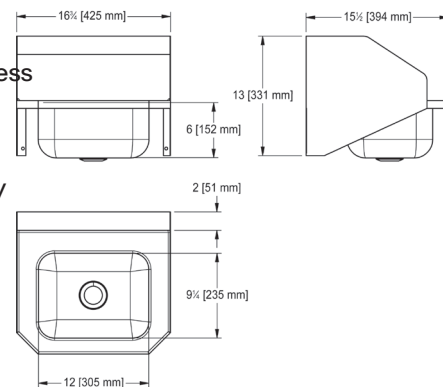

**\$ 931**



### Hand wash basin, 20 gauge WHB1716-3

20 gauge (0.8 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finish.

Radius coved bowl corners.

Includes one piece wall hanger bracket.


Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper.

Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **15 1/2" x 16 3/4" x 12 3/4"**

Inside bowl **9 1/4" x 12 x 6"**

Waste location **Center**

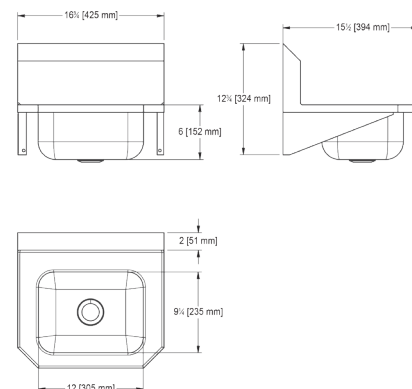

**\$ 891**



### Hand wash basin with shroud WHBS181910-3

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finish.

Includes one piece wall hanger bracket. Separate sink carrier not required.


Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper.

Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **19 x 16 x 14 1/2"**

Inside bowl **14 x 16 x 10"**

Waste location **Center**

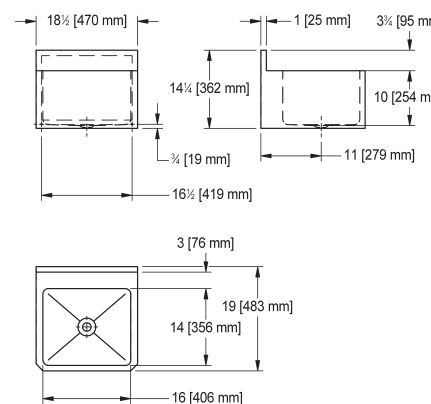

**\$ 3,511**



### Wall service sink, 14 gauge WSS6713

14 gauge (2.0 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finish.

Radius coved bowl corners.


Includes 3 1/2" (89 mm) crumb cup strainer waste kit with 1 1/2" tailpiece.

Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **19 x 20 x 25"**

Inside bowl **16 x 17 x 13"**

Waste location **Center**

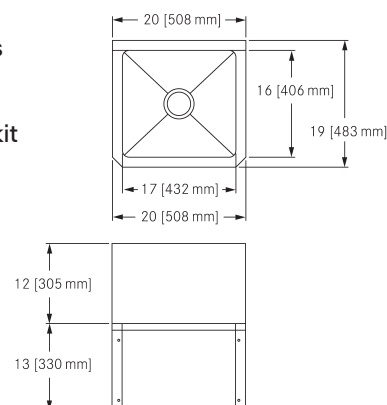

**\$ 5,664**




# Washroom Accessories



71	Faucets
73	Washroom accessories
74	Aqua-foam soap dispensers
75	Multi-feed soap dispensers

## Aquarius faucets



### Aquarius wall mount AC powered faucet

Polished finish, regular flow 5 Lpm/ 1.3 gpm

#### AT02-005AC


Type 316 stainless steel hands-free faucet. Wall mount installation, high polish finish.

AC plug-in power option.

Highly intelligent electronic controls with programmable sensor ranges, run times, and automatic purging to eliminate stagnant water. Certified to ASME A112.18.1 / CSA B125.1

Faucet dimensions **1 1/2 x 5 7/8"**

**\$1,177**

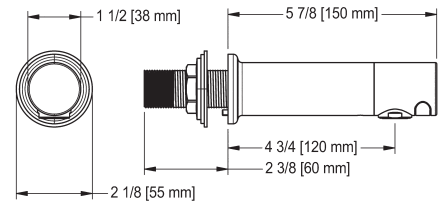

### Aquarius wall mount DC powered faucet

Polished finish, regular flow 5 Lpm/ 1.3 gpm

#### AT02-005DC


Type 316 stainless steel hands-free faucet. Wall mount installation, high polish finish.

DC battery power option.

Highly intelligent electronic controls with programmable sensor ranges, run times, and automatic purging to eliminate stagnant water. Certified to ASME A112.18.1 / CSA B125.1

Faucet dimensions **1 1/2 x 5 7/8"**

**\$1,226**

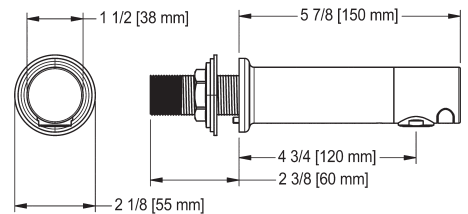

### Mixing valve

#### MIX-LF

Thermostatic mixing valve for use with Franke faucets.

**\$234**

## Faucets




### Electronic faucet, temperature adjust handle HHF23T

Hands free faucet for deck mounting with IR sensor near faucet base. 5.7 Lpm / 1.5gpm flow rate. Flat stop style with temperature adjust handle on side. Chrome finish.

Battery operated (DC) or plug in (AC) with battery backup. The battery life is around 100,000 cycles if running on battery only. Certified to ASME A112.18.1 / CSA B125.1

Faucet dimensions  $1\frac{5}{8} \times 7 \times 5\frac{7}{8}$ "

**\$ 702**

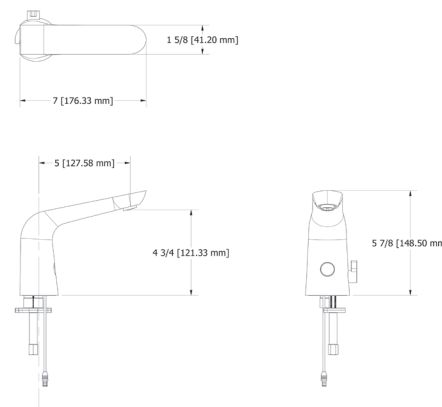

### Laminar flow deck mount faucet HHF180-6L

Hands free faucet for deck mounting with IR sensor. Open spout, free of flow control or aerators. Chrome finish.

6.0 Lpm/ 1.5 gpm laminar flow rate.



Supplied 6VDC plug in transformer included.

Easy topmount installation.

Automatic anti-vandal timeout. Certified to ASME A112.18.1 / CSA B125.

Overall dimensions  $2 \times 5\frac{1}{4} \times 10\frac{1}{4}$ "

**\$ 707**

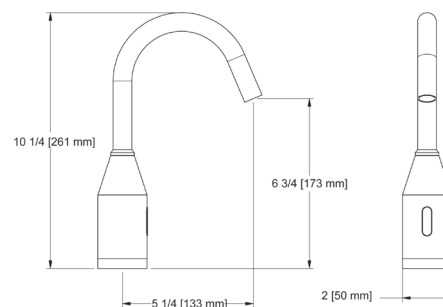

### Laminar flow wall mount faucet HHF180-6L-W

Hands free faucet for wall mounting with IR sensor. Open spout, free of flow control or aerators. Chrome finish.

6.0 Lpm/ 1.5 gpm laminar flow rate.


Supplied 6VDC plug in transformer included.

Easy topmount installation.

Automatic anti-vandal timeout. Certified to ASME A112.18.1 / CSA B125.

Overall dimensions  $2 \times 7\frac{1}{4} \times 11$ "

**\$ 779**

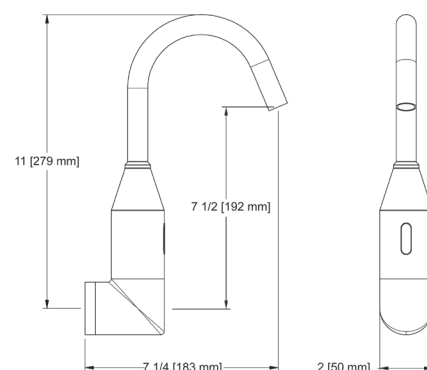

### Mixing valve MIX-LF

Thermostatic mixing valve for use with Franke faucets.

**\$ 234**

## Washroom accessories




### Back rest CM-16104

Back rest for wall mount toilet.  
Stainless steel bar with #4 satin finish with flanges and covers, with antique white solid core plastic laminate panel back.  
Concealed snap flanges and mounting hardware included. Provide adequate backing in wall for support and comply to local codes for barrier free requirement.

Dimensions **8 5/8 x 12 x 4"**

**\$ 716**

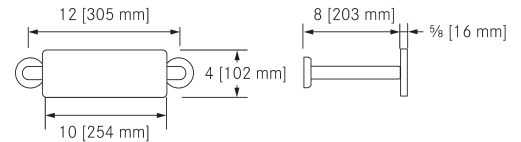


### Back rest, for standard installations CM-16104-WM

Back rest for wall mount toilet for industry standard spud location.  
Stainless steel bar has #4 satin finish with flanges and covers, with antique white solid core plastic laminate panel back.  
Concealed snap flanges and mounting hardware included. Provide adequate backing in wall for support and comply to local codes for barrier free requirement.

Dimensions **6 x 12 x 4"**

**\$ 716**

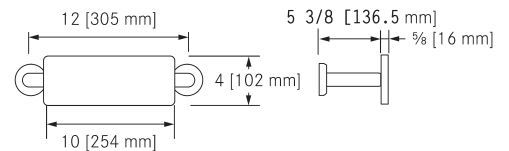


### Soap dispenser SD80V-EXT

Manual soap dispenser with extension for "Murro" basin (or equivalent).  
For use with liquid soap.  
Chromium plated brass.  
Includes a 1 litre polyethylene container for use with liquid soap. Replacement part available for container.

Dimensions **5 1/2 x 18 5/8 x 1 3/4"**

**\$ 353**

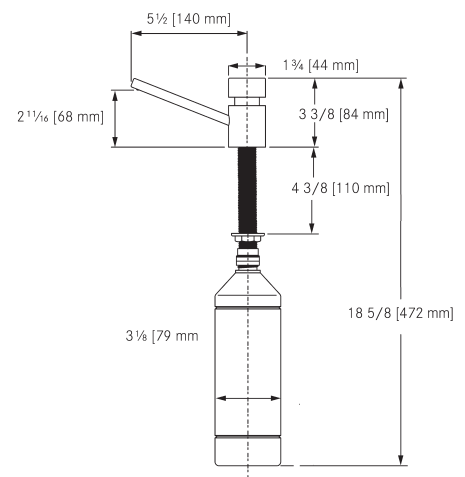



## Aqua-foam soap dispensers





### Foam soap dispenser, wall mount

Polished finish with light ring

#### SD01-001CFL

Stainless steel touch-free soap dispenser. AC powered (plug in) LED status light to notify of sensor blockage, soap level or if the wrong type of soap is used. Soap dispenser will dispense once every 48 hours if there is no action in between to avoid a clog in the tip. 1.5 liter (50 fl oz.) easy refill soap tank included. Overall dimensions **1 x 4 5/16"**

**\$ 629**

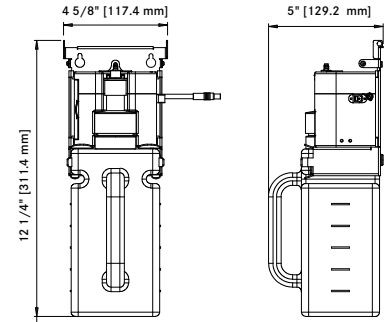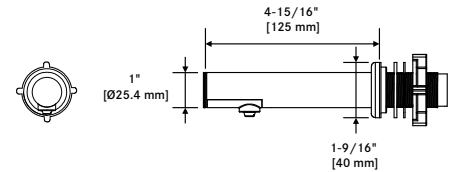

### Foam soap dispenser, wall mount

Satin finish with light ring

#### SD01-001SFL

**\$ 617**





### Foam soap dispenser, deck mount

Polished finish with light ring

#### SD01-003CFL

Stainless steel touch-free soap dispenser. AC powered (plug in) LED status light to notify of sensor blockage, soap level or if the wrong type of soap is used. Soap dispenser will dispense once every 48 hours if there is no action in between to avoid a clog in the tip. 1.5 liter (50 fl oz.) easy refill soap tank included. Overall dimensions **1 x 6 5/8"**

**\$ 642**

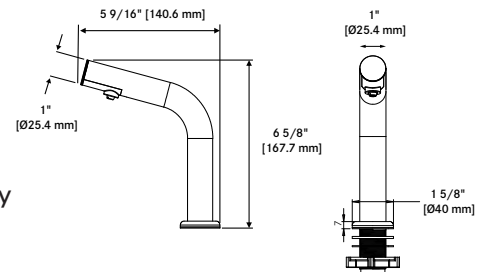

### Foam soap dispenser, deck mount

Satin finish with light ring

#### SD01-003SFL

**\$ 656**





### Foam soap dispenser, deck mount

#### SD01-002CF

Stainless steel touch-free soap dispenser. Requires either AC power or DC battery power to operate the soap dispenser. Soap dispenser will dispense once every 48 hours if there is no action in between to avoid a clog in the tip. 1.5 liter (50 fl oz.) easy refill soap tank included. Overall dimensions **1 1/2 x 5 3/8"**

**\$ 555**

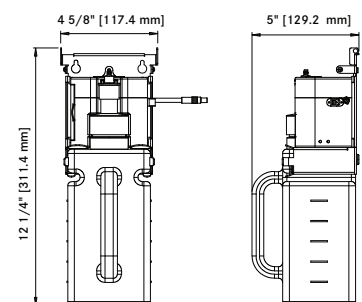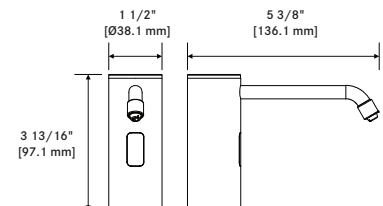

### Foam soap dispenser, deck mount

Satin finish

#### SD01-002SF

**\$ 459**

## Aqua-foam soap dispensers - multifeed



Model SD01-001 shown




Model SD01-003 shown



Model SD01-002 shown

Stainless steel touch-free soap dispenser unit as part of multifeed tank system. Ideal for high-traffic environments including airports, bus terminals, and other public spaces. Multi-feed model, up to six (6) units may be fed from a single multifeed tank. SD01-MFT sold separately, see below. Multifeed soap dispenser is sold with wall mount motor unit. Requires either AC power or DC battery power to operate the soap dispenser. Soap dispenser will dispense once every 48 hours if there is no action in between to avoid a clog in the tip.

Soap pump mechanism included with every multifeed soap dispenser unit. SD01-MFT tank sold separately.


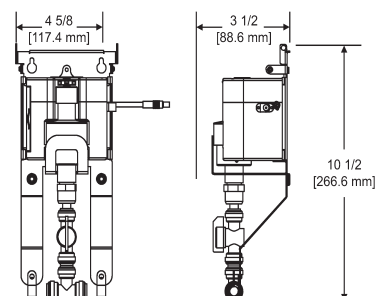


MODEL	DESCRIPTION	Overall Dimensions			FINISH	MOUNTING TYPE	PRICE
		FRONT-BACK	LEFT-RIGHT	HEIGHT			
SD01-001CFL-MF	Wall mount multifeed dispenser with light ring, polished	4 15/16" (125 mm)	1" (25 mm)	1" (25 mm)	High polish	WALL	\$ 565
SD01-001SFL-MF	Wall mount multifeed dispenser with light ring, satin finish	4 15/16" (125 mm)	1" (25 mm)	1" (25 mm)	Satin	WALL	\$ 552
SD01-003CFL-MF	Deck mount, curved multifeed dispenser with light ring, polished	5 9/16" (141 mm)	1" (25 mm)	6 5/8" (168 mm)	High polish	DECK	\$ 577
SD01-003SFL-MF	Deck mount, curved multifeed dispenser with light ring, satin finish	5 9/16" (141 mm)	1" (25 mm)	6 5/8" (168 mm)	Satin	DECK	\$ 592
SD01-002CF-MF	Deck mount multifeed dispenser, polished	5 3/8" (136 mm)	1 1/2" (38 mm)	3 13/16" (97 mm)	High polish	DECK	\$ 486
SD01-002SF-MF	Deck mount multifeed dispenser, satin finish	5 3/8" (136 mm)	1 1/2" (38 mm)	3 13/16" (97 mm)	Satin	DECK	\$ 472

### Aqua-foam multifeed soap dispenser tank, 6L SD01-MFT

Wall mounted commercial, multi-fed foam soap dispenser model can supply up to 6 dispensers. 6 litre capacity (1.6 gallons) for foam soap. Only for use with the multifeed models Franke Aqua-foam soap dispensers, in table above with suffix -MF. 6VDC plug in transformer supplied per tank. Fills through opening in countertop. Flange with LED light ring and wall mounting brackets included. LED light ring on fill cap alerts low soap conditions at a glance. During filling, an audible melody will play to alert filling is complete. Overall dimensions **7 3/8 x 7 1/4 x 13 7/8"**

**\$ 419**

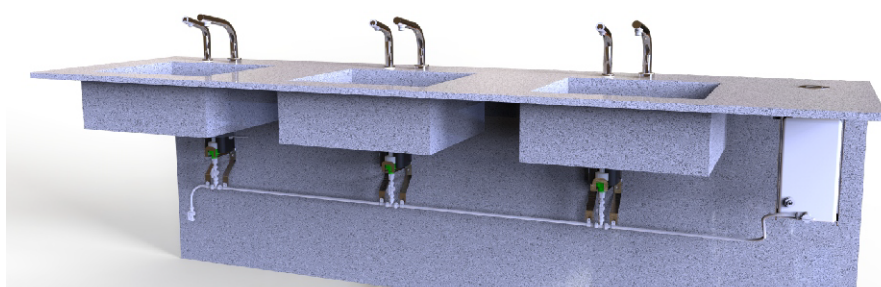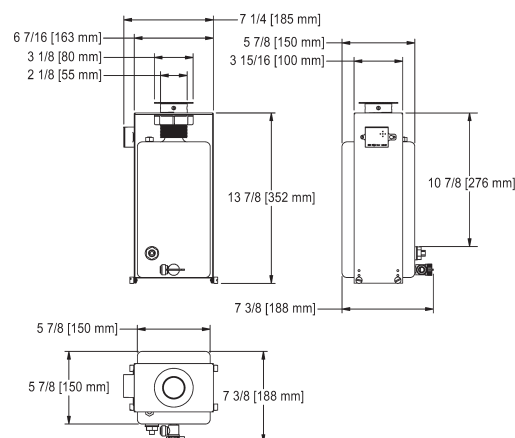

# Drain Parts & Fittings



Pictured: 1140G grid accessory installed on 1140 strainer assembly

## 3 1/2" (89 mm) waste fittings



### **Stainless steel basket strainer 1140**

3 1/2" (89 mm) all metal basket strainer assembly. Type 304 stainless steel construction complete with 1 1/2" x 3" (38 x 76 mm) stainless steel tailpiece. Pull up crumb cup. Certified to ASME A112.18.2-2005/CSA B125.2-2005.

**\$ 36**



### **Stainless steel grid strainer accessory, type 316, vandal-resistant 1140G**

Grid accessory for 3 1/2" (89 mm) basket strainer. Replaces crumb cup on 1140, 1140F-316 or the 1120-316 waste assembly to create a vandal-resistant grid waste assembly. Type 316 stainless steel construction. Certified to ASME A112.18.2-2005/CSA B125.2-2005.

**\$ 40**



### **Stainless steel basket strainer, type 316 1140F-316**

3 1/2" (89 mm) basket strainer in type 316 stainless steel construction, with 1 1/2" x 3" (38 x 76 mm) Type 316 stainless steel tailpiece. Pull up crumb cup. Certified to ASME A112.18.2-2005/CSA B125.2-2005.

**\$ 120**

## 1 1/2" (38 mm) waste fittings



### **Duplex waste with rubber stopper 100**

1 1/2" (38 mm) DN38 duplex stainless steel waste complete with 1 1/2 x 3" (38 x 76 mm) stainless steel tailpiece. Rubber stopper with pull up ring.

**\$ 19**



### **Duplex waste in type 316 stainless steel with rubber stopper 200-316**

1 1/2" (38 mm) DN38 duplex type 316 stainless steel waste complete with 1 1/2 x 3" (38 x 76 mm) type 316 stainless steel tailpiece. Rubber stopper with pull up ring.

**\$ 53**



### **Stainless steel grid strainer 100-NR**

1 1/2" (38 mm) vandal-resistant grid waste fitting, type 302 stainless steel, complete with with 1 1/2 x 3" (38 x 76 mm) stainless steel tailpiece.

**\$ 137**



### **Integral waste assembly, type 316 1047**

1 1/2" (38 mm) integral waste assembly. Complete with type 316 stainless steel shank, shank gasket, brass shank nut, brass tailpiece nut, and nylon tailpiece gasket.

**\$ 27**



### **Integral waste cover for 1 1/2" (38mm) drain 100-1-302**

1 1/2" (38 mm) perforated stainless steel grid waste cover for 1 1/2" drain.

**\$ 26**



### **Stainless steel standpipe, 10" long 310-1**

Standpipe for 1 1/2" (38 mm) waste in type 304 stainless steel. 10" (254 mm) long.

**\$ 47**



## 1 1/4" 32 mm waste fittings



**Grid strainer with overflow**  
**3700**

1 1/4" (32 mm) grid strainer with overflow and removable tailpiece. Certified to ASME A112.18.2-2005/CSA B125.2-2005.

**\$ 63**



**Grid strainer no overflow**  
**3719**

1 1/4" (32 mm) grid strainer with removable tailpiece. Certified to ASME A112.18.2-2005/CSA B125.2-2005.

**\$ 63**

## Drain Parts & Fittings



**Type 316 stainless steel tailpiece**  
**315-9-316**

1 1/2 x 3" (38 x 76 mm) type 316 stainless steel tailpiece.

**\$ 25**






**Specialty waste fitting, drain cover**  
**WHB5222-PW**

Replacement stainless steel pyramid-shaped waste cover for WHB5222-7 basin.



**\$ 93**

# Standard hole drillings for topmount stainless steel sinks



## Single bowl



## Double bowl






## Triple bowl





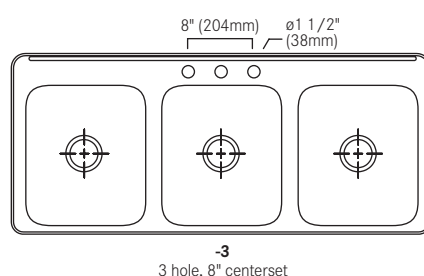
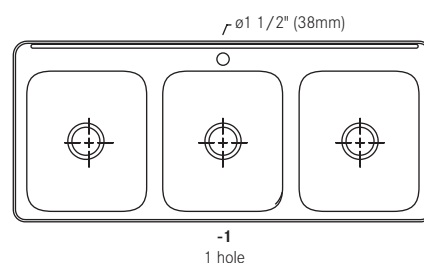


# Hole punch configurations for classroom sinks

## ALRS Series



## ALHS/LHS Series

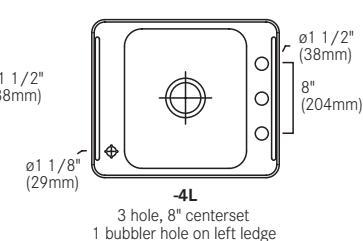

# Custom solutions



## Full custom fabrication capabilities: No minimum order

Franke Commercial will custom fabricate products to meet our customers' exact specifications. Modifications can be made to most of our standard catalogue products.

All our custom fabricated products are polished to a #4 satin finish and can be made to meet the material specification you require (T304 or T316, 14 to 18 gauge). Continuous weld construction is available for pharmaceutical applications if required.

Contact us for a quote:

- Countertops
- Topmount & Undermount Sinks
- Drainboard Sinks
- Scullery Sinks
- Wall Mount Hand Wash Stations
- Surgical Scrub Stations
- Mop Sinks
- Wall Mounted Utility Sinks





Some customers require a sink, basin, or countertop that is different from our catalog offering. This is why Franke Commercial is proud to offer custom stainless steel solutions for our customers. If you can sketch it, we can build it using our decades of experience and the quality you expect from Franke.



### **It starts with a sheet of stainless steel**

We will cut, form, weld and finish it to your exact specifications. Give us the material specifications, written spec or drawing, and Franke will deliver a certified high-quality product.

### **Sinks with integrated countertops**

Tops are available in any size and length.  
Sink bowl welded into countertop.



### **Custom-sized sinks**

We have worked with architects, designers, and engineers for decades to bring their unique designs to life.

### **Scullery & utility**

Tailor made bowl size, height, backsplash style, drainboards, and sink edge types.

### **Healthcare & pharmaceutical**

Continuous weld construction available upon specification. Custom made products that meet or exceed national healthcare standards.

### **Get a quote within 48hrs**

Delivered from our facility in 8 to 10 weeks' time.

Have questions or need it faster?

Email us at: [commercial-info.us@franke.com](mailto:commercial-info.us@franke.com)



## Stainless steel corrosion resistance information

Substance, Conditions, Strength and Temperature	T316	T304	T302
Acetic Anhydride (90%, aerated, 180 degrees F)	B	C	C
Aluminum Fluoride (5%, 70 degrees F)	B	C	C
Aluminum Sulfate (10%, boiling)	A	B	B
Ammonium Bromide (5%, 70 degrees F)	B	C	C
Ammonium Sulfate (10%, boiling)	A	B	B
Bleaching Powder (dry)	A	C	C
Butyric Acid (saturated, boiling)	A	B	B
Calcium Bisulfite (aqueous solution, 300 lbs. pressure, 390 degrees F)	B	C	C
Calcium Hydroxide (50%, boiling)	B	C	C
Calcium Hypochlorite (saturated, 70 degrees F)	A	C	C
Chloracetic Acid (70 degrees F)	B	C	C
Chlorine Gas (moist, 70 degrees F)	B	C	C
Chromic Acid (50%, boiling)	B	C	C
Ferric Chloride 1%, 70 degrees F)	B	C	C
Fluosilicic Acid 90%, 70 degrees F)	B	C	C
Formic Acid (10%, 180 degrees F)	A	C	C
Hydrochloric Acid (1% or less, 70 degrees F)	B	C	C
Iodine (dry, 70 degrees F)	A	C	C
Lactic Acid (10%, 150 degrees F)	B	C	C
Mercuric Chloride (2%, 70 degrees F)	B	C	C
Oxalic Acid (2.5%, 180 degrees F)	A	C	C
Phosphoric Acid (80%, 230 degrees F)	B	C	C
Salt Brine (70 degrees F)	A	C	C
Sauerkraut Brine (70 degrees F)	A	C	C
Sodium Hydroxide (melting, 600 degrees F)	B	C	C
Stannic Chloride (5%, 70 degrees F)	B	C	C
Sulfuric Acid (5%, 100 degrees F)	A	C	C
Zinc Chloride (saturated, 70 degrees F)	B	C	C

### CHEMICAL DATA

**A** = fully resistant, **B** = fairly resistant, **C** = not resistant.  
The chemical data above should be used as a guide to determine the type of stainless steel that will be appropriate for the application.

The rating system denotes the level of resistance to corrosion for the different types of stainless steel. For applications involving chemicals or conditions not listed, please consult Franke Commercial customer service.

Corrosion, or rusting, often reported soon after installation, has two main causes:

1. Contact Corrosion occurs when a piece of common carbon steel, copper, brass or other foreign material contacts the sink and destroys the passive protective film.
2. Pitting or Pinhole Corrosion occurs when chlorides attack the steel forming pits where galvanic cells are created. Acid chlorides are particularly severe, but even chlorine bleach can cause failure. The sink should be rinsed thoroughly after such contact. Type 316 steel should be specified if the sink will be subject to such conditions.

In the presence of oxygen, stainless steel forms a protective chromium oxide layer. This is due to the addition of chromium in excess of 11.5% during the alloying stage. The further addition of nickel, in excess of 7%, gives superior corrosion resistance to the 300 series.

Maximum corrosion resistance is obtained with the addition of molybdenum to form TYPE 316, designed to resist attack under highly corrosive conditions.



As implied, stainless steel requires oxygen in order to be stainless. There are ways to make oxygen more plentiful. For example, an acid solution which might otherwise corrode the steel, can be aerated to maintain the protective film.

# Care & Maintenance for Stainless Steel Sinks

## WHAT TO DO

Brushes with natural or plastic bristles, cotton or synthetic or micro fibre clothes, leather, sponges, pressure washer, vapour stream cleaner, toothpaste, household and window-cleaning products and natural cleaning substances like diluted vinegar (20 % vinegar / 80 % water) are ideal for cleaning stainless steel.

The best form of maintenance is frequent, regular cleanings. The best method of preventative maintenance is to ensure that the fixture is clean, dry and exposed to room atmosphere when not in use. Rinse and towel dry the fixtures daily in order to minimize major cleanups. This is of particular importance if potentially corrosive chemicals have been used.

Keep the fixture free of any standing water, which may build up mineral deposits. The quality of your water can affect the appearance and this water quality will vary from building to building.

To clean your stainless product, use the mildest cleaning procedure that will do the job effectively. On mirror finish (shiny) products we recommend using either a liquid detergent or Peek™ with a soft cloth. **DO NOT USE ABRASIVE MATERIALS ON THE MIRROR FINISH.**

On satin (matte) finishes and/or inside sink bowls we recommend using a very mild abrasive cleanser such as Old Dutch® or Cameo®.

Any cleaning or scrubbing to remove stubborn stains should follow the direction of the grain line. Any scrubbing across the grain will show as a scratch. Scrubbing in the same direction as the polish lines will blend in any surface scratch. We recommend that Scotch-Brite® pads be used only on satin finishes.

Stains and water spots anywhere on the product can be removed with a small amount of Peek™ on a damp cloth. Rub Peek™ over the surface. Always rinse after using a cleaning agent, and wipe dry to discourage any water spotting.

## WHAT NOT TO DO

We recommend that you do not use chlorine bleach to clean stainless steel, as chlorine will attack the protective layer that makes stainless steel truly stainless. The risk of damage is proportional to the concentration of the chlorine and the duration of exposure between the fixture and chlorine agent. Always dilute any antibacterial product used and wipe up any spills. Note: some antibacterial soaps contain a chlorine compound.

The unique properties of stainless steel are dependent upon exposure of the surface to the atmosphere. Do not leave any utensils in a sink overnight, as they will trap water underneath or leave a residue of small iron particles which could lead to staining and discoloration of the surface. They may not even be readily visible, but they most certainly will lead to corrosion. Any signs of rust can be removed with non metallic Scotch-Brite® scouring pads, but do not scrub across the grain. For similar reasons do not leave any mild steel, or cast iron cookware or implements, anywhere on a stainless steel surface for extended periods of time.

Steel wool, metallic scouring pads, abrasive, grinding and polishing powder as well as sand paper should never be used on a stainless steel surface as they can damage or scratch it.

## Warranty

Every Franke Commercial product is guaranteed to be suitable for any normal purpose for which it is intended and without defects in material or workmanship for the following periods of time, provided it has been installed and maintained according to Franke Commercial instructions.

- ☐ Stainless steel topmount sinks, undermount, wall mount basins: 5 year warranty
- ☐ Stainless steel scullery sinks, mop and sewage sampling sinks: 1 year warranty
- ☐ Aquarius and Ozo-flo touch-free faucets: 5 year warranty on faucet body, cables & plug-in power supply (if equipped). 1 year on solenoid valve.
- ☐ HHF-series touch-free faucets: 1 year warranty on faucet body, cables & plug-in power supply (if equipped)
- ☐ Custom and fabricated products: 1 year warranty
- ☐ Drain fittings and waste parts: 1 year warranty
- ☐ Electronic water controls: 1 year warranty
- ☐ Solid surface wall hung sinks: Medi-flo, Nightingale, Wall Hung Basin. 2 year warranty on sinks, 1 year warranty on electronics of Medi-flo
- ☐ Aqua-foam soap dispensers: 1 year warranty

100	77	\$19	AT02-005AC	71	\$1,177
1047	77	\$27	AT02-005DC	71	\$1,226
1140	76	\$36	AWHB1414P-3	59	\$6,131
3700	78	\$63	AWHB2220W-3-1	63	\$1,349
3719	78	\$63	AWHBS2419-7	62	\$1,604
100-1-302	77	\$26	CL-DB	31	\$1,024
100-NR	77	\$137	CM-16104	73	\$716
1140F-316	76	\$120	CM-16104-WM	73	\$716
1140G	76	\$40	D6410-316PCB-1	19	\$1,810
200-316	77	\$53	DL2448-1	30	\$2,216
310-1	77	\$47	DL2448-5	30	\$2,346
315-9-316	78	\$25	FSS151509-316-1	23	\$4,115
AHWSS1720W-00	52	\$1,614	FSS151509-316-1	41	\$4,115
AHWSS1720W-G	53	\$1,774	FSS2210-316-1	24	\$8,214
AHWSS1720W-T	54	\$1,818	FSS2210-316-1	41	\$8,214
ALBD4405P-1	10	\$1,336	FSS222210-316-1	23	\$5,601
ALBD4406P-1	10	\$1,336	FSS222210-316-1	41	\$5,601
ALBD6405-1	9	\$521	FSSL223410-316-1	23	\$7,157
ALBD6405P-1	10	\$1,356	FSSL223410-316-1	41	\$7,157
ALBD6406P-1	10	\$1,356	FSSO2210-316-1	24	\$8,214
ALBD7506P-1	10	\$1,336	FSSO2210-316-1	41	\$8,214
ALBDC182605P-1	10	\$1,036	FSSOL223410-316-1	24	\$8,426
ALBLS4606P-1	15	\$803	FSSOL223410-316-1	41	\$8,426
ALBLS7006P-1	15	\$937	FSSOR223410-316-1	24	\$8,426
ALBRS4606P-1	15	\$803	FSSOR223410-316-1	41	\$8,426
ALBRS7006P-1	15	\$937	FSSR223410-316-1	23	\$7,157
ALBS1306P-1	6	\$737	FSSR223410-316-1	41	\$7,157
ALBS2706P-1	6	\$805	HHF180-6L	72	\$707
ALBS4006P-1	6	\$875	HHF180-6L-W	72	\$779
ALBS4406P-1	6	\$751	HHF23T	72	\$702
ALBS4605P-1	6	\$896	HWF05	50	\$3,134
ALBS4606P-1	6	\$896	HWF23	50	\$3,168
ALBS6106P-1	6	\$986	HWF43	50	\$3,339
ALBS6406P-1	6	\$791	HWS0610P-3	60	\$727
ALBS6805-1	5	\$501	HWS1414P-00	58	\$2,170
ALBS6805-316P-1	18	\$618	HWS1420P-00	59	\$3,430
ALBS6805P-1	6	\$879	HWS6810P-3	60	\$973
ALBS6806P-1	6	\$879	HWS-RS-00	58	\$338
ALBS7006P-1	7	\$956	HWSS1518P-00	58	\$2,044
ALBS7306P-1	7	\$913	HWSS2321W-00	49	\$3,831
ALBS7506P-1	7	\$803	IWC2104	51	\$335
ALBS7806P-1	7	\$1,219	IWC2203	59	\$335
ALHS4606P-1	16	\$745	LBD0814P-1	10	\$4,035
ALHS6406P-1	16	\$803	LBD1308P-1	10	\$1,248
ALHS7306P-1	16	\$875	LBD4408P-1	10	\$1,271
ALRS4606P-1	14	\$721	LBD4410P-1	10	\$1,611
ART36-1	14	\$2,269	LBD6407-1	9	\$844
ART36-316-1	21	\$2,955	LBD6408-1	9	\$844
ART36-316-3C	21	\$2,955	LBD6408-316P-1	19	\$1,623
ART48-1	14	\$2,530	LBD6408P-1	10	\$1,291
ART48-316-1	21	\$3,245	LBD6410-316PCB-1	19	\$1,930
ART48-316-3C	21	\$3,245	LBD6410PCB-1	10	\$1,611
ART60-1	14	\$2,699	LBD6808-1	9	\$992
ART60-316-1	21	\$3,532	LBD7310P-1	10	\$2,109
ART60-316-3C	21	\$3,532	LBD7508-1	9	\$541
AS6105P-1	4	\$913	LBD7508P-1	10	\$1,297

LBD7510P-1	10	\$1,472	MIX-LF	72	\$234
LBDDBL6408P-1	13	\$3,194	OC6-316	22	\$453
LBDDBR6408P-1	13	\$3,194	OV1317U-5	47	\$810
LBS1306-1	5	\$337	OV1418-6	43	\$644
LBS1308P-1	6	\$705	OV1420U-5	47	\$1,013
LBS2708-1	5	\$531	OV1619-5-1	44	\$649
LBS2708P-1	6	\$776	OV1619-5-3	44	\$649
LBS4008P-1	6	\$833	OV1619-6-1	44	\$657
LBS4010P-1	6	\$971	OV1619-6-3	44	\$657
LBS4408P-1	6	\$764	OV17-5	43	\$589
LBS4410P-1	6	\$980	OV17-6	43	\$621
LBS4607-1	5	\$451	OV1821-5-1	45	\$694
LBS4607-316P-1	18	\$868	OV1821-5-3	45	\$694
LBS4608P-1	6	\$873	OV1821-6-1	45	\$769
LBS4610-316P-1	18	\$1,055	OV1821-6-3	45	\$769
LBS4610P-1	6	\$1,065	OWB1119U-5	46	\$1,156
LBS6108P-1	6	\$868	OWB1420U-5	46	\$1,120
LBS6110P-1	6	\$1,190	RC6-316	22	\$596
LBS6407-316P-1	18	\$948	RDL2436-1	36	\$6,910
LBS6408P-1	6	\$754	RDL2436L-1	36	\$7,976
LBS6410PCB-1	6	\$927	RDL2436LR-1	36	\$9,044
LBS6807-1	5	\$498	RDL2436R-1	36	\$7,976
LBS6807-2	5	\$570	RDL2448-1	36	\$7,445
LBS6807-316P-1	18	\$965	RDL2448L-1	36	\$8,509
LBS6808-1	5	\$547	RDL2448LR-1	36	\$9,577
LBS6808-2	5	\$606	RDL2448R-1	36	\$8,509
LBS6808-316P-1	18	\$1,064	RSL2418-1	35	\$4,535
LBS6808P-1	6	\$836	RSL2418L-1	35	\$5,604
LBS6810-1	5	\$717	RSL2418LR-1	35	\$6,671
LBS6810-316P-1	18	\$1,124	RSL2418R-1	35	\$5,604
LBS6810P-1	6	\$1,018	RSL2424-1	35	\$4,776
LBS7008P-1	7	\$900	RSL2424L-1	35	\$5,842
LBS7308-1	5	\$591	RSL2424LR-1	35	\$6,910
LBS7308P-1	7	\$868	RSL2424R-1	35	\$5,842
LBS7310P-1	7	\$1,102	RTL2454-1	37	\$10,645
LBS7312P-1	7	\$1,216	RTL2454L-1	37	\$11,714
LBS7314P-1	7	\$2,346	RTL2454LR-1	37	\$12,780
LBS7508-1	5	\$508	RTL2454R-1	37	\$11,714
LBS7508P-1	7	\$763	RTL2472-1	37	\$11,178
LBS7808P-1	7	\$1,024	RTL2472L-1	37	\$12,246
LBS8014P-1	7	\$2,276	RTL2472LR-1	37	\$13,313
LBS9106-1	5	\$392	RTL2472R-1	37	\$12,246
LBS9407-316P-1	18	\$700	S6407-316P-1	18	\$930
LBSDBL6408P-1	13	\$2,496	S6408-1	4	\$445
LBSDBL6810-316P-1	20	\$3,458	S6410PCB-1	4	\$962
LBSDBL6810P-1	13	\$2,570	S6808-1	4	\$506
LBSDBR6408P-1	13	\$2,496	S6808-316P-1	18	\$932
LBSDBR6810-316P-1	20	\$3,458	S6810-1	4	\$620
LBSDBR6810P-1	13	\$2,570	S6810-316P-1	18	\$1,181
LBT6407CB-1	11	\$974	S7308-1	4	\$577
LBT6410PCB-1	11	\$2,314	S7314P-1	4	\$2,220
LBT8610P-1	11	\$2,997	S8014P-1	4	\$2,212
LHS4608P-1	16	\$762	S9106-1	4	\$292
MEDI-MIX	51	\$234	S9407-316P-1	18	\$599
MEDI-SHR	51	\$315	SD01-001CFL	74	\$629
MIX-LF	71	\$234	SD01-001CFL-MF	75	\$565



SD01-001SFL	74	\$617	STL2472R-1	34	\$11,853
SD01-001SFL-MF	75	\$552	TL2454-1	31	\$3,259
SD01-002CF	74	\$555	TL2454-5	31	\$3,388
SD01-002CF-MF	75	\$486	TL2472-1	31	\$4,040
SD01-002SF	74	\$459	TL2472-5	31	\$4,171
SD01-002SF-MF	75	\$472	UCD6405P-1	12	\$731
SD01-003CFL	74	\$642	UCD6408P-1	12	\$765
SD01-003CFL-MF	75	\$577	UCS4608-316P-1	20	\$868
SD01-003SFL	74	\$656	UCS4610-316P-1	20	\$1,085
SD01-003SFL-MF	75	\$592	UCS6105P-1	12	\$626
SD01-MFT	75	\$419	UCS6805P-1	12	\$566
SD80V-EXT	73	\$353	UCS6808P-1	12	\$599
SDL2436-1	33	\$6,688	V1114-5	43	\$379
SDL2436L-1	33	\$7,719	V1114-5D	43	\$443
SDL2436LR-1	33	\$8,754	V1418-6	43	\$488
SDL2436R-1	33	\$7,719	V1619-5-1	44	\$644
SDL2448-1	33	\$7,202	V1619-5-3	44	\$644
SDL2448L-1	33	\$8,237	V1619-6-1	44	\$653
SDL2448LR-1	33	\$9,270	V1619-6-3	44	\$653
SDL2448R-1	33	\$8,237	V17-5	43	\$513
SL2424-1	30	\$1,433	V17-6	43	\$578
SL2424-316-1	21	\$5,321	V1821-5-1	45	\$671
SL2424-316-5	21	\$5,608	V1821-5-3	45	\$671
SL2424-5	30	\$1,564	V1821-6-1	45	\$713
SL2448-1	30	\$2,216	V1821-6-3	45	\$713
SL2448-316-1	21	\$8,053	WB1119U-5	46	\$1,222
SL2448-316-5	21	\$8,771	WB1420U-5	46	\$1,123
SL2448-5	30	\$2,346	WDL2436-1	39	\$8,120
SSL2418-1	32	\$4,104	WDL2436L-1	39	\$9,284
SSL2418L-1	32	\$5,139	WDL2436LR-1	39	\$10,449
SSL2418LR-1	32	\$6,171	WDL2436R-1	39	\$9,284
SSL2418R-1	32	\$5,139	WDL2448-1	39	\$8,703
SSL2424-1	32	\$4,622	WDL2448L-1	39	\$9,865
SSL2424L-1	32	\$5,654	WDL2448LR-1	39	\$11,031
SSL2424LR-1	32	\$6,171	WDL2448R-1	39	\$9,865
SSL2424R-1	32	\$5,654	WHB1616-3	66	\$900
SSS1827	28	\$12,582	WHB1617-3	67	\$899
SSS1827DDS	29	\$16,711	WHB1617-316-3	22	\$1,352
SSS1827SDSL	28	\$13,521	WHB1617-6	67	\$910
SSS1827SDSR	29	\$13,521	WHB1617-7	67	\$828
SSU1-00	56	\$6,083	WHB1716-3	69	\$891
SSU1-10	57	\$7,063	WHB1716SPL-3	69	\$931
SSU1-2016-3	55	\$8,950	WHB1819-3	68	\$888
SSU1-2020-3	55	\$9,206	WHB1819-316-3	22	\$1,501
SSU2-00	56	\$7,076	WHB1819-6	68	\$1,007
SSU2-10	57	\$9,048	WHB1819-7	68	\$832
SSU2-2040-3	55	\$12,531	WHB2221-7	64	\$1,934
SSU3-00	56	\$14,831	WHB2221-8	64	\$2,066
SSU3-10	57	\$17,365	WHB2221-RS	64	\$282
STL2454-1	34	\$8,237	WHB2221-UC	64	\$283
STL2454L-1	34	\$9,270	WHB5222-7	62	\$3,063
STL2454LR-1	34	\$10,301	WHB5222-PW	78	\$93
STL2454R-1	34	\$9,270	WHB5222-RS	62	\$282
STL2472-1	34	\$10,818	WHBS181910-3	69	\$3,511
STL2472L-1	34	\$11,853	WSL2418-1	38	\$5,209
STL2472LR-1	34	\$12,882	WSL2418L-1	38	\$6,374

WSL2418LR-1	38	\$7,538
WSL2418R-1	38	\$6,374
WSL2424-1	38	\$5,792
WSL2424L-1	38	\$6,956
WSL2424LR-1	38	\$8,120
WSL2424R-1	38	\$6,956
WSS6713	69	\$5,664
WT310E-7	65	\$745
WT400C-7	65	\$978
WT500C-7	65	\$1,096
WT600C-7	66	\$1,185
WTL2454-1	40	\$12,776
WTL2454L-1	40	\$13,940
WTL2454LR-1	40	\$15,105
WTL2454R-1	40	\$13,940
WTL2472-1	40	\$13,359
WTL2472L-1	40	\$14,524
WTL2472LR-1	40	\$15,687
WTL2472R-1	40	\$14,524
WT-RS	66	\$666
WTS2025-1	27	\$3,293
WTS2031-1	27	\$3,458
WTS2036-1	27	\$4,256
WTS2048-1	27	\$4,414
WTS2060-1	27	\$4,683
WTS2072-1	27	\$4,915
WTS2096-1	27	\$5,323
WTS36-1	27	\$3,868
WTS48-1	27	\$4,013
WTS60-1	27	\$4,257
WTS72-1	27	\$4,469

## Terms & Conditions & Warranty

---

Our General Terms and Conditions of Sale are exclusively applicable to the sale and delivery of our products. The respective valid version is available on: <https://www.franke.com/us/en/home-solutions/general-terms-and-conditions-of-sale.html>

### **FRANKE HOME SOLUTIONS WARRANTY EFFECTIVE SEPTEMBER 1, 2022**

In the United States, Canada and Latin America, Franke warrants the products from manufacturing defects in material and workmanship when purchased from Franke or a Franke Authorized Retailer pursuant to product-specific warranties detailed herein (each, a "Warranty" and collectively, the "Warranties"). The products must be properly installed, per company's installations instructions, in its original installation, and used in normal indoor residential kitchen applications. Any products or components which have been modified or altered, from its original intended condition will void the warranty. The Franke Warranties are limited to the original purchaser and are non-transferrable. These Warranties do not include products purchased from non-Authorized Retailers, products that are obsolete or discontinued, or products that were previous display models. All issues with installed products are considered warranty claims and not subject to the Return Policy. Franke reserves the right to inspect any product reported to be defective and the original installation prior to providing a replacement product and/or component. All decisions are final. In no situation shall the liability of Franke exceed the amount of the original purchase price.

The Warranties do not cover, and Franke shall not be liable for, any damage to products or components resulting from misuse or abuse, accidental damages, normal wear such as scuffs, scratches or finish reduction/fading; improper installation, abnormal usage, negligence, damage caused by improper maintenance or cleaning. Damage caused by impurities, corrosive chemicals or acts beyond Franke's control are not covered by any Warranty.

Franke product replacements do not include transportation, shipping, diagnosis, labor, installation, removal, disposal for any products or liability for project delays. Product replacements are not guaranteed to be exact replacements. The owner of a product is liable for any transportation and re-installation costs related to any warranty for such product. If the original product is not available at the time of the warranty claim, at Franke's option, the product replacements will be of similar size, material, and value. Any products or components which have been modified or altered, from its original intended condition will void the warranty.

The Warranties do not allow recovery of incidental or consequential damages such as loss of use, delay, property damage or other consequential damage, and Franke accepts no liability for such damages. Each Warranty is limited to the conditions set forth herein and to the applicable warranty period specified herein and is exclusive. EXCEPT FOR THE WARRANTIES SET FORTH HEREIN, FRANKE MAKES NO WARRANTY WHATSOEVER WITH RESPECT TO THE PRODUCTS, INCLUDING, BUT NOT LIMITED TO, (1) ANY WARRANTY OF MERCHANTABILITY, (2) WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, (3) WARRANTY OF TITLE, OR (4) WARRANTY AGAINST INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS OF A THIRD PARTY, WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE. LEGAL DISCLAIMER PLEASE READ CAREFULLY. Franke Home Solutions North America, LLC/Franke Kindred Canada Limited provides the above information to you as a public service to our customers. By accessing and using this information, you agree to the following and to comply with all applicable laws. If you do not agree with these terms and conditions, do not use this information. While we try to keep the information current, changes may have occurred since its creation. Contact your Regional Manager or Customer Service to verify information regarding Franke Home Solutions North America, LLC/Franke Kindred Canada programs and their use by you.





Franke Home Solutions  
[commercial-info.us@franke.com](mailto:commercial-info.us@franke.com)  
[franke.com](http://franke.com)

USA  
#CMCLCATUSEN25