

FRANKE

COMMERCIAL
2026 • 2027

Pricing effective January 1, 2026

COMMERCIAL 2026 • 2027

Pricing effective January 1, 2026

PRODUCT CATEGORIES

- 02 Stainless steel sinks
- 12 Type 316 laboratory sinks
- 20 Utility & scullery
- 38 Vanity basins
- 44 Healthcare
- 57 Hand wash basins
- 66 Washroom accessories
- 72 Waste fittings
- 76 Custom solutions

- 78 Faucet hole drilling diagrams
- 79 Care & maintenance
- 80 Corrosion resistance information

- 82 Index
- 84 Terms & conditions
- 85 Warranty





Stainless Steel Sinks



Guaranteed to maintain their functionality over time, Franke Commercial stainless steel sinks remain brilliant and easy to clean. Stainless steel is the material of choice for commercial environments where durability, hygiene, and functionality matter most.

Franke Commercial stainless steel sinks have been engineered for quick and easy installation.

Our patented EZ Torque™ fasteners mean a Franke sink will **install five times faster** than the competition. One-handed drop and drill installation: fasteners come pre-installed on the sink meaning you can simply drop the sink into the countertop and use a drill to tighten the fasteners.

Factory applied rimseal simplifies installation. No need for silicone for the sink rim eliminates a messy step from the install process.



EZ Torque™ fasteners

Install a Franke Commercial topmount sink in two easy steps: drop and drill. Bright red EZ Torque™ fasteners are easy to spot and can be tightened with a drill in seconds.



Satin finish

A #4 satin finished bowl and deck allows scratches to be blended into the grain line. An ideal finish for commercial applications.



Rimseal pre-installed


Installing a Franke Commercial topmount sinks is quick and easy. A factory-applied Rimseal means fewer installation steps and less mess.



Waste fitting included

Most Franke Commercial sinks are sold with a stainless steel waste kit included in the box. These high quality waste assemblies are also available separately.

Single bowl topmount no faucet ledge, 20 gauge

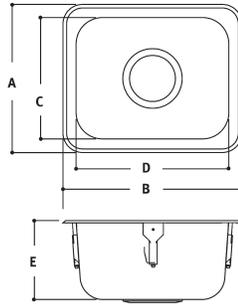

Single compartment self rimming topmount sink, 20 gauge (0.9 mm), type 301 (CNS 18/8) stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Certified to ASME A112.19.3/CSA B45.4.

Model S6808-1 shown



♿	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
	S6408-1	18 1/8" (460 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	20	\$ 491
	S6808-1	18 1/8" (460 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	20	\$ 559
	S6810-1	18 1/8" (460 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	C	20	\$ 684

Single bowl topmount no faucet ledge, 18 gauge



Single bowl without faucet ledge, 18 gauge S6410PCB-1

Single compartment self rimming topmount sink without faucet ledge, 18 gauge (1.2mm), type 304 (CNS 18/10) stainless steel.

Polished #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.


Outside dimensions **18 1/8" x 16 1/8"**

Inside bowl **16 x 14 x 10"**


Waste location **Center back**

Minimum cabinet size **24"**

\$1,062

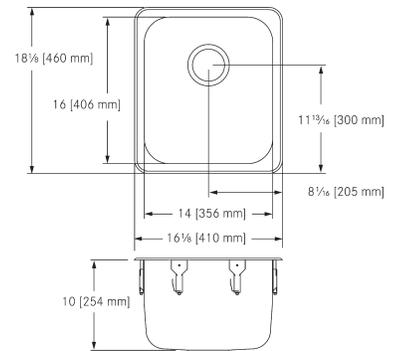

Single bowl topmount with faucet ledge, 20 gauge

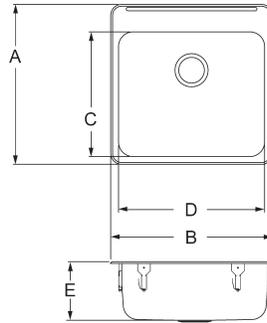

Single compartment self rimming topmount sink with faucet ledge, 20 gauge (0.9 mm), type 301 (CNS 18/8) stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece.

Certified to ASME A112.19.3/CSA B45.4.

Faucet hole options (add to part number when ordering):

- 1 1 hole, centered
- 2 2 hole, 4" spread
- 3 3 hole, 8" spread

Model LBS6808-1 shown




MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
LBS9106-1	13 3/4" (349 mm)	13 5/8" (346 mm)	9 1/4" (235 mm)	11 5/8" (295 mm)	6" (152 mm)	C	1,2	\$ 433
LBS1306-1	15 7/16" (392 mm)	15 1/8" (384 mm)	11" (279 mm)	13" (330 mm)	6" (152 mm)	C	1,2	\$ 372
LBS2708-1	17" (432 mm)	19 1/8" (486 mm)	12" (305 mm)	17" (432 mm)	8" (203 mm)	C	1,3	\$ 586
LBS4607-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	7" (178 mm)	C	1,3	\$ 498
ALBS6805-1	20 9/16" (522 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	5" (127 mm)	LR	1,3	\$ 553
LBS6807-1	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	7" (178 mm)	CB	1,3	\$ 549
LBS6807-2	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	7" (178 mm)	CB	1,3	\$ 629
LBS6808-1	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	1,3	\$ 604
LBS6808-2	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	1,3	\$ 669
LBS6810-1	20 9/16" (522 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	C	1,3	\$ 791
LBS7508-1	22" (559 mm)	17 1/4" (438 mm)	17" (432 mm)	15" (381 mm)	8" (203 mm)	CB	1,3	\$ 561
LBS7308-1	22 1/16" (560 mm)	25 5/8" (651 mm)	17" (432 mm)	23" (584 mm)	8" (203 mm)	CB	1,3	\$ 652

Models ending in -1: 3 1/2" stainless steel crumb cup strainer assembly with 1 1/2" tailpiece included

Models ending in -2 have overflow: 3 1/2" stainless steel crumb cup strainer assembly with overflow and 1 1/2" tailpiece included

Single bowl topmount with faucet ledge, 18 gauge

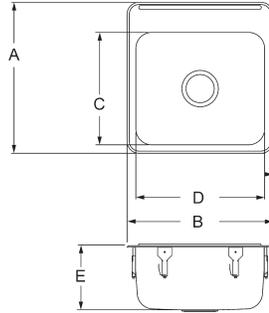

Model LBS4608P-1 shown



Single compartment self rimming topmount sink, 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Certified to ASME A112.19.3/CSA B45.4

Faucet hole options (add to part number when ordering):


- 1 1 hole, centered
- 2 2 hole, 4" spread
- 3 3 hole, 8" spread

Accessibility	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	ALBS1306P-1	15 7/16" (392 mm)	15 1/8" (384 mm)	11" (279 mm)	13" (330 mm)	6" (152 mm)	C	1,2	\$ 813
	LBS1308P-1	15 7/16" (392 mm)	15 1/8" (384 mm)	11" (279 mm)	13" (330 mm)	8" (203 mm)	C	1,2	\$ 778
•	ALBS2706P-1	17" (432 mm)	19 1/8" (486 mm)	12" (305 mm)	17" (432 mm)	6" (152 mm)	C	1,3	\$ 888
	LBS2708P-1	17" (432 mm)	19 1/8" (486 mm)	12" (305 mm)	17" (432 mm)	8" (203 mm)	C	1,3	\$ 856
•	ALBS4406P-1	18 13/16" (478 mm)	16 1/8" (410 mm)	14" (356 mm)	14" (356 mm)	6" (152 mm)	CB	1,3	\$ 828
	LBS4408P-1	18 13/16" (478 mm)	16 1/8" (410 mm)	14" (356 mm)	14" (356 mm)	8" (203 mm)	CB	1,3	\$ 843
•	ALBS4605P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	5" (127 mm)	C	1,3	\$ 988
•	ALBS4606P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	6" (152 mm)	C	1,3	\$ 988
	LBS4608P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	8" (203 mm)	C	1,3	\$ 963
	LBS4610P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	10" (254 mm)	C	1,3	\$ 1,175
•	ALBS4006P-1	18 13/16" (478 mm)	22 1/8" (562 mm)	14" (356 mm)	20" (508 mm)	6" (152 mm)	CB	1,3	\$ 965
	LBS4008P-1	18 13/16" (478 mm)	22 1/8" (562 mm)	14" (356 mm)	20" (508 mm)	8" (203 mm)	CB	1,3	\$ 919
	LBS4010P-1	18 13/16" (478 mm)	22 1/8" (562 mm)	14" (356 mm)	20" (508 mm)	10" (254 mm)	CB	1,3	\$ 1,071
•	ALBS6406P-1	20 9/16" (522 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	6" (152 mm)	CB	1,3	\$ 873
	LBS6408P-1	20 9/16" (522 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1,3	\$ 832
	LBS6410PCB-1	20 9/16" (522 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	10" (254 mm)	CB	1,3	\$ 1,023
•	ALBS6805P-1	20 9/16" (522 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	5" (127 mm)	LR	1,3	\$ 969
•	ALBS6806P-1	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	6" (152 mm)	CB	1,3	\$ 969
	LBS6808P-1	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	1,3	\$ 922
	LBS6810P-1	20 9/16" (521 mm)	20 1/8" (508 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	C	1,3	\$ 1,122
•	ALBS6106P-1	20 13/16" (529 mm)	23 1/8" (587 mm)	16" (406 mm)	21" (533 mm)	6" (152 mm)	CB	1,3	\$ 1,088
	LBS6108P-1	20 13/16" (529 mm)	23 1/8" (587 mm)	16" (406 mm)	21" (533 mm)	8" (203 mm)	CB	1,3	\$ 958
	LBS6110P-1	20 13/16" (529 mm)	23 1/8" (587 mm)	16" (406 mm)	21" (533 mm)	10" (254 mm)	CB	1,3	\$ 1,313
•	ALBS7506P-1	22" (559 mm)	17 1/4" (438 mm)	17" (432 mm)	15" (381 mm)	6" (152 mm)	CB	1,3	\$ 886
	LBS7508P-1	22" (559 mm)	17 1/4" (438 mm)	17" (432 mm)	15" (381 mm)	8" (203 mm)	CB	1,3	\$ 842
•	ALBS7306P-1	22 1/16" (560 mm)	25 5/8" (651 mm)	17" (432 mm)	23" (584 mm)	6" (152 mm)	CB	1,3	\$ 1,007
	LBS7308P-1	22 1/16" (560 mm)	25 5/8" (651 mm)	17" (432 mm)	23" (584 mm)	8" (203 mm)	CB	1,3	\$ 958
	LBS7310P-1	22 1/16" (560 mm)	25 5/8" (651 mm)	17" (432 mm)	23" (584 mm)	10" (254 mm)	CB	1,3	\$ 1,216
	LBS7312P-1	22 1/16" (560 mm)	25 5/8" (651 mm)	17 1/2" (445 mm)	23 1/2" (597 mm)	12" (305 mm)	C	1,3	\$ 1,341
	LBS7314P-1	22 9/16" (573 mm)	25 5/8" (651 mm)	17 1/2" (445 mm)	23 1/2" (597 mm)	14" (356 mm)	C	1,3	\$ 2,587
•	ALBS7806P-1	22" (559 mm)	30 1/8" (765 mm)	17" (432 mm)	28" (711 mm)	6" (152 mm)	CB	1,3	\$ 1,344
	LBS7808P-1	22" (559 mm)	30 1/8" (765 mm)	17" (432 mm)	28" (711 mm)	8" (203 mm)	CB	1,3	\$ 1,130

Double bowl topmount with faucet ledge, 20 gauge



Model LBD6408-1 shown

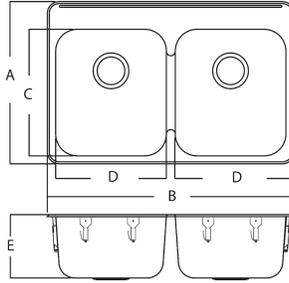

Double compartment self rimming topmount, 20 gauge (0.9 mm), type 301 (CNS 18/8) stainless steel. #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4

Faucet hole options (add to part number when ordering):

- 1 1 hole, centered over partition
- 3 3 hole, 8" spread, centered over partition




♿	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	ALBD6405-1	20 1/2" (521 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	5" (127 mm)	LR, RR	1, 3	\$ 575
	LBD6407-1	20 1/2" (521 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	7" (178 mm)	CB	1, 3	\$ 931
	LBD6408-1	20 1/2" (521 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1, 3	\$ 931
	LBD7508-1	22" (559 mm)	33 1/4" (845 mm)	17" (432 mm)	15" (381 mm)	8" (203 mm)	CB	1, 3	\$ 597

Double bowl topmount with faucet ledge, 18 gauge



Model LBD7508P-1 shown

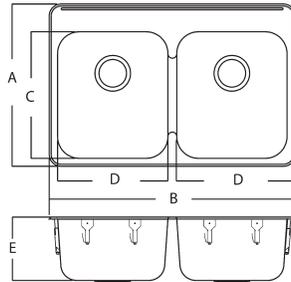

Double compartment self rimming topmount sink, 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4

Faucet hole options (add to part number when ordering):

- 1 1 hole, centered over partition
- 2 2 hole, 8" spread
- 3 3 hole, 8" spread, centered over partition



♿	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	ALBDC182605P-1	18 1/4" (464 mm)	26 5/8" (677 mm)	16" (406 mm)	14" (356 mm)	6" (153 mm)	CB	2	\$1,142
•	ALBD4405P-1	18 13/16" (478 mm)	31 1/4" (794 mm)	14" (356 mm)	14" (356 mm)	5" (127 mm)	CB	1, 3	\$1,473
•	ALBD4406P-1	18 13/16" (478 mm)	31 1/4" (794 mm)	14" (356 mm)	14" (356 mm)	6" (152 mm)	CB	1, 3	\$1,473
	LBD4408P-1	18 13/16" (478 mm)	31 1/4" (794 mm)	14" (356 mm)	14" (356 mm)	8" (203 mm)	CB	1, 3	\$1,402
•	ALBD6405P-1	20 1/2" (521 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	5" (127 mm)	RC	1, 3	\$1,495
•	ALBD6406P-1	20 1/2" (520 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	6" (152 mm)	CB	1, 3	\$1,495
	LBD6408P-1	20 1/2" (520 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1, 3	\$1,424
	LBD6410PCB-1	20 13/16" (529 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	10" (254 mm)	CB	1, 3	\$1,777
•	ALBD7506P-1	22" (559 mm)	33 1/4" (845 mm)	17" (432 mm)	15" (381 mm)	6" (152 mm)	CB	1, 3	\$1,473
	LBD7508P-1	22" (559 mm)	33 1/4" (845 mm)	17" (432 mm)	15" (381 mm)	8" (203 mm)	CB	1, 3	\$1,430
	LBD7510P-1	22" (559 mm)	33 1/4" (845 mm)	17" (432 mm)	15" (381 mm)	10" (254 mm)	CB	1, 3	\$1,623

Triple bowl topmount with faucet ledge



Triple bowl with faucet ledge, 20 gauge

LBT6407CB-1

Triple compartment self rimming topmount sink with faucet ledge, 20 gauge (0.9mm), type 301 (CNS 18/8) stainless steel.

Polished #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.


Outside dimensions **20 9/16" x 46 3/8"**

Inside bowl **16 x 14 x 7"**

Waste location **Center back**

Custom cabinet required

\$1,074

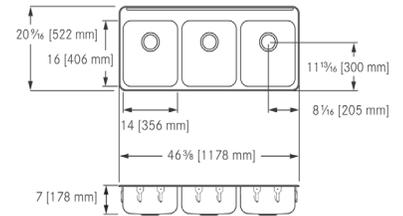

Triple bowl with faucet ledge, 18 gauge

LBT6410PCB-1

Triple compartment self rimming topmount sink with faucet ledge, 18 gauge (1.2mm), type 304 (CNS 18/10) stainless steel.

Polished #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.


Outside dimensions **20 9/16" x 46 3/8"**

Inside bowl **16 x 14 x 10"**

Waste location **Center back**

Custom cabinet required

\$2,552

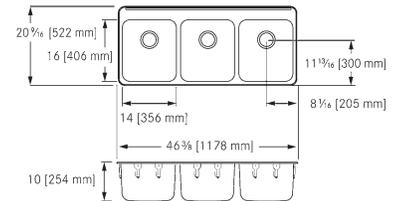

Triple bowl with faucet ledge, 18 gauge

LBT8610P-1

Triple compartment self rimming topmount sink with faucet ledge, 18 gauge (1.2mm), type 304 (CNS 18/10) stainless steel.

Polished #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.


Outside dimensions **22 9/16" x 52 3/8"**

Inside bowl **18 x 16 x 10"**


Waste location **Center back**

Custom cabinet required

\$3,304

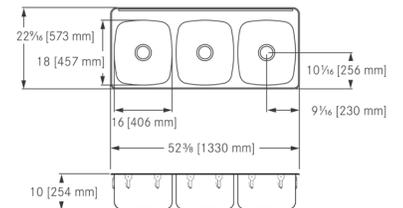

Single bowl topmount drainboard, 18 gauge

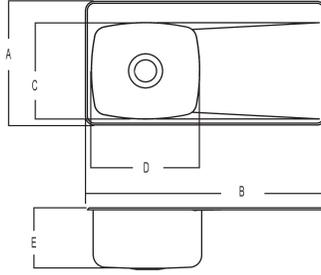

Model LBSDBR6810P-1 shown




Single compartment self rimming topmount sink with faucet ledge and drainboard. Drainboard slopes toward bowl. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Includes factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.

Faucet hole options (add to part number when ordering):
-1 1 hole, centered
-3 3 hole, 8" spread

♿	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
	LBSDBL6408P-1	20 5/8" (524 mm)	36" (914 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1,3	\$ 2,752
	LBSDBR6408P-1	20 5/8" (524 mm)	36" (914 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1,3	\$ 2,752
	LBSDBL6810P-1	20 9/16" (522 mm)	40" (1016 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	C	1,3	\$ 2,834
	LBSDBR6810P-1	20 9/16" (522 mm)	40" (1016 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	C	1,3	\$ 2,834

Double bowl topmount drainboard, 18 gauge

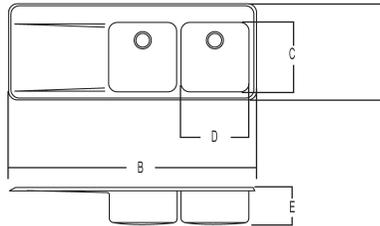


Model LBDDBR6408P-1 shown

Double compartment self rimming topmount sink with faucet ledge and drainboard. Drainboard slopes toward bowl. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finish. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Undercoated to reduce condensation and resonance. Includes waste assemblies, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.

Faucet hole options (add to part number when ordering):
-1 1 hole, centered
-3 3 hole, 8" spread

♿	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
	LBDDBL6408P-1	20 1/2" (521 mm)	51" (1295 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1,3	\$ 3,522
	LBDDBR6408P-1	20 1/2" (521 mm)	51" (1295 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1,3	\$ 3,522

Single bowl undermount, 18 gauge

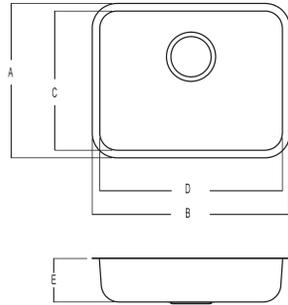

Single compartment undermount sink in 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Template and installation instructions included.


Certified to ASME A112.19.3/CSA B45.4.

Model UCS6808P-1 shown



♿	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	UCS6105P-1	17 3/4" (451 mm)	22 3/4" (346 mm)	16" (406 mm)	21" (533 mm)	5" (127 mm)	CB	18	\$ 691
•	UCS6805P-1	18 1/8" (460 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	5" (127 mm)	CB	18	\$ 625
	UCS6808P-1	18 1/8" (460 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	18	\$ 660

Double bowl undermount, 18 gauge

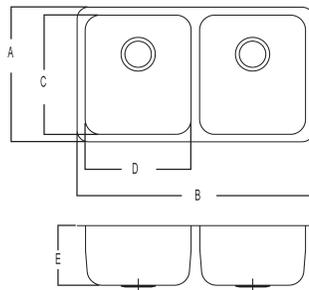

Double compartment undermount sink in 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpieces. Template and installation instructions included.

Certified to ASME A112.19.3/CSA B45.4.

Model UCD6408P-1 shown




♿	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	UCD6405P-1	17 3/4" (451 mm)	30 7/8" (784 mm)	16" (406 mm)	14" (356 mm)	5" (127 mm)	CB	18	\$ 806
	UCD6408P-1	17 3/4" (451 mm)	30 7/8" (784 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	18	\$ 844



**Looking for more undermount sinks?
Franke Commercial no ledge topmount sinks
can also be undermounted**

Art room sinks, topmount, no ledge, 18 gauge

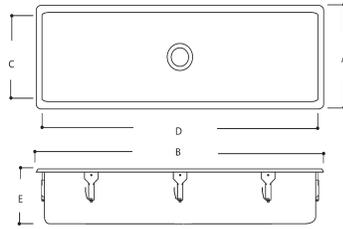

Single compartment self rimming topmount sink in 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel, #4 satin finished. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Certified to ASME A112.19.3/CSA B45.4.

Model ART48-1 shown



🦽	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
	ART36-1	19 1/8" (486 mm)	38 1/8" (969 mm)	17" (432 mm)	36" (914 mm)	8" (203 mm)	C	18	\$ 2,502
	ART48-1	19 1/8" (486 mm)	50 1/8" (1273 mm)	17" (432 mm)	48" (1219 mm)	8" (203 mm)	C	18	\$ 2,790
	ART60-1	19 1/8" (486 mm)	62 1/8" (1578 mm)	17" (432 mm)	60" (1524 mm)	8" (203 mm)	C	18	\$ 2,976

Topmount stainless steel sinks engineered for quick and easy installation

Factory installed rimseal


Eliminates the need for silicone



Contractors and installers love the ease of installation of the Franke Rimseal. Simply peel off the backing and the sink is ready to install. No silicone mess.

EZ Torque™ fasteners

Preinstalled on the sink, drop and drill installation

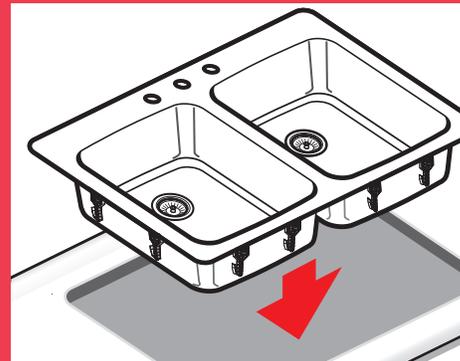

Secure the sink rim to the countertop in two easy steps. Drop the sink into the countertop then tighten with a drill. Clamps are preinstalled to sink, and won't get lost on the job site or left behind in the box.

Type 316 Stainless Sinks



Single bowl topmount no faucet ledge type 316 stainless steel



Topmount single bowl sink, no faucet ledge, T316 S6407-316P-1

Gauge 18


TYPE 316/316L Stainless Steel

Outside dimensions 18 1/8 x 16 1/8"

Inside bowl 16 x 14 x 7"

Waste fitting type 316, 3 1/2" crumb cup waste assembly with T316 tailpiece included

Waste location **Center back**

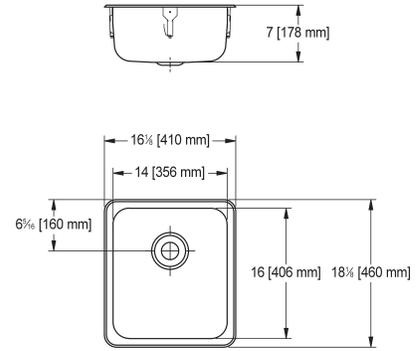

18ga



cUPC®

\$1,026



Topmount single bowl sink, no faucet ledge, T316 S6808-316P-1

Gauge 18


TYPE 316/316L Stainless Steel

Outside dimensions 18 1/8 x 20 1/8"

Inside bowl 16 x 18 x 8"

Waste fitting type 316, 3 1/2" crumb cup waste assembly with T316 tailpiece included

Waste location **Center back**

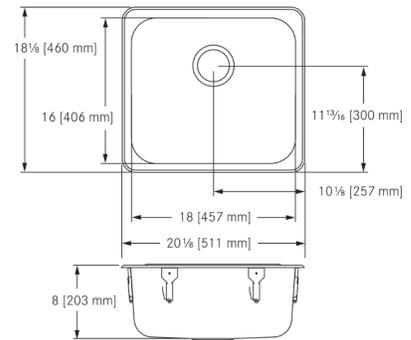

18ga



cUPC®

\$1,028



Topmount single bowl sink, no faucet ledge, T316 S6810-316P-1

Gauge 18


TYPE 316/316L Stainless Steel

Outside dimensions 18 1/8 x 20 1/8"

Inside bowl 16 x 18 x 10"

Waste fitting type 316, 3 1/2" crumb cup waste assembly with T316 tailpiece included

Waste location **Center**

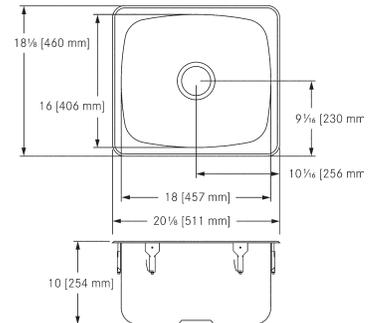


18ga



cUPC®

\$1,303

Single bowl topmount with faucet ledge type 316 stainless steel

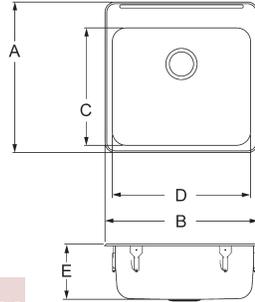

Single compartment self rimming topmount sink with faucet ledge, 18 gauge (1.2 mm), type 316/316L stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes type 316 waste assembly. Certified to ASME A112.19.3-2008 / CSA B45.4-08

Faucet hole options (add to part number when ordering):

- 1 1 hole, centered
- 2 2 hole, 8" spread
- 3 3 hole, 8" spread, centered

Model LBS6808-316P-1 shown




MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	FAUCET HOLE OPTIONS	PRICE
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
LBS4607-316P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	7" (178 mm)	C	1,3	\$ 958
LBS4610-316P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	10" (254 mm)	C	1,2,3	\$ 1,163
LBS6407-316P-1	20 9/16" (522 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	7" (178 mm)	CB	1,3	\$ 1,046
LBS6807-316P-1	20 9/16" (522 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	7" (178 mm)	CB	1,3	\$ 1,065
LBS6808-316P-1	20 9/16" (522 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	1,3	\$ 1,174
LBS6810-316P-1	20 9/16" (522 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	CB	1,3	\$ 1,240

Double bowl topmount type 316 stainless steel



Double bowl with faucet ledge, T316 LBD6408-316P-1

Gauge 18
Type 316/316L Stainless Steel
Outside dimensions 20 1/2" x 31 1/4"
Inside bowl 16" x 14" x 8"
Waste location **Center back**
3 1/2" (89 mm) type 316 waste assemblies included
Minimum cabinet size 36"

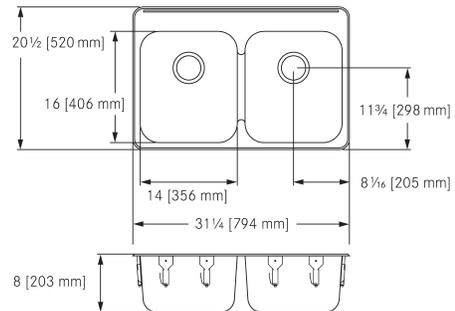


\$ 1,790




Double bowl with faucet ledge, T316 LBD6410-316PCB-1

Gauge 18
Type 316/316L Stainless Steel
Outside dimensions 20 13/16" x 31 1/4"
Inside bowl 16" x 14" x 10"
Waste location **Center back**
3 1/2" (89 mm) type 316 waste assemblies included
Minimum cabinet size 36"

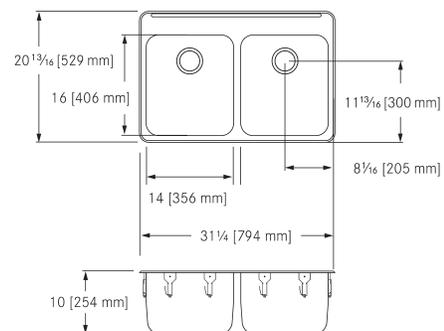

\$ 2,128

Undermount type 316 stainless steel



Model UCS4608-316P-1 shown




Single compartment undermount sink, 18 gauge (1.2 mm), type 316/316L stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Template and installation instructions included. Certified to ASME A112.19.3/CSA B45.4.

🦽	MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
	UCS4608-316P-1	16 1/8" (486 mm)	18 1/8" (969 mm)	14" (432 mm)	16" (914 mm)	8" (203 mm)	C	18	\$ 958
	UCS6808-316P-1	18 1/8" (486 mm)	16 1/8" (969 mm)	16" (432 mm)	14" (914 mm)	8" (203 mm)	C	18	\$ 1,021
	UCS6810-316P-1	18 1/8" (486 mm)	16 1/8" (1578 mm)	16" (432 mm)	14" (1524 mm)	10" (203 mm)	C	18	\$ 1,078

Single bowl topmount drainboard, type 316




Drainboard left, T316
LBSDBL6810-316P-1
 Gauge **18**
Type 316/316L Stainless Steel
 Outside dimensions **20 9/16" x 40"**
 Inside bowl **16 x 18 x 10"**
 Waste location **Center**
 3 1/2" (89 mm) type 316 crumb cup waste assembly included
 Minimum cabinet size 48"

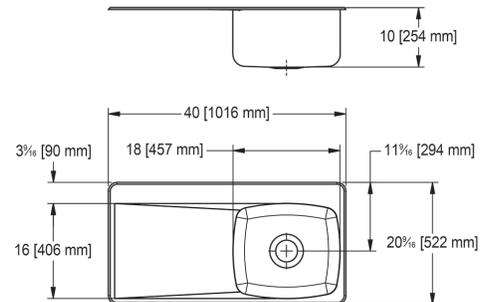

\$ 3,813




Drainboard right, T316
LBSDBR6810-316P-1
 Gauge **18**
Type 316/316L Stainless Steel
 Outside dimensions **20 9/16" x 40"**
 Inside bowl **16 x 18 x 10"**
 Waste location **Center**
 3 1/2" (89 mm) type 316 crumb cup waste assembly included
 Minimum cabinet size 48"

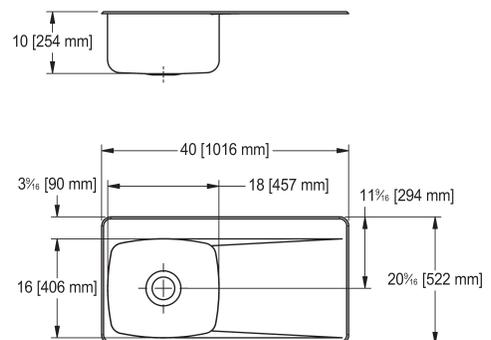

\$ 3,813

Art room sinks, topmount, no ledge, type 316

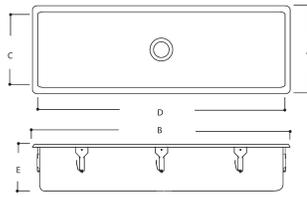

Model ART48-1 shown




Single compartment self rimming topmount sink, 18 gauge (1.2 mm), corrosion resistant type 316/316L stainless steel, #4 satin finish. Undercoated to reduce condensation and resonance. Factory applied rim seal and factory installed EZ TORQUE™ fasteners. Includes type 316 waste assembly. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Models ending in -1: 3 1/2" type 316 stainless steel crumb cup strainer assembly with 1 1/2" tailpiece included.

Models ending in -3C: 1 1/2" type 316 stainless steel duplex waste assembly with rubber stopper included.

MODEL	Overall Dimensions		Sink Compartment Dimensions			WASTE LOCATION	GAUGE	PRICE
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
ART36-316-1	19 1/8" (486 mm)	38 1/8" (969 mm)	17" (432 mm)	36" (914 mm)	8" (203 mm)	C	18	\$ 3,258
ART36-316-3C	19 1/8" (486 mm)	38 1/8" (969 mm)	17" (432 mm)	36" (914 mm)	8" (203 mm)	C	18	\$ 3,258
ART48-316-1	19 1/8" (486 mm)	50 1/8" (1273 mm)	17" (432 mm)	48" (1219 mm)	8" (203 mm)	C	18	\$ 3,578
ART48-316-3C	19 1/8" (486 mm)	50 1/8" (1273 mm)	17" (432 mm)	48" (1219 mm)	8" (203 mm)	C	18	\$ 3,578
ART60-316-1	19 1/8" (486 mm)	62 1/8" (1578 mm)	17" (432 mm)	60" (1524 mm)	8" (203 mm)	C	18	\$ 3,894
ART60-316-3C	19 1/8" (486 mm)	62 1/8" (1578 mm)	17" (432 mm)	60" (1524 mm)	8" (203 mm)	C	18	\$ 3,894

Scullery sink, 16 gauge, type 316

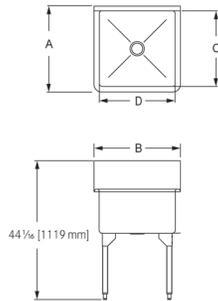

Model SL2424-316-1 shown



Single bowl scullery sink, 16 gauge (1.5 mm), corrosion resistant type 316/316L stainless steel, #4 satin finish. Sink compartment sloped to drain. Radius coved corners front and back only. Floor to rim height is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes waste assembly in type 316 stainless steel. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Models ending in -1: 3 1/2" type 316 stainless steel crumb cup strainer assembly with 1 1/2" tailpiece included.

Models ending in -5: 1 1/2" type 316 stainless steel duplex waste assembly with rubber stopper included, 1 1/2" (DN38) tailpiece, standpipe, and guard.

MODEL	Overall Dimensions		Sink Compartment Dimensions				WASTE LOCATION	GAUGE	PRICE
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH	F BACKSPLASH			
SL2424-316-1	27 3/16" (691 mm)	27 3/16" (691 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	C	16	\$ 5,867
SL2424-316-5	27 3/16" (691 mm)	27 3/16" (691 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	RR	16	\$ 6,183
SL2448-316-1	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	48" (1219 mm)	14" (356 mm)	9" (229 mm)	C	16	\$ 8,879
SL2448-316-5	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	48" (1219 mm)	14" (356 mm)	9" (229 mm)	RR	16	\$ 9,671


Type 316 stainless steel sinks



Wall mount sink, 6" deep, T316
WHB1617-316-3
 Gauge **18**
TYPE 316/316L Stainless Steel
 Outside dimensions **16 1/2 x 17"**
 Inside bowl **14 x 12 x 6"**
Waste fitting type 316, 1 1/2" duplex
 waste assembly with rubber stopper
 included
 Waste location **Center back**




\$1,491

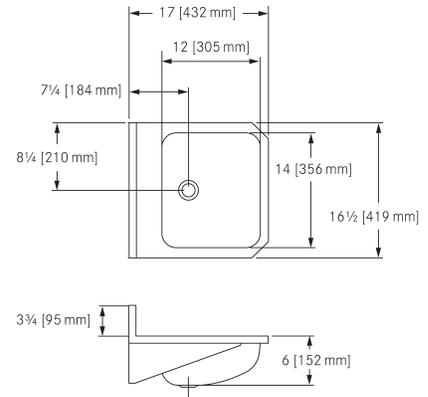

Wall mount sink, 7" deep, T316
WHB1819-316-3
 Gauge **18**
TYPE 316/316L Stainless Steel
 Outside dimensions **18 1/2 x 19"**
 Inside bowl **16 x 14 x 7"**
Waste fitting type 316, 1 1/2" duplex
 waste assembly with rubber stopper
 included
 Waste location **Center**




\$1,656

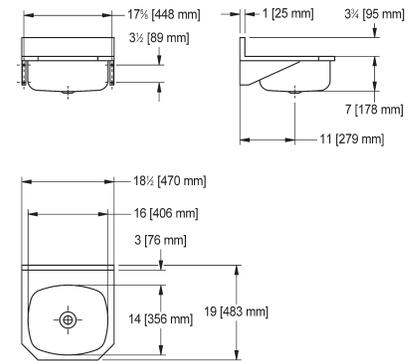

Cup sink, oval, T316
OC6-316
 Gauge **20**
TYPE 316/316L Stainless Steel
 Outside dimensions **7 1/2 x 4 1/2"**
 Inside bowl **6 x 3 x 3 11/16"**
Waste fitting Integral type 316, 1 1/2"
 duplex waste assembly included
 Waste location **Center**




\$ 500

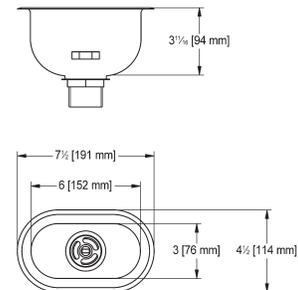

Mop Sinks, type 316




Single wall installation, T316
FSS151509-316-1
 Gauge 16
TYPE 316/316L Stainless Steel
 Outside dimensions **17 1/2 x 17 1/2"**
 Inside bowl **15 x 15 x 9 1/8"**
Waste fitting 2" IPS grid shower drain
 included
 Waste location **Center**

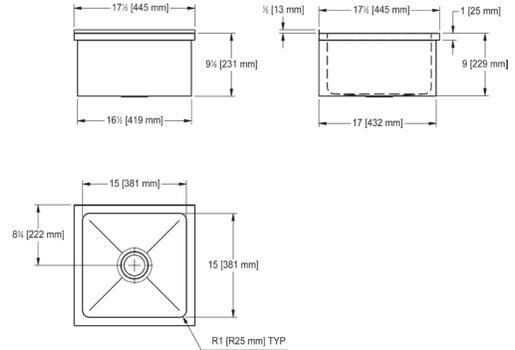

\$ 4,537




Corner installation, T316
FSS222210-316-1
 Gauge 16
TYPE 316/316L Stainless Steel
 Outside dimensions **24 x 24"**
 Inside bowl **21 1/2 x 21 1/2 x 10"**
Waste fitting 2" IPS grid shower drain
 included
 Waste location **Center**

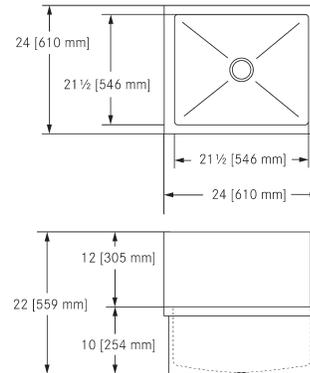


\$ 6,176




Corner installation, T316
FSSL223410-316-1
 Gauge 16
TYPE 316/316L Stainless Steel
 Side splash on left
 Outside dimensions **24 x 36"**
 Inside bowl **21 1/2 x 33 1/2 x 10"**
Waste fitting 2" IPS grid shower drain
 included
 Waste location **Center**

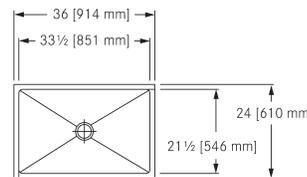


\$ 7,891

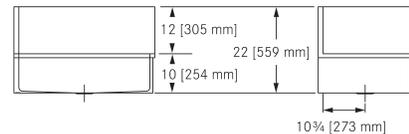

Corner installation, T316
FSSR223410-316-1
 Gauge 16
TYPE 316/316L Stainless Steel
 Side splash on right
 Outside dimensions **24 x 36"**
 Inside bowl **21 1/2 x 33 1/2 x 10"**
Waste fitting 2" IPS grid shower drain
 included
 Waste location **Center**

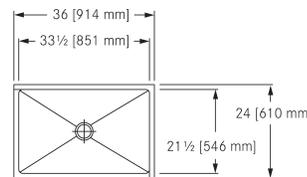



\$ 7,891

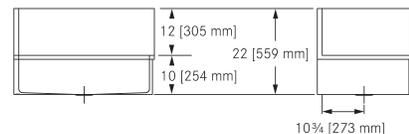

Mop Sinks, type 316





Corner installation, T316
FSS2210-316-1
 Gauge 16
TYPE 316/316L Stainless Steel
 Outside dimensions **24 x 24"**
 Inside bowl **21 1/2 x 21 1/2 x 10"**
Waste fitting 2" IPS grid shower drain included
 Waste location **Center**

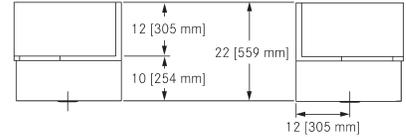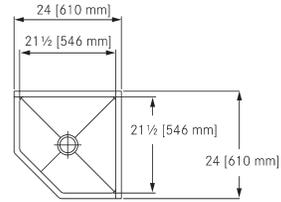

\$ 9,056





Corner installation, low front, T316
FSSO2210-316-1
 Gauge 16
TYPE 316/316L Stainless Steel
 Outside dimensions **24 x 24"**
 Inside bowl **21 1/2 x 21 1/2 x 6"**
Waste fitting 2" IPS grid shower drain included
 Waste location **Center**

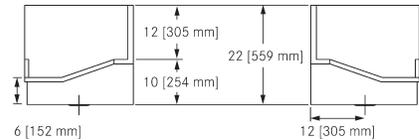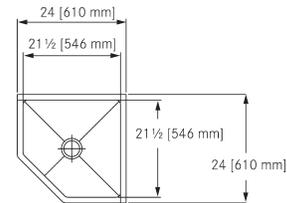

\$ 9,056





Low front, T316
FSSOL223410-316-1
 Gauge 16
TYPE 316/316L Stainless Steel
 Side splash on left
 Outside dimensions **24 x 36"**
 Inside bowl **21 1/2 x 33 1/2 x 6"**
Waste fitting 2" IPS grid shower drain included
 Waste location **Center**

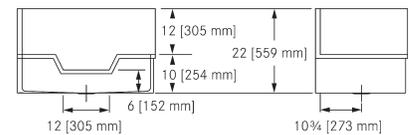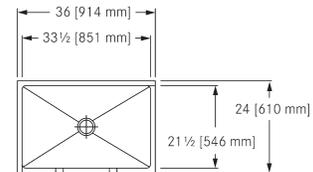

\$ 9,290



Low front, T316
FSSOR223410-316-1
 Gauge 16
TYPE 316/316L Stainless Steel
 Side splash on right
 Outside dimensions **24 x 36"**
 Inside bowl **21 1/2 x 33 1/2 x 6"**
Waste fitting 2" IPS grid shower drain included
 Waste location **Center**

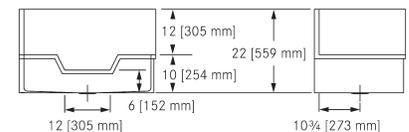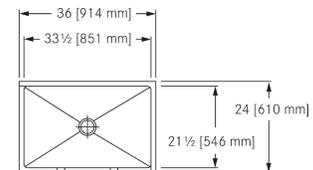


\$ 9,290

Utility & Scullery



21	Wall trough utility sinks
22	Sewage sampling
24	Scullery sinks, Classic
26	Scullery sinks, Service
29	Scullery sinks, Restaurant
32	Scullery sinks, World Class
35	Mop sinks
36	Pet wash station

Wall trough utility sink, 16 gauge

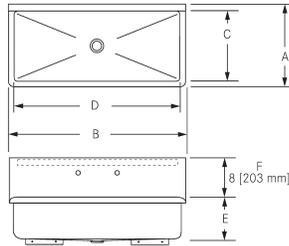


Single compartment wall trough, 16 gauge (1.5 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Radius covered bowl corners, rolled radius rim. Center waste location. 3 1/2" (89 mm) waste fitting with crumb cup strainer included. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Model WTS36-1 shown



MODEL	Overall Dimensions		Sink Compartment Dimensions				GAUGE	PRICE
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH	F BACKSPLASH		
WTS36-1	18" (457 mm)	36" (914 mm)	14 3/4" (375 mm)	33 1/2" (851 mm)	8" (203 mm)	8" (203 mm)	16	\$ 4,265
WTS48-1	18" (457 mm)	48" (1219 mm)	14 3/4" (375 mm)	44 1/2" (1130 mm)	8" (203 mm)	8" (203 mm)	16	\$ 4,425
WTS60-1	18" (457 mm)	60" (1524 mm)	14 3/4" (375 mm)	56 1/2" (1435 mm)	8" (203 mm)	8" (203 mm)	16	\$ 4,694
WTS72-1	18" (457 mm)	72" (1829 mm)	14 3/4" (375 mm)	68 1/2" (1740 mm)	8" (203 mm)	8" (203 mm)	16	\$ 4,928

Wall trough utility sink, 14 gauge

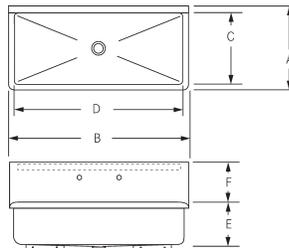

Single compartment wall trough, 14 gauge (2.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Radius covered bowl corners, rolled radius rim. Center waste location. 3 1/2" (89 mm) waste fitting with crumb cup strainer included. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Model WTS2036-1 shown



MODEL	Overall Dimensions		Sink Compartment Dimensions				GAUGE	PRICE
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH	F BACKSPLASH		
WTS2025-1	20" (508 mm)	25" (635 mm)	16 1/2" (419 mm)	22" (559 mm)	10 1/2" (267 mm)	6" (152 mm)	14	\$ 3,631
WTS2031-1	20" (508 mm)	31" (787 mm)	16 1/2" (419 mm)	28" (711 mm)	10 1/2" (267 mm)	6" (152 mm)	14	\$ 3,813
WTS2036-1	20" (508 mm)	36" (914 mm)	16 1/2" (419 mm)	33" (838 mm)	8" (203 mm)	10" (254 mm)	14	\$ 4,692
WTS2048-1	20" (508 mm)	48" (1219 mm)	16 1/2" (419 mm)	45" (1143 mm)	8" (203 mm)	10" (254 mm)	14	\$ 4,867
WTS2060-1	20" (508 mm)	60" (1524 mm)	16 1/2" (419 mm)	57" (1448 mm)	8" (203 mm)	10" (254 mm)	14	\$ 5,164
WTS2072-1	20" (508 mm)	72" (1829 mm)	16 1/2" (419 mm)	69" (1753 mm)	8" (203 mm)	10" (254 mm)	14	\$ 5,419
WTS2096-1	20" (508 mm)	96" (2438 mm)	16 1/2" (419 mm)	93" (2362 mm)	8" (203 mm)	10" (254 mm)	14	\$ 5,870


Sewage sampling sinks



Sewage sampling sink, single bowl no drainboard SSS1827

Single compartment sewage sampling sink. 14 gauge (2.0 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius covered bowl corners. Anti-splash rim. Stainless steel $\frac{3}{4}$ " (19 mm) O.D. flushing tube with $\frac{1}{2}$ " (13 mm) NPS connection. 3" x 3" (76 x 76 mm) threaded waste outlet. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Please allow 6 weeks for delivery. Inside bowl **14 x 18 x 15"**


\$ 13,873

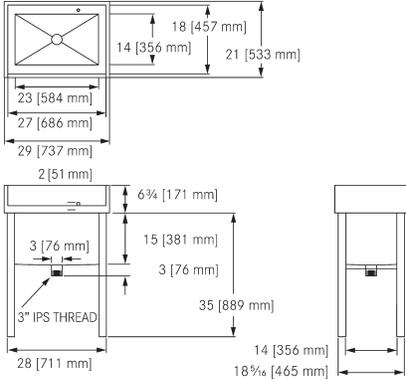

Sewage sampling sink, single bowl, left drainboard SSS1827SDSL

Single compartment sewage sampling sink left drainboard. 14 gauge (2.0 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius covered bowl corners. Anti-splash rim. Stainless steel $\frac{3}{4}$ " (19 mm) O.D. flushing tube with $\frac{1}{2}$ " (13 mm) NPS connection. 3 x 3" (76 x 76 mm) threaded waste outlet. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Please allow 6 weeks for delivery. Left drainboard. Inside bowl **14 x 18 x 15"**

\$ 14,908

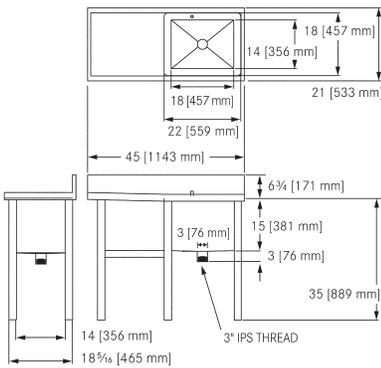

Sewage sampling sinks



Sewage sampling sink, single bowl, right drainboard SSS1827SDSR


Single compartment sewage sampling sink right drainboard. 14 gauge (2.0 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Anti-splash rim. Stainless steel $\frac{3}{4}$ " (19 mm) O.D. flushing tube with $\frac{1}{2}$ " (13 mm) NPS connection. 3" x 3" (76 x 76 mm) threaded waste outlet. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Please allow 6 weeks for delivery.

Right drainboard.

Inside bowl **14 x 18 x 15"**

\$ 14,908

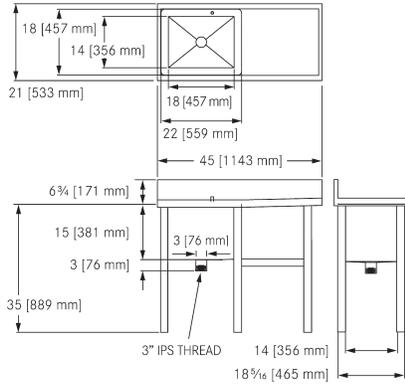

Sewage sampling sink, left and right drainboards SSS1827DDS

Single compartment sewage sampling sink left and right drainboard. 14 gauge (2.0 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners.


Anti-splash rim. Stainless steel $\frac{3}{4}$ " (19 mm) O.D. flushing tube with $\frac{1}{2}$ " (13 mm) NPS connection. 3" x 3" (76 x 76 mm) threaded waste outlet. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Please allow 6 weeks for delivery.

Double drainboards.

Inside bowl **14 x 18 x 15"**


\$ 18,424

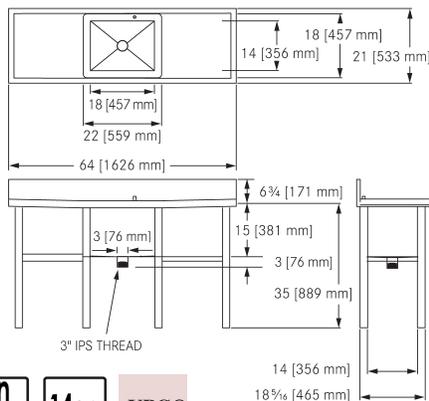

Scullery sinks, Classic series



Model SL2424-1 shown

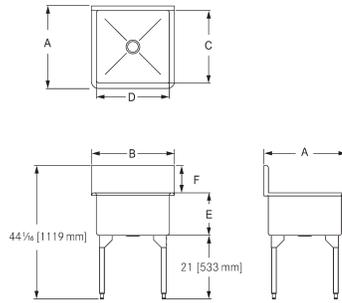

Single bowl scullery sink, 16 gauge (1.5 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartment sloped to drain, radius covered corners front and back only. Floor to rim height 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes waste assembly.

Standard faucet hole option: 2 hole, 1 1/4" (32 mm) diameter, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models.

Certified to ASME A112.19.3-2008 / CSA B45.4-08.


Models ending in -1: 3 1/2" crumb cup strainer assembly with 1 1/2" stainless steel tailpiece included.

Models ending in -5: 1 1/2" duplex waste assembly with rubber stopper, 1 1/2" (DN38) tailpiece, standpipe, and guard included.

MODEL	Overall Dimensions		Sink Compartment Dimensions				WASTE LOCATION	GAUGE	PRICE
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH	F BACKSPLASH			
SL2424-1	27 3/16" (691 mm)	27 3/16" (691 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	C	16	\$ 1,580
SL2424-5	27 3/16" (691 mm)	27 3/16" (691 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	RR	16	\$ 1,725
SL2448-1	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	48" (1219 mm)	14" (356 mm)	9" (229 mm)	C	16	\$ 2,443
SL2448-5	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	48" (1219 mm)	14" (356 mm)	9" (229 mm)	RR	16	\$ 2,587



Model DL2448-1 shown

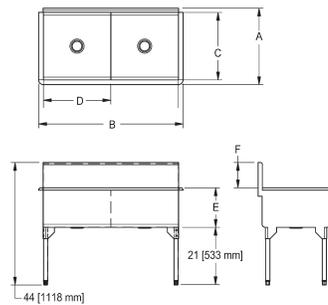

Double bowl scullery sink, 16 gauge (1.5 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartment sloped to drain, radius covered corners front and back only. Floor to rim height 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes waste assemblies.

Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models.

Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Models ending in -1: 3 1/2" crumb cup strainer assembly with 1 1/2" stainless steel tailpiece included.


Models ending in -5: 1 1/2" duplex waste assembly with rubber stopper, 1 1/2" (DN38) tailpiece, standpipe, and guard included.

MODEL	Overall Dimensions		Sink Compartment Dimensions				WASTE LOCATION	GAUGE	PRICE
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH	F BACKSPLASH			
DL2448-1	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	C	16	\$ 2,443
DL2448-5	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	RR, LR	16	\$ 2,587

Scullery sinks, Classic series



Model TL2454-1 shown

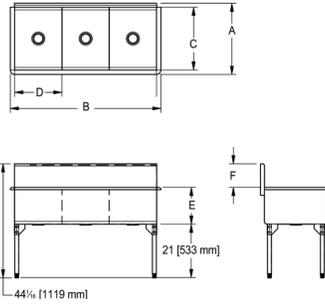

Triple bowl scullery sink, 16 gauge (1.5 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartment sloped to drain, radius covered corners front and back only. Floor to rim height 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes waste assemblies.

Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Certified to ASME A112.19.3-2008 / CSA B45.4-08

Models ending in -1: 3 1/2" crumb cup strainer assembly with 1 1/2" stainless steel tailpiece included.

Models ending in -5: 1 1/2" duplex waste assembly with rubber stopper, 1 1/2" (DN38) tailpiece, standpipe, and guard included.

MODEL	Overall Dimensions		Sink Compartment Dimensions				WASTE LOCATION	GAUGE	PRICE
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH	F BACKSPLASH			
TL2454-1	27 3/16" (691 mm)	57 3/8" (1457 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	C	16	\$ 3,593
TL2454-5	27 3/16" (691 mm)	57 3/8" (1457 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	RR, RR, LR	16	\$ 3,736
TL2472-1	27 3/16" (691 mm)	75 3/8" (1915 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	C	16	\$ 4,454
TL2472-5	27 3/16" (691 mm)	75 3/8" (1915 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	RR, RR, LR	16	\$ 4,599




Removable drainboard for Classic series scullery sinks CL-DB

Removable drainboard for Classic series scullery sinks. 16 gauge (1.5 mm) type 304 stainless steel. Polished to a satin finish. The legs have adjustable feet and are interchangeable such that the product can be installed on either the left or right of the scullery.

Outside dimensions **23 x 24 x 36"**

Install on **left or right**

\$ 1,130

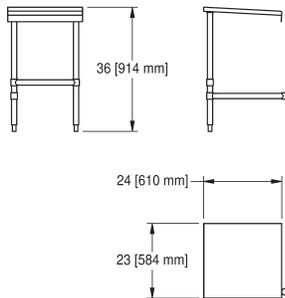

Scullery sinks, Service series, single compartment



Model SSL2424-1 shown

Single bowl scullery sink with square bowl corners. 14 gauge (2.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartment sloped to center drain, radius coved corners front and back only. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece.

Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm).

Standard faucet hole option: 2 hole, 1 1/4" (32 mm) diameter, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Please allow 6 weeks for delivery, these models are built to order and non-returnable.

Certified to ASME A112.19.3-2008 / CSA B45.4-08.



Single compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
SSL2418-1	30 1/2" (775 mm)	22 1/4" (565 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 4,526
SSL2424-1	30 1/2" (775 mm)	28 1/4" (718 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 5,097

Single compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
SSL2418L-1	30 1/2" (775 mm)	40 1/4" (1022 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 5,666
SSL2418R-1	30 1/2" (775 mm)	40 1/4" (1022 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 5,666
SSL2424L-1	30 1/2" (775 mm)	52 1/4" (1327 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 6,234
SSL2424R-1	30 1/2" (775 mm)	52 1/4" (1327 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 6,234

Single compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
SSL2418LR-1	30 1/2" (775 mm)	58 1/4" (1480 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L&R	14	\$ 6,804
SSL2424LR-1	30 1/2" (775 mm)	76 1/4" (1937 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L&R	14	\$ 6,804

Scullery sinks, Service series, double compartment



Double bowl scullery sink with square bowl corners. 14 gauge (2.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartments sloped to center drain, radius coved corners front and back only. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece.

Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm).

Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Please allow 6 weeks for delivery, these models are built to order and non-returnable. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Model SDL2448-1 shown



Double compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
SDL2436-1	30 1/2" (775 mm)	42 1/4" (1073 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 7,374
SDL2448-1	30 1/2" (775 mm)	54 1/4" (1378 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 7,941

Double compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
SDL2436L-1	30 1/2" (775 mm)	60 1/4" (1530 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 8,510
SDL2436R-1	30 1/2" (775 mm)	60 1/4" (1530 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 8,510
SDL2448L-1	30 1/2" (775 mm)	78 1/4" (1988 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 9,081
SDL2448R-1	30 1/2" (775 mm)	78 1/4" (1988 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 9,081

Double compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
SDL2436LR-1	30 1/2" (775 mm)	78 1/4" (1988 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L&R	14	\$ 9,652
SDL2448LR-1	30 1/2" (775 mm)	102 1/4" (2597 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L&R	14	\$ 10,221

Scullery sinks, Service series, triple compartment



Model STL2472-1 shown

Triple bowl scullery sink with square bowl corners. 14 gauge (2.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartments sloped to center drain, radius coved corners front and back only. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece.

Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm).

Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models.

Please allow 6 weeks for delivery, these models are built to order and non-returnable. Certified to ASME A112.19.3-2008 / CSA B45.4-08.




Triple compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
STL2454-1	30 1/2" (775 mm)	60 1/4" (1530 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 9,081
STL2472-1	30 1/2" (775 mm)	78 1/4" (1988 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 11,927

Triple compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
STL2454L-1	30 1/2" (775 mm)	78 1/4" (1988 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 10,221
STL2454R-1	30 1/2" (775 mm)	78 1/4" (1988 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 10,221
STL2472L-1	30 1/2" (775 mm)	102 1/4" (2597 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 13,068
STL2472R-1	30 1/2" (775 mm)	102 1/4" (2597 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 13,068

Triple compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
STL2454LR-1	30 1/2" (775 mm)	96 1/4" (2445 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L&R	14	\$ 11,358
STL2472LR-1	30 1/2" (775 mm)	126 1/4" (3207 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L&R	14	\$ 14,203

Scullery sinks, Restaurant series, single compartment



Single bowl scullery sink with radius coved corners, constructed with hygiene and food safety in mind. 16 gauge (1.5 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartment sloped to center drain, radius coved corners that are easy to clean. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm). Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Please allow 6 weeks for delivery, these models are built to order and non-returnable. Product compliance ASME A112.19.3/ CSA B45.4, NSF 2.

Model RSL2424-1 shown



Single compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
RSL2418-1	30 1/2" (775 mm)	22 1/4" (565 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	16	\$ 5,000
RSL2424-1	30 1/2" (775 mm)	28 1/4" (718 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	16	\$ 5,266

Single compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
RSL2418L-1	30 1/2" (775 mm)	40 1/4" (1022 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	16	\$ 6,179
RSL2418R-1	30 1/2" (775 mm)	40 1/4" (1022 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	16	\$ 6,179
RSL2424L-1	30 1/2" (775 mm)	52 1/4" (1327 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	16	\$ 6,442
RSL2424R-1	30 1/2" (775 mm)	52 1/4" (1327 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	16	\$ 6,442

Single compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
RSL2418LR-1	30 1/2" (775 mm)	58 1/4" (1480 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L&R	16	\$ 7,355
RSL2424LR-1	30 1/2" (775 mm)	76 1/4" (1937 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L&R	16	\$ 7,619

Scullery sinks, Restaurant series, double compartment




Double bowl scullery sink with radius covered corners, constructed with hygiene and food safety in mind. 16 gauge (1.5 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartments sloped to center drain, radius covered corners that are easy to clean. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm). Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Please allow 6 weeks for delivery, these models are built to order and non-returnable. Product compliance ASME A112.19.3/ CSA B45.4, NSF 2.

Model RDL2448-1 shown




Double compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
RDL2436-1	30 1/2" (775 mm)	44 1/4" (1121 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	16	\$ 7,619
RDL2448-1	30 1/2" (775 mm)	56 1/8" (1425 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	16	\$ 8,209

Double compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
RDL2436L-1	30 1/2" (775 mm)	62 1/8" (1578 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	16	\$ 8,794
RDL2436R-1	30 1/2" (775 mm)	62 1/8" (1578 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	16	\$ 8,794
RDL2448L-1	30 1/2" (775 mm)	80 1/8" (2035 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	16	\$ 9,382
RDL2448R-1	30 1/2" (775 mm)	80 1/8" (2035 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	16	\$ 9,382

Double compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
RDL2436LR-1	30 1/2" (775 mm)	80 1/8" (2035 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L & R	16	\$ 9,972
RDL2448LR-1	30 1/2" (775 mm)	104 1/8" (2645 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L & R	16	\$ 10,559

Scullery sinks, Restaurant series, triple compartment



Model RTL2472-1 shown

Triple bowl scullery sink with radius covered corners, constructed with hygiene and food safety in mind. 16 gauge (1.5 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartments sloped to center drain, radius covered corners that are easy to clean. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece.

Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm).

Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models.

Please allow 6 weeks for delivery, these models are built to order and non-returnable. Product compliance ASME A112.19.3/ CSA B45.4, NSF 2.




Triple compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
RTL2454-1	30 1/2" (775 mm)	64 1/8" (1629 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	16	\$ 11,737
RTL2472-1	30 1/2" (775 mm)	82 1/8" (2086 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	16	\$ 12,324

Triple compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
RTL2454L-1	30 1/2" (775 mm)	78 1/8" (1984 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	16	\$ 12,915
RTL2454R-1	30 1/2" (775 mm)	78 1/8" (1984 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	16	\$ 12,915
RTL2472L-1	30 1/2" (775 mm)	106 1/8" (2695 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	16	\$ 13,502
RTL2472R-1	30 1/2" (775 mm)	106 1/8" (2695 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	16	\$ 13,502

Triple compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
RTL2454LR-1	30 1/2" (775 mm)	92 1/8" (2340 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L & R	16	\$ 14,090
RTL2472LR-1	30 1/2" (775 mm)	130 1/8" (3305 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L & R	16	\$ 14,678

Scullery sinks, World Class series, single compartment



Single bowl scullery sink with radius covered bowl corners, constructed with hygiene and food safety in mind. 14 gauge (2.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartment sloped to center drain, radius covered corners that are easy to clean. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assembly with 1 1/2" (DN38) stainless steel tailpiece. Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm). Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Please allow 6 weeks for delivery, these models are built to order and non-returnable. Product compliance ASME A112.19.3/ CSA B45.4, NSF 2.

Model WSL2424-1 shown




Single compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
WSL2418-1	30 1/2" (775 mm)	22 1/4" (565 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 5,744
WSL2424-1	30 1/2" (775 mm)	28 1/4" (718 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 6,386

Single compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
WSL2418L-1	30 1/2" (775 mm)	40 1/4" (1022 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 7,028
WSL2418R-1	30 1/2" (775 mm)	40 1/4" (1022 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 7,028
WSL2424L-1	30 1/2" (775 mm)	52 1/4" (1327 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 7,669
WSL2424R-1	30 1/2" (775 mm)	52 1/4" (1327 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 7,669

Single compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
WSL2418LR-1	30 1/2" (775 mm)	58 1/4" (1480 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L&R	14	\$ 8,311
WSL2424LR-1	30 1/2" (775 mm)	76 1/4" (1937 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L&R	14	\$ 8,952

Scullery sinks, World Class series, double compartment




Model WDL2448-1 shown

Double bowl scullery sink with radius covered bowl corners, constructed with hygiene and food safety in mind. 14 gauge (2.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartments sloped to center drain, radius covered corners that are easy to clean. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm). Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Please allow 6 weeks for delivery, these models are built to order and non-returnable. Product compliance ASME A112.19.3/ CSA B45.4, NSF 2.




Double compartment without drainboard




	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
WDL2436-1	30 1/2" (775 mm)	44 1/4" (1121 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 8,952
WDL2448-1	30 1/2" (775 mm)	56 1/8" (1425 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 9,596

Double compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
WDL2436L-1	30 1/2" (775 mm)	62 1/8" (1578 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 10,236
WDL2436R-1	30 1/2" (775 mm)	62 1/8" (1578 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 10,236
WDL2448L-1	30 1/2" (775 mm)	80 1/8" (2035 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 10,877
WDL2448R-1	30 1/2" (775 mm)	80 1/8" (2035 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 10,877

Double compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
WDL2436LR-1	30 1/2" (775 mm)	80 1/8" (2035 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L&R	14	\$ 11,521
WDL2448LR-1	30 1/2" (775 mm)	104 1/8" (2645 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L&R	14	\$ 12,162

Scullery sinks, World Class series, triple compartment



Model WDL2448-1 shown

Triple bowl scullery sink with radius covered bowl corners, constructed with hygiene and food safety in mind. 14 gauge (2.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish. Sink compartments sloped to center drain, radius covered corners that are easy to clean. Finished with rolled rim. Floor to rim height on all models is 35" (890 mm). Stainless steel tubular legs with adjustable feet. Includes 3 1/2" (89 mm) crumb cup waste assemblies with 1 1/2" (DN38) stainless steel tailpiece. Drainboard has same dimensions as sink compartment: 24" x 18" (610 x 457 mm) or 24" x 24" (610 x 610 mm). Standard faucet hole option: 2 hole, 8" (203 mm) centerset, positioned 4" (102 mm) below top of backsplash. Custom faucet hole drillings are available on all models. Please allow 6 weeks for delivery, these models are built to order and non-returnable. Product compliance ASME A112.19.3/ CSA B45.4, NSF 2.




Triple compartment without drainboard



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
WTL2454-1	30 1/2" (775 mm)	64 1/8" (1629 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 14,086
WTL2472-1	30 1/2" (775 mm)	82 1/8" (2086 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	-	14	\$ 14,728

Triple compartment with drainboard left or right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
WTL2454L-1	30 1/2" (775 mm)	78 1/8" (1984 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 15,369
WTL2454R-1	30 1/2" (775 mm)	78 1/8" (1984 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 15,369
WTL2472L-1	30 1/2" (775 mm)	106 1/8" (2695 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L	14	\$ 16,014
WTL2472R-1	30 1/2" (775 mm)	106 1/8" (2695 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	R	14	\$ 16,014

Triple compartment with drainboard left and right



	Overall Dimensions		Sink Compartment Dimensions				D.BOARD LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH			
WTL2454LR-1	30 1/2" (775 mm)	92 1/8" (2340 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	L&R	14	\$ 16,654
WTL2472LR-1	30 1/2" (775 mm)	130 1/8" (3305 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	L&R	14	\$ 17,296

Mop utility sinks



Mop sinks, boot wash stations in Type 316 stainless steel



Model FSSOR223410-316-1 shown

	Overall Dimensions		Sink Compartment Dimensions			FRONT EDGE STYLE	SPLASH LOCATION	GAUGE	PRICE
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH				
FSS151509-316-1	17 1/2" (445 mm)	17 1/2" (445 mm)	15" (381 mm)	15" (381 mm)	9 1/4" (231 mm)	Straight	-	16	\$ 4,537
FSS222210-316-1	24" (610 mm)	24" (610 mm)	21 1/2" (546 mm)	21 1/2" (546 mm)	10" (254 mm)	Straight	L&R	16	\$ 6,176
FSSL223410-316-1	24" (610 mm)	36" (914 mm)	21 1/2" (546 mm)	33 1/2" (851 mm)	10" (254 mm)	Straight	L	16	\$ 7,891
FSSR223410-316-1	24" (610 mm)	36" (914 mm)	21 1/2" (546 mm)	33 1/2" (851 mm)	10" (254 mm)	Square front	R	16	\$ 7,891
FSS2210-316-1	24" (610 mm)	24" (610 mm)	21 1/2" (546 mm)	21 1/2" (546 mm)	10" (254 mm)	Angular front	L&R	16	\$ 9,056
FSSO2210-316-1	24" (610 mm)	24" (610 mm)	21 1/2" (546 mm)	21 1/2" (546 mm)	10" (254 mm)	Drop front	L&R	16	\$ 9,056
FSSOL223410-316-1	24" (610 mm)	36" (914 mm)	21 1/2" (546 mm)	33 1/2" (851 mm)	10" (254 mm)	Drop front	L	16	\$ 9,290
FSSOR223410-316-1	24" (610 mm)	36" (914 mm)	21 1/2" (546 mm)	33 1/2" (851 mm)	10" (254 mm)	Drop front	R	16	\$ 9,290



Detailed specification information on MOP SINKS can be found on pages 18 & 19

Pet Wash Station



Pet wash station

PWS-50

18 gauge (1.0 mm), Type 304 (CNS 18/10) stainless steel, #4 satin finish.

This pet wash station features a lift out front access door with pull out ramp and vandal resistant height adjustable inner trays. Both the ramp and trays feature anti slip surface. Upper bar features adjustable tether point for leash. Each tray has 2 handles that double as a lower tether point to keep the pets safe and prevent jumping out of the fixture.


Supplied with 3 1/2" waste fitting with T316 grid and OFK150 overflow kit to reduce chance of flooding if the waste fills with hair.

Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Outside dimensions **24 15/16" x 49 7/8" x 59 1/8"**

Inside bowl **22 x 47 7/8" x 20"**

Waste location **Center**

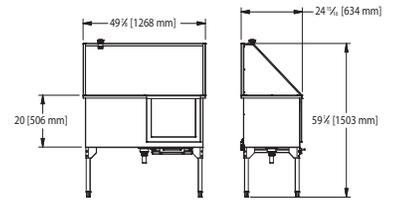

Pet wash station features



- Adjustable tether point for leash on upper bar
- High side splashes to keep water contained
- Height adjustable inner trays
- Lift-out front access door
- Anti-slip surfaces on pull-out ramp

Pet wash stations



Pictured left to right: WTS60-1 trough sink, FSSOL223410-316-1 and FSSOR223410-316-1 mop sinks

Dog washing stations: a must in multifamily developments

Renters are living for their pets


Pet ownership in Canada increased throughout the pandemic and remains at very high levels. Over 60% of households own at least one dog or cat, and that includes apartment and condo dwellers.

Make space for pets in your floor plan

Most renters consider pet-friendly policies when choosing a place to live. A dog washing room on the main floor provides an accessible space for pet owners to clean off dirty paws or give their furbabies a full bath.

Options for dogs big and small


Floor-mounted sinks allow large dogs to step into without the need for lifting or guiding onto a ramp. A wall-mounted trough is perfect for smaller dogs to be placed for washing at a comfortable height. High backsplashes help keep the mess contained.

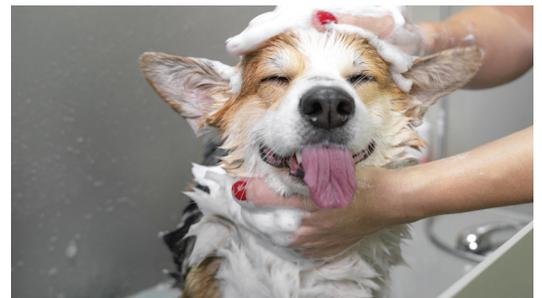

Vanity Basins



Oval vanity basin topmount no faucet ledge

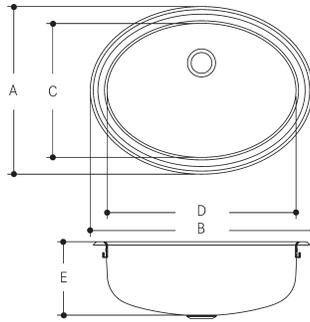

Model V1114-5 shown



Single compartment self rimming oval topmount vanity basin without faucet ledge. 18 gauge (1.2 mm), Type 304 (CNS 18/10) stainless steel with satin finish bowl, mirror finish rim. Center back waste location. Undercoated to reduce condensation and resonance. Factory applied rim seal. Includes cutout template and installation hardware.


Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Models that end in -5D or -6D include a 1 1/2" (38 mm) waste assembly with rubber stopper.

Models that end in -5 or -6 accept a 1 1/4" (32 mm) waste assembly, not included.

♿	MODEL	Overall Dimensions		Sink Compartment Dimensions			OVER-FLOW	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	V1114-5	10 7/8" (276 mm)	14 3/8" (365 mm)	8 1/8" (206 mm)	11 5/8" (295 mm)	5" (127 mm)	-	18	\$ 418
•	V1114-5D	10 7/8" (276 mm)	14 3/8" (365 mm)	8 1/8" (206 mm)	11 5/8" (295 mm)	5" (127 mm)	-	18	\$ 489
•	V1418-6	13 3/4" (349 mm)	18 1/4" (464 mm)	11" (279 mm)	15 1/2" (394 mm)	6" (152 mm)	-	18	\$ 539
•	OV1418-6	13 3/4" (349 mm)	18 1/4" (464 mm)	11" (279 mm)	15 1/2" (394 mm)	6" (152 mm)	Front	18	\$ 711

Round vanity basin topmount no faucet ledge

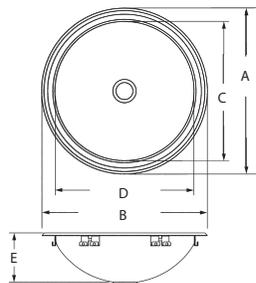

Model OV17-6 shown



Single compartment self rimming round topmount vanity basin without faucet ledge. 18 gauge (1.2 mm), Type 304 (CNS 18/10) stainless steel with satin finish bowl, mirror finish rim. Center back waste location. Undercoated to reduce condensation and resonance. Factory applied rim seal. Includes cutout template and installation hardware.

Certified to ASME A112.19.3-2008 / CSA B45.4-08.


Models that end in -5 or -6 accept a 1 1/4" (32 mm) waste assembly, not included.

♿	MODEL	Overall Dimensions		Sink Compartment Dimensions			OVER-FLOW	GAUGE	PRICE
		A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH			
•	V17-5	16 3/4" (425 mm)	16 3/4" (425 mm)	14" (356 mm)	14" (356 mm)	5" (127 mm)	-	18	\$ 566
•	V17-6	16 3/4" (425 mm)	16 3/4" (425 mm)	14" (356 mm)	14" (356 mm)	5" (127 mm)	-	18	\$ 637
•	OV17-6	16 3/4" (425 mm)	16 3/4" (425 mm)	14" (356 mm)	14" (356 mm)	6" (152 mm)	Front	18	\$ 686


Vanity basin topmount with faucet ledge




With ledge, 5" deep, overflow
OV1619-5-1 1 hole, centered
OV1619-5-3 3 hole, 4" centerset
 Gauge 18
 Outside dimensions **16 3/8 x 18 1/2"**
 Inside bowl **11 x 15 3/16 x 5"**
 Mirror finished rim, #4 satin finished bowl
 Integral **overflow** at back of bowl
 Accepts 1 1/4" (32 mm) overflow waste assembly,
 not included
 Waste location **Center back**
 Minimum cabinet size **24"**
\$ 716

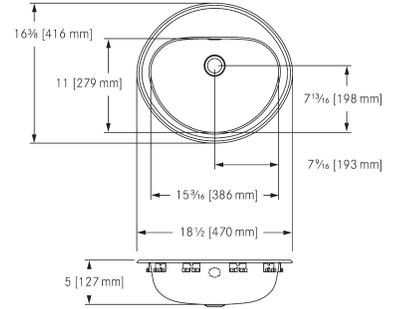


With ledge, 5" deep, no overflow
V1619-5-1 1 hole, centered
V1619-5-3 3 hole, 4" centerset
 Gauge 18
 Outside dimensions **16 3/8 x 18 1/2"**
 Inside bowl **11 x 15 3/16 x 5"**
 Mirror finished rim, #4 satin finished bowl
 Accepts 1 1/4" (32 mm) waste assembly, not
 included
 Waste location **Center back**
 Minimum cabinet size **24"**
\$ 711

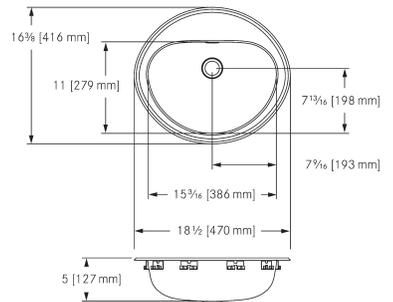

With ledge, 6" deep, overflow
OV1619-6-1 1 hole, centered
OV1619-6-3 3 hole, 4" centerset
 Gauge 18
 Outside dimensions **16 3/8 x 18 1/2"**
 Inside bowl **11 x 15 3/16 x 6"**
 Mirror finished rim, #4 satin finished bowl
 Integral **overflow** at back of bowl
 Accepts 1 1/4" (32 mm) overflow waste assembly,
 not included
 Waste location **Center back**
 Minimum cabinet size **24"**
\$ 725

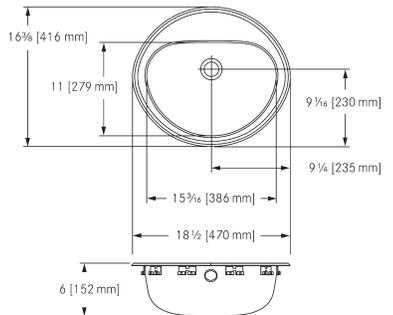


With ledge, 6" deep, no overflow
V1619-6-1 1 hole, centered
V1619-6-3 3 hole, 4" centerset
 Gauge 18
 Outside dimensions **16 3/8 x 18 1/2"**
 Inside bowl **11 x 15 3/16 x 6"**
 Mirror finished rim, #4 satin finished bowl
 Accepts 1 1/4" (32 mm) waste assembly, not
 included
 Waste location **Center back**
 Minimum cabinet size **24"**
\$ 720

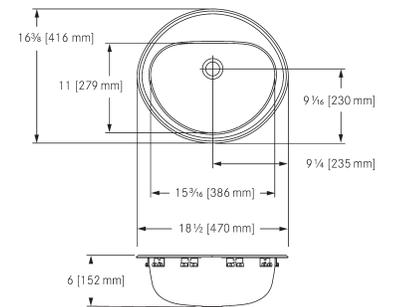


Vanity basin topmount with faucet ledge




With ledge, 5" deep, overflow
OV1821-5-1 1 hole, centered
OV1821-5-3 3 hole, 4" centerset
 Gauge 18
 Outside dimensions **18 x 21"**
 Inside bowl **11⁷/₁₆ x 18 x 5"**
 Mirror finished rim, #4 satin finished bowl
 Integral **overflow** at back of bowl
 Accepts 1¹/₄" (32 mm) overflow waste assembly,
 not included
 Waste location **Center back**
 Minimum cabinet size **24"**
\$ 765

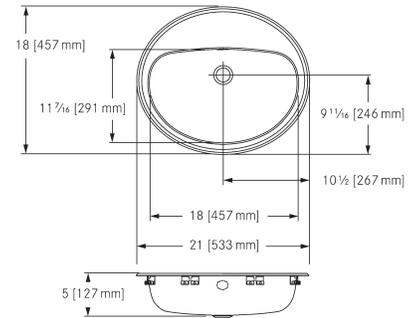


With ledge, 5" deep, no overflow
V1821-5-1 1 hole, centered
V1821-5-3 3 hole, 4" centerset
 Gauge 18
 Outside dimensions **18 x 21"**
 Inside bowl **11⁷/₁₆ x 18 x 5"**
 Mirror finished rim, #4 satin finished bowl
 Accepts 1¹/₄" (32 mm) waste assembly, not
 included
 Waste location **Center back**
 Minimum cabinet size **24"**
\$ 740

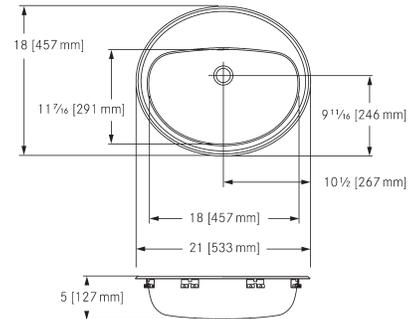

With ledge, 6" deep, overflow
OV1821-6-1 1 hole, centered
OV1821-6-3 3 hole, 4" centerset
 Gauge 18
 Outside dimensions **18 x 21"**
 Inside bowl **11⁷/₁₆ x 18 x 6"**
 Mirror finished rim, #4 satin finished bowl
 Integral **overflow** at back of bowl
 Accepts 1¹/₄" (32 mm) overflow waste assembly,
 not included
 Waste location **Center back**
 Minimum cabinet size **24"**
\$ 848

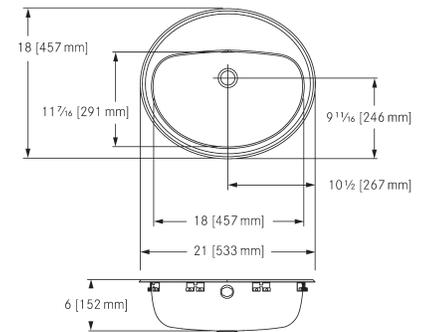



With ledge, 6" deep, no overflow
V1821-6-1 1 hole, centered
V1821-6-3 3 hole, 4" centerset
 Gauge 18
 Outside dimensions **18 x 21"**
 Inside bowl **11⁷/₁₆ x 18 x 6"**
 Mirror finished rim, #4 satin finished bowl
 Accepts 1¹/₄" (32 mm) waste assembly, not
 included
 Waste location **Center back**
 Minimum cabinet size **24"**
\$ 786

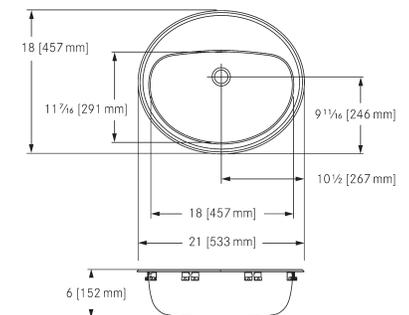

Vanity basin undermount




**Undermount, rectangular, no overflow
WB1119U-5**
Gauge **18**
Outside dimensions **11 x 19"**
Inside bowl **9 x 17 x 4 1/2"**
#4 satin finished bowl
Accepts 1 1/4" (32 mm) waste assembly, not included
Waste location **Center back**
Minimum cabinet size **24"**

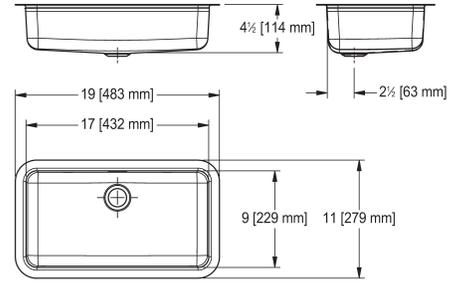

\$1,348





**Undermount, U-shaped, overflow
OWB1420U-5**
Gauge **18**
Outside dimensions **14 x 20"**
Inside bowl **12 x 18 x 4 1/2"**
#4 satin finished bowl
Integral **overflow** at back of bowl
Accepts 1 1/4" (32 mm) overflow waste assembly, not included
Waste location **Center back**
Minimum cabinet size **24"**

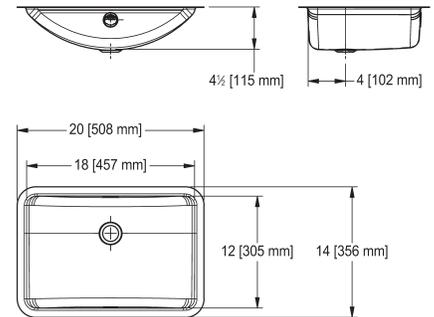

\$1,235



**Undermount, U-shaped, no overflow
WB1420U-5**
Gauge **18**
Outside dimensions **14 x 20"**
Inside bowl **12 x 18 x 4 1/2"**
#4 satin finished bowl
Accepts 1 1/4" (32 mm) waste assembly, not included
Waste location **Center back**
Minimum cabinet size **24"**

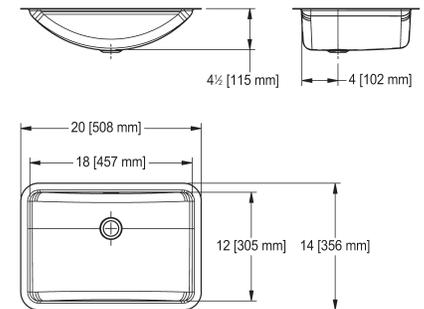

\$1,239

Vanity basin undermount



Undermount with overflow OV1317U-5

Gauge **18**

Outside dimensions **13 1/4 x 17 7/16"**

Inside bowl **10 15/16 x 15 3/16 x 5"**


#4 satin finished bowl

Integral **overflow** at back of bowl

Accepts 1 1/4" (32 mm) overflow waste
assembly, not included

Waste location **Center back**

Minimum cabinet size **24"**

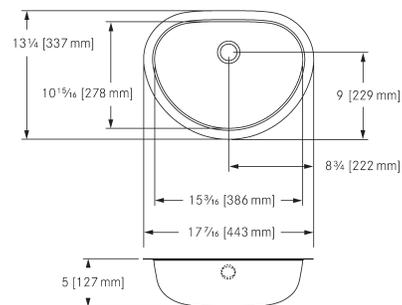

\$ 894



Undermount with overflow OV1420U-5

Gauge **18**

Outside dimensions **13 11/16 x 20 1/4"**

Inside bowl **11 7/16 x 18 x 5"**


#4 satin finished bowl

Integral **overflow** at back of bowl

Accepts 1 1/4" (32 mm) overflow waste
assembly, not included

Waste location **Center back**

Minimum cabinet size **24"**

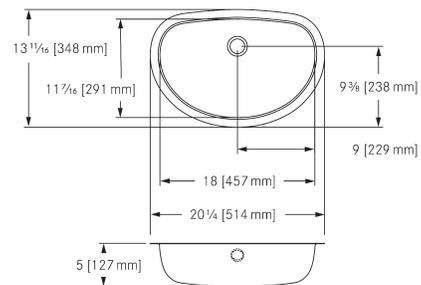

\$ 1,117



Healthcare



Pictured: HWSS2321W-00 Medi-flo sink

45	Medi-flo healthcare sink
46	Ozo-flo faucets
47	Medi-flo & Ozo-flo accessories
48	Nightingale hand hygiene sinks
50	Nightingale Elite hand hygiene sinks
51	Premium surgical scrub sinks
52	Classic surgical scrub sinks
53	Premium surgical scrub sinks bundles
54	Clinical wash basins
56	Dual mount healthcare sinks

Medi-flo hand hygiene sink with integrated spout

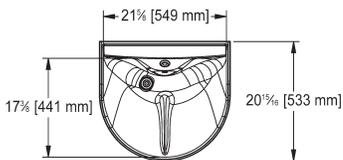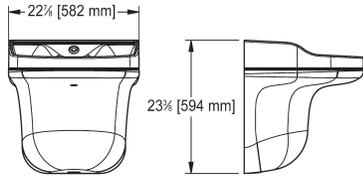

Patient room sink with integrated spout for infection control

HWSS2321W-00

Wall mount healthcare sink with laminar flow spout with integrated electrochemical water disinfection technology. White solid surface hand hygiene sink with removable shroud. Left rear 1 1/2" (DN 40) waste location to prevent water from splashing directly into the waste. An anti-splash feature runs through the center of the sink to greatly reduce splashing. Infrared controls trigger an illuminated laminar flow stream delivering water with dissolved ozone and other mixed oxidants on demand. Flow rate is 5.7 Lpm/1.5 gpm.

Recommended for areas with normal water conductivity above 75 TDS. If unaware of your local water conductivity, please contact customer service and this can easily be determined for you. Recommended water temperature is between 80-95°F (27-35°C). Hand hygiene sinks are specifically designed for hand washing only. They are not recommended as a drinking source, for washing utensils or for draining of medical bags or bedpans.

A plug-in transformer required for generation of mixed oxidants is included. Medi-flo is cUPC certified and is compliant with CSA B45.5-11/IAPMO Z124-2011 and IGC156-2012el. Meets and exceeds various national healthcare standards; ie, Z317/CSAZ8000. Wheelchair accessible: meets ADA, ANSI A117.1 and CSA B651-04. Patent Pending.

Optional: Pre-set thermostatic mixing valve **MEDI-MIX**.
Optional: In-wall carrier **IWC2104** for quicker installation.

\$ 4,224




Medi-flo splash reduction features

- Side splashes to prevent water from splashing out of the sink
- Laminar flow spout
- Infrared sensor turns water on when user places hands inside sink
- Center rib diverts water flow from faucet
- Integral waste, offset drain in rear left position

Laminar flow spout reduces splashing

Medi-flo delivers water in a laminar flow stream. Laminar flow occurs when water molecules move in an orderly, straight line for a turbulence-free stream.

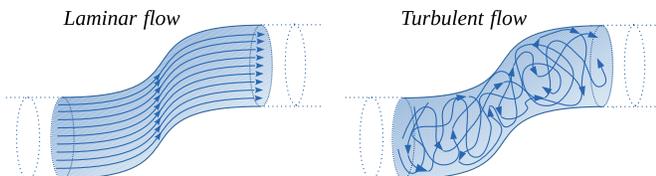

Efficacy of electrochemical water disinfection

Pathogen	Efficacy	Contact time	Source
Candida auris	99.9%	10 minutes	Cleveland VA Medical Center
C. difficile spores	64%	20 seconds	EMSL Canada Inc.
Klebsiella pneumoniae	99.99%	30 seconds	EMSL Canada Inc.
Legionella pneumophila	99.99%	5 minutes	EMSL Canada Inc.
MRSA	99.9%	10 minutes	Cleveland VA Medical Center
Pseudomonas	99.9%	10 minutes	Cleveland VA Medical Center

Time kill studies performed by 3rd party laboratories show that electrochemical water disinfection can be effective at reducing certain waterborne pathogens. These rates are attributed to electrochemical water disinfection, not a product performance claim.

Ozo-flo laminar flow healthcare faucets

Ozo-flo hands-free clinical faucets are ideal for new or retrofit applications where hand wash sinks can benefit from added infection control. The addition of ozone and other mixed oxidants to the water will help keep the sink and waste free of biofilms and bacteria. Faucets are fabricated from Type 316 stainless steel and feature a blue illumination ring indicating activation of ozonation cycle. Control features include a post-wash cycle of 3 seconds to wash soap residue and bacteria down the drain. A daily purge cycle prevents water from stagnating in the drain lines for continuous waste disinfection.




Ozo-flo touch free faucet, wall mount HWF05

Front to back **7 5/8"**
 Diameter **1 1/2"**
 Hands free operation
Laminar flow 5.7 Lpm/1.5 gpm
 Includes ozone generator unit with plug-in transformer.
 Requires thermostatic mixing valve, not included.
 Recommended: MEDI-MIX.
 Certified to ASME A112.18.1/B125.1, UL1951, UL979 for ozone features, and CSA C22.2, Numbers 68 and 14.



\$ 3,456

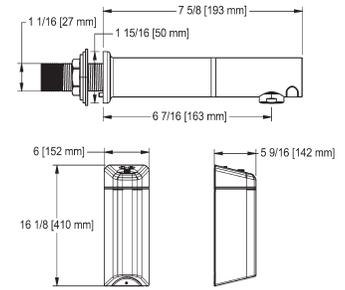


Ozo-flo touch free faucet, deck mount, angled HWF23

Front to back **6 11/16"**
 Height **5 13/16"**
Laminar flow 5.7 Lpm/1.5 gpm
 Includes ozone generator unit with plug-in transformer.
 Requires thermostatic mixing valve, not included.
 Recommended: MEDI-MIX.
 Certified to ASME A112.18.1/B125.1, UL1951, UL979 for ozone features, and CSA C22.2, Numbers 68 and 14.



\$ 3,493

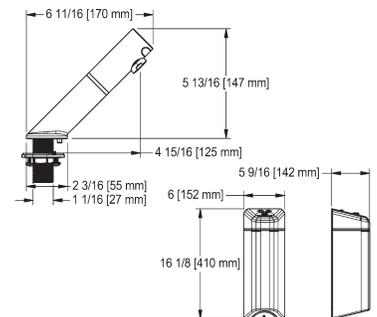


Ozo-flo touch free faucet, deck mount, high neck angled HWF43

Front to back **8 7/8"**
 Height **10 3/16"**
Laminar flow 5.7 Lpm/1.5 gpm
 Includes ozone generator unit with plug-in transformer.
 Requires thermostatic mixing valve, not included.
 Recommended: MEDI-MIX.
 Certified to ASME A112.18.1/B125.1, UL1951, UL979 for ozone features, and CSA C22.2, Numbers 68 and 14.



\$ 3,681

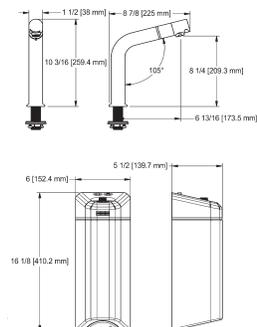

Accessories for Medi-flo & Ozo-flo



Mixing valve

MEDI-MIX

Optional thermostatic mixing valve pre-programmed for Medi-flo HWSS2321W-00 sink and Ozo-flo faucets HWF05, HWF23, and HWF43. Adjustable outlet temperature range: 95 – 118°F (35 – 48°C). Factory set temperature 95°F (40°C).

\$ 258



Replacement shroud for Medi-flo

MEDI-SHR

Removable replacement shroud for HWSS2321W-00 Medi-flo sink. White polymer composite material.

\$ 348



In-wall carrier for Medi-flo & Nightingale Elite

IWC2104


Floor mounted in-wall carrier designed for Medi-flo (HWSS2321W-00) sink and the new Nightingale Elite sinks (AHWSS2321WDM).

Preset stud locations simplify installation.

Steel uprights with welded feet.

Integrated rough in box. Hardware included.

\$ 370

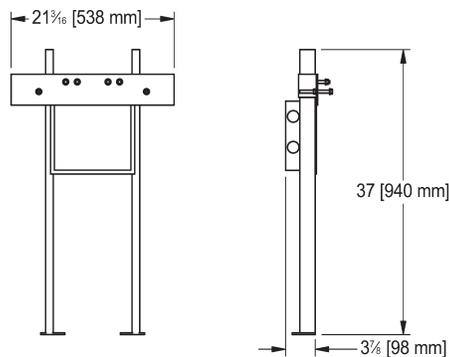

Nightingale Sinks



Pictured: AHWSS1720W-G Nightingale sink with faucet



Hand hygiene sink AHWSS1720W-00

White solid surface hand hygiene sink with removable shroud. Sink is made of non-porous cast material with antimicrobial resin. An anti-splash feature runs through the center of the sink to greatly reduce splashing. Bowl is sloped towards drain and the sink rim is shaped to prevent users from placing objects on it. Hand hygiene sinks are specifically designed for hand washing only. Accepts single hole faucets with lower mounting hardware less than 2 1/2" (63 mm) in diameter.




Left rear 1 1/2" (DN 40) waste location, supplied with waste assembly. Sink is cUPC certified and compliant with CSA B45.5-11/IAPMO Z124-2011. Meets and exceeds various national healthcare standards; ie, CSAZ8000, CSAZ317.1-16. Wheelchair accessible: meets ADA, ANSI A117.1 and CSA B651-04 (check local codes to ensure compliance).

Outside dimensions **16 15/16 x 20 1/8 x 21 1/2"**

Inside bowl **15 1/4 x 18 5/8 x 9"**

Waste location **Left Rear**

\$1,780



Optional Accessories

IWC2203

In-wall carrier

See details on p. 55



Nightingale hand hygiene sinks



Hand hygiene sink with hands-free gooseneck faucet AHWSS1720W-G

White solid surface hand hygiene sink with removable shroud. Sink is made of non-porous cast material with antimicrobial resin. An anti-splash feature runs through the center of the sink to greatly reduce splashing. Bowl is sloped towards drain and the sink rim is shaped to prevent users from placing objects on it. Hand hygiene sinks are specifically designed for hand washing only.

Left rear 1 1/2" (DN 40) waste location, supplied with waste assembly.

Hands free gooseneck **faucet** included. Faucet can be powered with included plug in transformer or with included battery pack which will last approximately 100,000 cycles on 4 x AA batteries (AC or DC or AC with battery backup). Flow rate 6 Lpm (1.5gpm) laminar flow.

Faucet is certified to ASME A112.18.1/CSA B125.1.


Sink is cUPC certified and compliant with CSA B45.5-11/IAPMO Z124-2011. Meets and exceeds various national healthcare standards; ie, CSAZ8000, CSAZ317.1-16.

Wheelchair accessible: meets ADA, ANSI A117.1 and CSA B651-04 (check local codes to ensure compliance).

Outside dimensions **16 15/16 x 20 1/8 x 30 3/8"**

Inside bowl **15 1/4 x 18 5/8 x 9"**

Waste location **Left Rear**

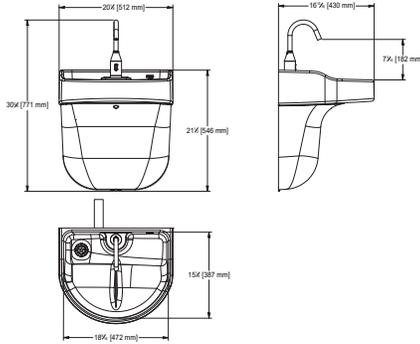

\$1,956

Optional Accessories

IWC2203

In-wall carrier

See details on p. 55



27811170

Hardwire kit

See details on p. 68



Nightingale Elite hand hygiene sinks



Hand hygiene sink AHWSS2321WDM-00

White solid surface hand hygiene sink with removable shroud. Sink is made of non-porous cast material with antimicrobial resin.

An anti-splash feature runs through the center of the sink to greatly reduce splashing. Bowl is sloped towards drain and the sink rim is shaped to prevent users from placing objects on it. Hand hygiene sinks are specifically designed for hand washing only.

Accepts single hole faucets with lower mounting hardware less than 2 1/2" (63 mm) in diameter.

Left rear 1 1/2" (DN 40) waste location, supplied with waste assembly.

Sink is cUPC certified and compliant with CSA B45.5-11/IAPMO Z124-2011. Meets and exceeds various national healthcare standards; ie, CSAZ8000, CSAZ317.1-16.


Wheelchair accessible: meets ADA, ANSI A117.1 and CSA B651-04 (check local codes to ensure compliance).

Outside dimensions **20 15/16 x 22 7/8 x 23 3/8"**

Inside bowl **17 9/16 x 21 5/8 x 9"**

Waste location **Left Rear**

\$2,153

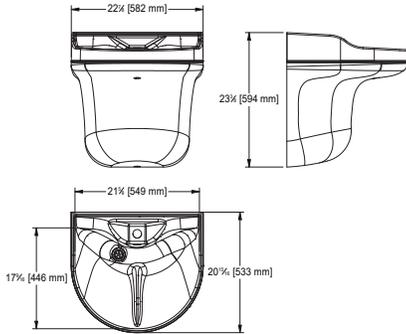

Optional Accessories

IWC2104

In-wall carrier

See details on p. 47



Hand hygiene sink with hands-free gooseneck faucet AHWSS2321WDM-G

White solid surface hand hygiene sink with removable shroud. Sink is made of non-porous cast material with antimicrobial resin. An anti-splash feature runs through the center of the sink to greatly reduce splashing. Bowl is sloped towards drain and the sink rim is shaped to prevent users from placing objects on it. Hand hygiene sinks are specifically designed for hand washing only.

Left rear 1 1/2" (DN 40) waste location, supplied with waste assembly.

Hands free gooseneck **faucet** included. Faucet can be powered with included plug in transformer or with included battery pack which will last approximately 100,000 cycles on 4 x AA batteries (AC or DC or AC with battery backup). Flow rate 6 Lpm (1.5gpm) laminar flow.

Faucet is certified to ASME A112.18.1/CSA B125.1.

Sink is cUPC certified and compliant with CSA B45.5-11/IAPMO Z124-2011. Meets and exceeds various national healthcare standards; ie, CSAZ8000, CSAZ317.1-16.


Wheelchair accessible: meets ADA, ANSI A117.1 and CSA B651-04 (check local codes to ensure compliance).

Outside dimensions **20 15/16 x 22 7/8 x 31 3/8"**

Inside bowl **17 9/16 x 21 5/8 x 9"**

Waste location **Left Rear**

\$2,445

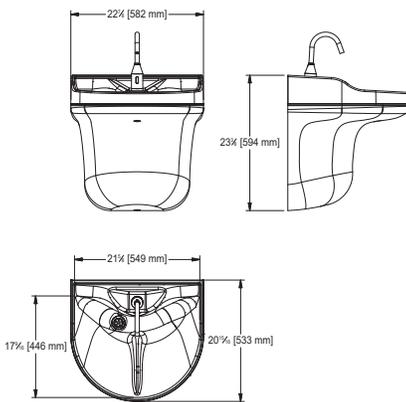

Optional Accessories

IWC2104

In-wall carrier

See details on p. 47

27811170

Hardwire kit

See details on p. 68



Premium surgical scrub units



Premium surgical scrub sink, 16" wide SSU1-2016-3

16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Radius covered bowl corners. Access panel for service and maintenance. Integral 1 1/2" (38 mm) waste with threaded tailpiece for use with McGuire 155WC tailpiece.


Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **19 3/4 x 16 x 28"**

Inside bowl **15 x 13 x 10"**

Waste location **Center**

\$ 9,868

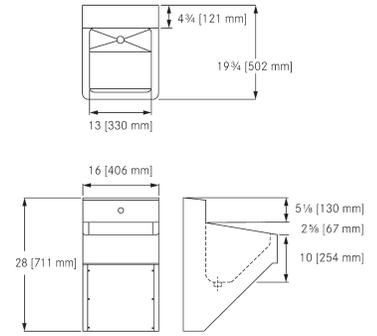

Premium surgical scrub sink, 20" wide SSU1-2020-3

16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Radius covered bowl corners. Access panel for service and maintenance. Integral 1 1/2" (38 mm) waste with threaded tailpiece for use with McGuire 155WC tailpiece.


Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **19 3/4 x 20 x 28"**

Inside bowl **15 x 17 x 10"**

Waste location **Center**

\$ 10,150

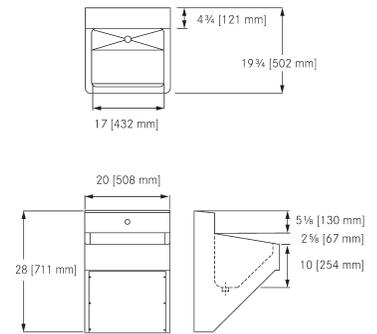

Premium surgical scrub sink, 40" wide SSU2-2040-3

16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Radius covered bowl corners. Divider is removable for thorough cleaning. Access panel for service and maintenance. Integral 1 1/2" (38 mm) waste with threaded tailpiece for use with McGuire 155WC tailpiece.


Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **19 3/4 x 40 x 28"**

Inside bowl **15 x 18 7/16 x 10"**

Waste location **Center**

\$ 13,816

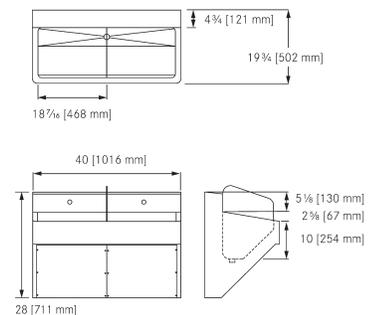


Classic surgical scrub sinks



Classic scrub sink, single SSU1-00

Single compartment surgical scrub station. 16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Bowl slopes from 10" to 12" from right to left. Access panel for service and maintenance. Franke hygienic 1 1/2" (38 mm) offset waste with integral tailpiece (no separate waste fitting required). Supplied with wall hanger brackets. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **23 x 30 x 26"**
Inside bowl **17 1/2 x 27 x 12"**
Waste location **Left Back**

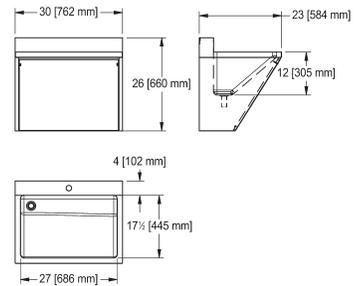


\$ 6,707



Classic scrub sink, double SSU2-00

Double compartment surgical scrub station. 16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Bowl slopes from 12" to 14" from right to left. Removable divider with no tracks in bowl. Access panel for service and maintenance. Franke hygienic 1 1/2" (38 mm) offset wastes with integral tailpieces (no separate waste fittings required). Supplied with wall hanger brackets. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **23 x 60 x 26"**
Inside bowl **17 1/2 x 57 x 14"**
Waste locations **Left and Center**

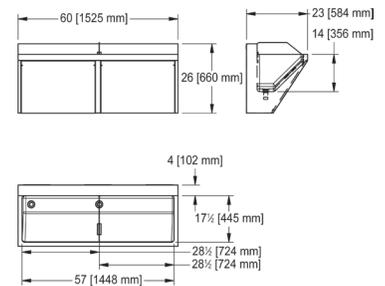


\$ 7,802



Classic scrub sink, triple SSU3-00

Triple compartment surgical scrub station. 16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Bowl slopes from 10" to 14" from right to left. Removable dividers with no tracks in bowl. Access panel for service and maintenance. Franke hygienic 1 1/2" (38 mm) offset wastes with integral tailpieces (no separate waste fittings required). Supplied with wall hanger brackets. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **23 x 90 x 26"**
Inside bowl **17 1/2 x 87 x 14"**
Waste location **Left, Center and Center**

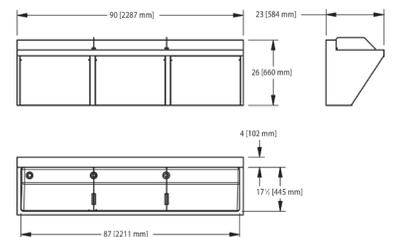

\$ 16,352

Classic surgical scrub sink bundles with valves and hands-free faucets



Classic scrub sink bundle, single SSU1-10

Single compartment surgical scrub station. 16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Bowl slopes from 10" to 12" from right to left. Access panel for service and maintenance. Franke hygienic 1 1/2" (38 mm) offset waste with integral tailpiece (no separate waste fitting required). Supplied with wall hanger brackets. Certified to ASME A112.19.3/CSA B45.4.


Outside dimensions **23 x 30 x 26"**

Inside bowl **17 1/2 x 27 x 12"**

Waste location **Left Back**

Sink bundle includes:

- 1 - **MIX-LF** thermostatic mixing valve
- 1 - **HHF180-6L** gooseneck hands-free faucet

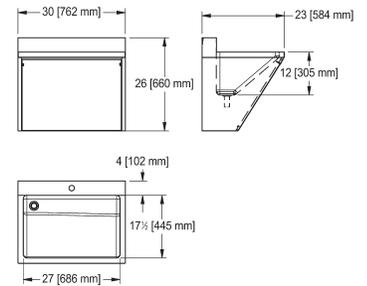

\$ 7,788



Classic scrub sink bundle, double SSU2-10

Double compartment surgical scrub station. 16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Bowl slopes from 12" to 14" from right to left. Removable divider with no tracks in bowl. Access panel for service and maintenance.

Franke hygienic 1 1/2" (38 mm) offset wastes with integral tailpieces (no separate waste fittings required). Supplied with wall hanger brackets. Certified to ASME A112.19.3/CSA B45.4.


Outside dimensions **23 x 60 x 26"**

Inside bowl **17 1/2 x 57 x 14"**

Waste locations **Left and Center**

Sink bundle includes:

- 2 - **MIX-LF** thermostatic mixing valves
- 2 - **HHF180-6L** gooseneck hands-free faucets

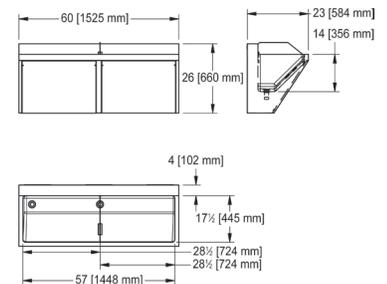

\$ 9,976



Classic scrub sink bundle, triple SSU3-10

Triple compartment surgical scrub station. 16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Bowl slopes from 10" to 14" from right to left. Removable dividers with no tracks in bowl. Access panel for service and maintenance.

Franke hygienic 1 1/2" (38 mm) offset wastes with integral tailpieces (no separate waste fittings required). Supplied with wall hanger brackets. Certified to ASME A112.19.3/CSA B45.4.


Outside dimensions **23 x 90 x 26"**

Inside bowl **17 1/2 x 87 x 14"**

Waste location **Left, Center and Center**

Sink bundle includes:

- 3 - **MIX-LF** thermostatic mixing valves
- 3 - **HHF180-6L** gooseneck hands-free faucets

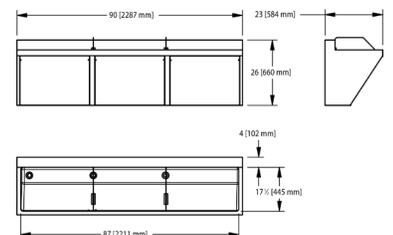

\$ 19,146

Clinical Wash Basins




Clinical wash basin, for splash mount faucet HWSS1518P-00

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Constructed with an integral shroud. High back and side walls contain splashing and protect adjacent surfaces from contamination. Integral 1 1/2" (38 mm) waste welded to bottom of the sink bowl. Waste is left open and shaped to prevent the insertion of plugs or strainers to comply with national healthcare guidelines. This fixture has antimicrobial nanocoating product protection on all exposed surfaces of the sink. Recommended splash mount faucet **HHF180-6L-W**. Certified to ASME A112.19.3/CSA B45.4. Z8000 compliant.

Outside dimensions **18 x 15 x 28 5/8"**
 Inside bowl **14 x 14 x 10"**
 Waste location **Right Back**

\$ 2,254

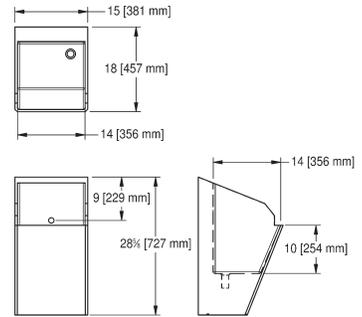


Clinical wash basin, dual mount faucet options HWS1414P-00

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Constructed with an integral shroud. High back and side walls contain splashing and protect adjacent surfaces from contamination. Integral 1 1/2" (38 mm) waste welded to bottom of the sink bowl. Waste is left open and shaped to prevent the insertion of plugs or strainers to comply with national healthcare guidelines. This fixture is coated with antimicrobial product protection on all exposed surfaces of the sink. Recommended deck mount faucet **HHF180-6L**. Certified to ASME A112.19.3/CSA B45.4. Z8000 compliant.

Outside dimensions **18 3/4 x 15 x 18 1/2"**
 Inside bowl **14 x 14 x 10"**
 Waste locations **Left Back**


\$ 2,393

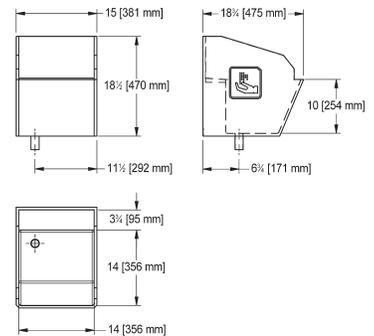

Shroud for HWS1414P-00 & HWSS1518P-00 HWS-RS-00

Stainless steel removable shroud for HWS1414P-00 and HWSS1518P-00 clinical wash basins. Overall dimensions **13 1/2 x 14 1/2 x 10"**

\$ 373

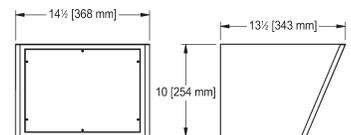

Clinical Wash Basins



Clinical wash basin, large back splash HWS1420P-00


18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Offset waste with open access to allow for easy cleaning of P-Trap. Integral 1 1/2" (38 mm) waste welded to bottom of the sink bowl.

This fixture is coated with antimicrobial product protection on all exposed surfaces of the sink. Recommended deck mount faucet **HHF180-6L**. Certified to ASME A112.19.3/CSA B45.4. Z8000 compliant.

Outside dimensions **19 3/16" x 21" x 37 15/16"**

Inside bowl **14" x 20" x 10"**

Waste location **Left Back**

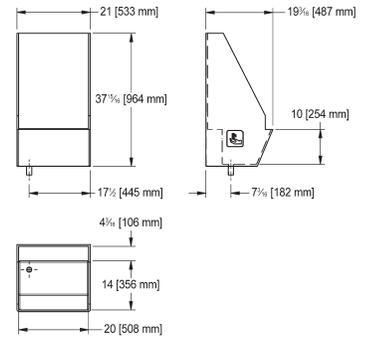

\$ 3,782



Clinical wash basin, wheelchair accessible AWHB1414P-3


18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Offset waste with open access to allow for easy cleaning of P-Trap. Integral 1 1/2" (38 mm) waste welded to bottom of the sink bowl.

Wheelchair accessible: meets ADA, ANSI A117.1. Certified to ASME A112.19.3/CSA B45.4. Z8000 compliant.

Outside dimensions **17 9/16" x 14 5/16" x 15 1/16"**

Inside bowl **14 3/8" x 14" x 9 1/16"**

Waste location **Left Back**

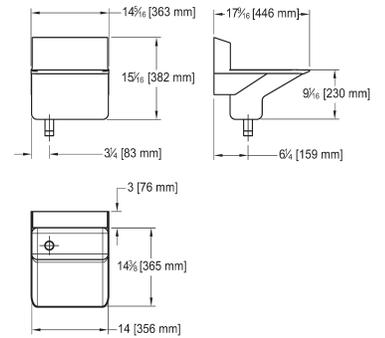

\$ 6,760




In-wall carrier for wall hung basins IWC2203

Universal floor mounted in-wall carrier designed for wall hung basins and water coolers. Steel uprights with welded feet. Includes lower bracket for added support. Mounting hardware included.

Outside dimensions **7 7/16" x 23 7/8" x 42"**

\$ 370

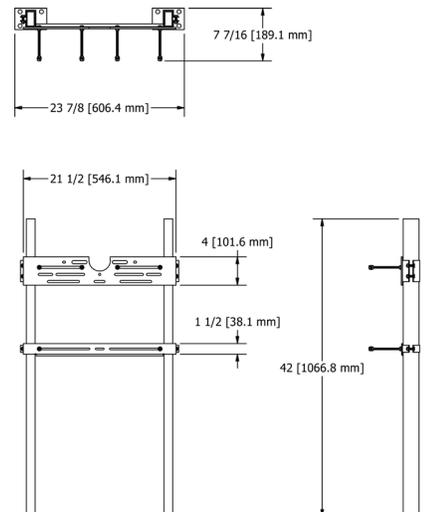

Dual mount medical hand wash sinks




Topmount or undermount single bowl medical hand wash sink HWS0610P-3

Single compartment self rimming topmount (or undermount) medical hand wash sink with faucet ledge. 18 gauge (1.2 mm), type 304 stainless steel. Sink compartment is angled to reduce splashing and waste is offset to reduce the risk of any bacteria contamination and splashing. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, sound deadening pads, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4. Includes 1 1/2" (38 mm) duplex waste assembly and 1 1/2" (DN38) tailpiece.

Custom, non-returnable
Outside dimensions **12 1/8 x 18 3/16"**
Inside bowl **10 x 16 x 10"**
Waste location **Right rear**

\$ 802

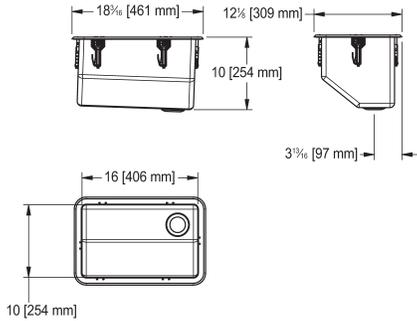


Topmount or undermount single bowl medical hand wash sink with faucet ledge HWS6810P-3

Single compartment self rimming topmount (or undermount) medical hand wash sink with faucet ledge. 18 gauge (1.2 mm), type 304 stainless steel. Sink compartment is angled to reduce splashing and waste is offset to reduce the risk of any bacteria contamination and splashing. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, sound deadening pads, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3/CSA B45.4.

Includes 1 1/2" (38 mm) duplex waste assembly and 1 1/2" (DN38) tailpiece.
Custom, non-returnable.

Outside dimensions **21 1/2 x 20"**
Inside bowl **16 x 18 x 10"**
Waste location **Right rear**

\$ 1,073

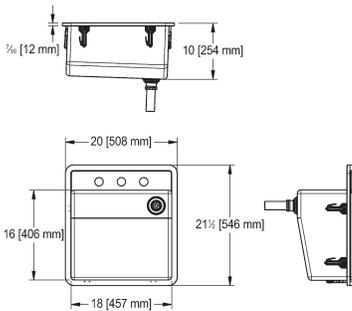


Hand Wash Basins



Pictured: AWHBS2419-7 basins with HHF23T faucets

Designer, semi-public hand wash basins

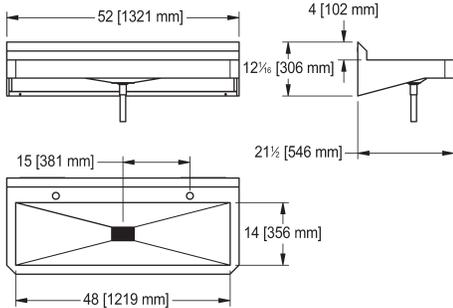

Designer double hand wash basin WHB5222-7

Designer wall hung basin. 16 gauge (1.8 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are polished to a #4 satin finish. Includes 1 1/4" (DN 32) waste fitting included. Features a vandal-resistant laser cut pyramid waste cover. Unit is installed using supplied wall brackets. Optional wall carrier IWC2203 is available. Certified to ASME A112.19.3/CSA B45.4.

Optional shroud WHB5222-RS

Wheelchair accessible: meets ADA (Americans with disabilities act guidelines), ANSI A117.1 (Accessible and usable buildings and facilities), and CSA B651-04. Check local codes to ensure compliance.

Outside dimensions **21 1/2 x 52 x 12 1/16"**

Inside bowl **21 1/2 x 48 x 5"**

Waste location **Center**



\$ 3,378

Removable shroud for WHB5222-7 WHB5222-RS

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Satin finish. Shroud extends 20 9/16" below the bottom of the basin.

Outside dimensions **21 5/16 x 7 x 20 5/8"**

\$ 296

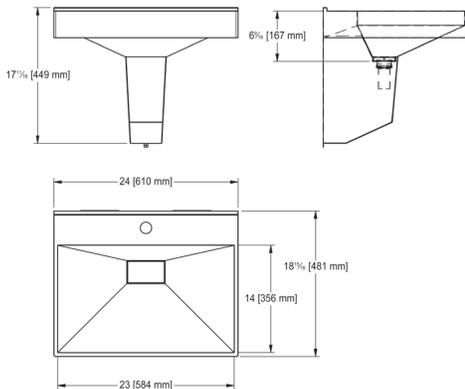

Cleopatra single bowl hand wash basin AWHBS2419-7

Designer wall hung basin. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are polished to a #4 satin finish. Basin features vandal-resistant waste cover attached via concealed cable. Integral grid waste opening and threaded connection underneath to accept a 1 1/2" tailpiece (included). Separate waste fitting not required.

Basin is installed using supplied wall brackets, recommended in-wall carrier IWC2203 sold separately.

Certified to ASME A112.19.3/CSA B45.4. Wheelchair accessible: meets ADA (Americans with Disabilities Act) guidelines, ANSI A117.1 (Accessible and usable buildings and facilities), and CSA B651-04 (Accessible design for the built environment). Check local codes to ensure compliance.

Outside dimensions **18 15/16 x 24 x 17 11/16"**

Inside bowl **16 x 14 x 6 9/16"**

Waste location **Center back**

\$ 1,769


Optional wall carrier

IWC2203

In-wall carrier

See details on p. 55





**Wheelchair accessible wall hung basin
AWHB220W-3-1**

Single wash basin made from a unique Franke resin-bonded solid surface material with pore-free, smooth UV resistant gelcoat with high-polish surface. Shallow basin featuring a splash reduction rib. 1 1/2" grid waste included. Unit is installed using supplied wall hanger brackets.

Optional in-wall carrier IWC2203 is available.

cUPC certified and compliant with CSA B45.5- 11/IAPMO Z124-2011.

Wheelchair accessible: meets ADA (Americans with Disabilities Act), ANSI A117.1 (Accessible and usable buildings and facilities) and CSA B651-04 (check local codes to ensure compliance).

Outside dimensions **18 15/16 x 24 x 17 11/16"**

Inside bowl **16 x 14 x 6 9/16"**

Waste location **Center back**

\$1,488

Optional wall carrier

IWC2203

In-wall carrier

See details on p. 55




Designer, semi-public hand wash basins



Designer hand wash basin, no overflow WHB2221-7

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finish. Designed for either new installation or replacement/retrofit onto select vitreous china wall carriers. Edge is formed as an anti-spill rim. Includes one piece wall hanger bracket. 1 1/4" (32 mm) grid strainer waste kit included. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **20^{15/16} x 21 1/2 x 11 1/4"** Inside bowl **13 x 14 1/2 x 5"** Waste location **Center back** Overflow **No**


\$ 2,133

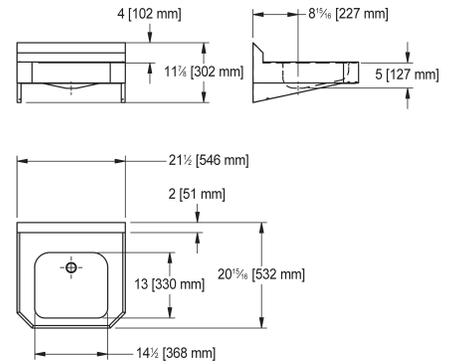

Designer hand wash basin, with overflow WHB2221-8

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finish. Designed for either new installation or replacement/retrofit onto select vitreous china wall carriers. Edge is formed as an anti-spill rim. Includes one piece wall hanger bracket. Accepts 1 1/4" (32 mm) waste kit with overflow (not included). Order model #3700. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **20^{15/16} x 21 1/2 x 11 1/4"** Inside bowl **13 x 14 1/2 x 5"** Waste location **Center back** Overflow **Yes**


\$ 2,279

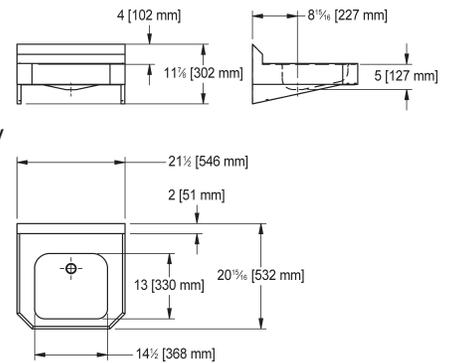

Removable shroud for WHB2221 basins WHB2221-RS

Gauge 18
Satin finish Stainless Steel
Outside dimensions **11 1/4 x 8 x 14 7/8"**

\$ 312

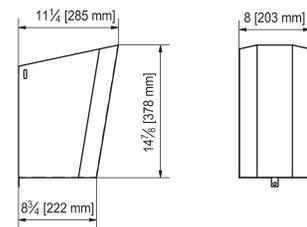

Cover plate for WHB2221-RS shroud WHB2221-UC

Bottom cover plate for WHB2221-RS shroud prevents unwanted access to plumbing fixtures. Overall dimensions **21 x 21"**

\$ 313



Designer, semi-public hand wash basins





Designer basin WT400C-7

Designer single wash basin for wall mounting. 19 gauge (1.0 mm) seamless welded bowl. Front panel has 45° corner edges.

Exposed surfaces are polished to a satin finish. Accepts 1 1/4" (32 mm) waste kit, not included. Basin is installed using prewelded mounting brackets. Optional shroud **WT-RS** available. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **17 13/16 x 15 3/4"** Inside bowl **12 x 13 3/8 x 5 9/16"** Waste location **Center back**

\$ 1,078





Corner wall mount hand wash basin WT310E-7

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel.

Exposed surfaces are brushed finish. Includes installation kit. Accepts 1 1/4" (32 mm) waste kit, not included. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **12 3/16 x 12 3/16"** Inside bowl **6 1/8 x 11 7/16 x 4 3/4"** Waste location **Center**

\$ 822





Designer basin WT500C-7

Designer single wash basin for wall mounting. 19 gauge (1.0 mm) seamless welded bowl. Front panel has 45° corner edges.

Exposed surfaces are polished to a satin finish. Accepts 1 1/4" (32 mm) waste kit, not included. Basin is installed using prewelded mounting brackets.

Optional shroud **WT-RS** available. Certified to ASME A112.19.3/CSA B45.4. Outside dimensions **17 9/16 x 19 11/16"** Inside bowl **11 7/16 x 15 3/4 x 5 9/16"** Waste location **Center back**

\$ 1,209





Designer, semi-public hand wash basins




Designer basin WT600C-7

Designer single wash basin for wall mounting.
19 gauge (1.0 mm) seamless welded bowl.
Front panel has 45° corner edges.
Exposed surfaces are polished to a satin finish.
Accepts 1 1/4" (32 mm) waste kit, not included.
Basin is installed using prewelded mounting brackets.
Wheelchair accessible.
Optional shroud **WT-RS** available.
Certified to ASME A112.19.3/CSA B45.4.
Outside dimensions **18 7/8 x 23 5/8"**
Inside bowl **13 3/8 x 21 1/4 x 5 3/4"**
Waste location **Center back**

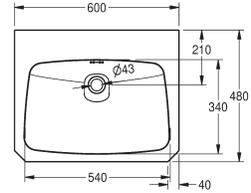


\$1,307

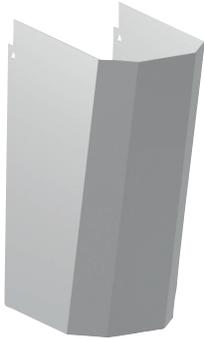

Shroud for WT400C/WT500C/WT600C basins WT-RS

Trap cover manufactured from 18 gauge, type 304 stainless steel. Exposed surfaces are satin finished. For wall mount installation of wash basin models WT400C, WT500C, WT600C and WHB1617 series.
Outside dimensions **10 1/2 x 6 1/2 x 15 3/4"**

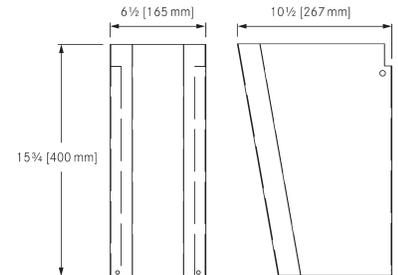


\$735

Hand wash basins, institutional



For wall mount faucet, 6" deep WHB1616-3

Gauge **18**
Outside dimensions **16 1/4 x 17"**
Inside bowl **12 x 14 x 6"**
#4 satin finish
Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper.
One piece wall hanger included, separate sink carrier not required.
Optional shroud **WT-RS** sold separately
Waste location **Center back**

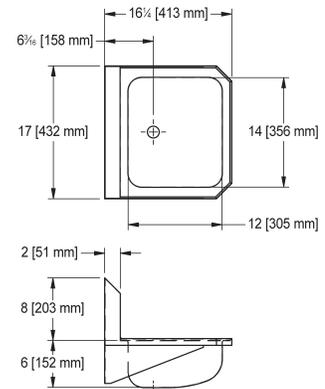

\$992

Hand wash basins, institutional



Wall hung basin, 1 1/2" waste WHB1617-3

Gauge 18

Outside dimensions 17 x 16 1/2"

Inside bowl 12 x 14 x 6"

#4 satin finish


Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper.

One piece wall hanger included, separate sink carrier not required.

Optional shroud **WT-RS** sold separately

Waste location **Center back**

\$ 991

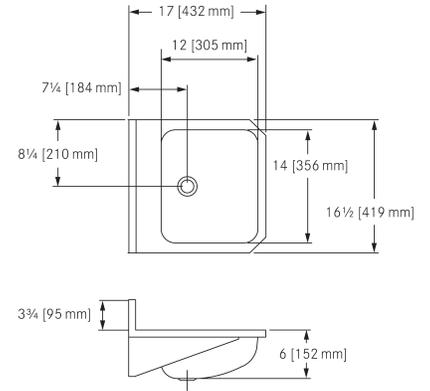

Wall hung basin, 1 1/4" waste WHB1617-7

Gauge 18

Outside dimensions 17 x 16 1/2"

Inside bowl 12 x 14 x 6"


#4 satin finish

Accepts 1 1/4" (32 mm) waste assembly, not included.

Optional shroud **WT-RS** sold separately

Waste location **Center back**

\$ 914

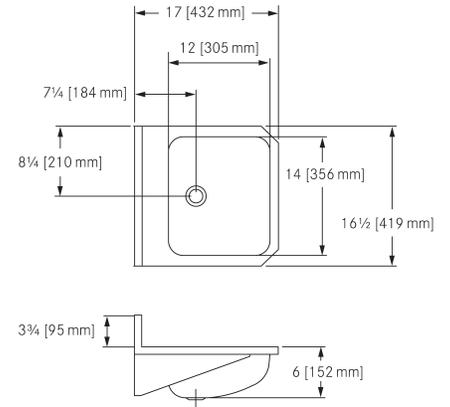

Hand wash basins, institutional



Wall hung basin, 1 1/2" waste WHB1819-3

Wash basin for wall mounting. 18 gauge (1.2 mm) stainless steel. Exposed surfaces are polished to a #4 satin finish.

Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper.

16 gauge side wall brackets and one piece wall hanger. Separate sink carrier is not required.


Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **19 x 18 1/2"**

Inside bowl **14 x 16 x 7"**

Waste location **Center**

\$ 980

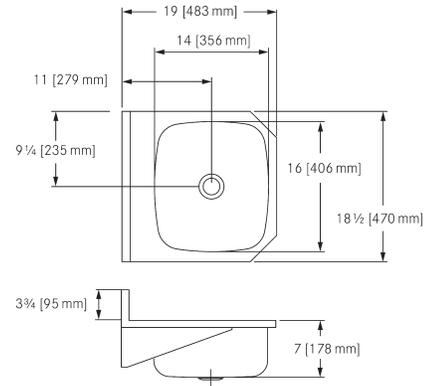

Wall hung basin, 1 1/4" waste WHB1819-7

Wash basin for wall mounting. 18 gauge (1.2 mm) stainless steel. Exposed surfaces are polished to a #4 satin finish.

Accepts 1 1/4" (32 mm) waste assembly, not included.

16 gauge side wall brackets and one piece wall hanger. Separate sink carrier is not required.


Certified to ASME A112.19.3-2008 / CSA B45.4-08

Outside dimensions **19 x 18 1/2"**

Inside bowl **14 x 16 x 7"**

Waste location **Center**

\$ 918

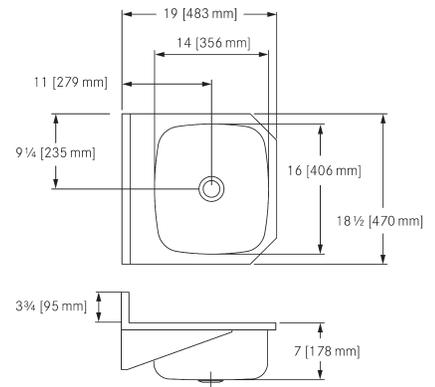

Hand wash basin with side side splashes WHB1716SPL-3

20 gauge (0.9 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finish.

Radius coved bowl corners.

Includes one piece wall hanger bracket.

Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper.


Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **15 1/2 x 16 3/4 x 13"**

Inside bowl **9 1/4 x 12 x 6"**

Waste location **Center**

\$ 1,027

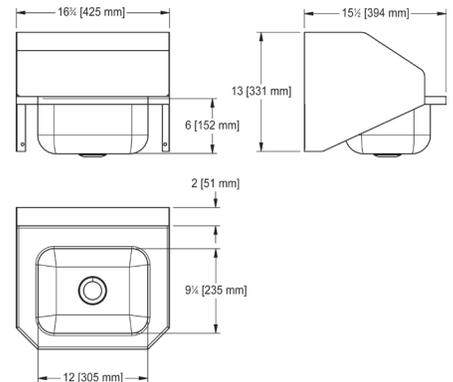

Hand wash basins, institutional



Hand wash basin, 20 gauge WHB1716-3

20 gauge (0.9 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finish.

Radius coved bowl corners.

Includes one piece wall hanger bracket.

Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper.



Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **15 1/2 x 16 3/4 x 12 3/4"**

Inside bowl **9 1/4 x 12 x 6"**

Waste location **Center**

\$ 983

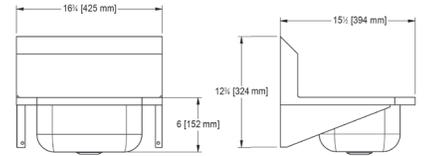

Hand wash basin with shroud WHBS181910-3

18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finish.

Includes one piece wall hanger bracket. Separate sink carrier not required.

Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper.



Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **19 x 16 x 14 1/2"**

Inside bowl **14 x 16 x 10"**

Waste location **Center**

\$ 3,871

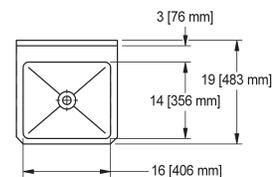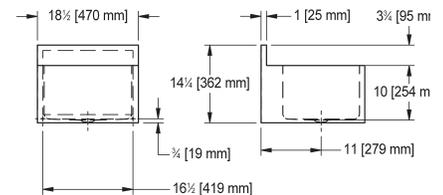

Wall service sink, 14 gauge WSS6713

14 gauge (2.0 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finish.

Radius coved bowl corners.

Includes 3 1/2" (89 mm) crumb cup strainer waste kit with 1 1/2" stainless steel tailpiece.



Certified to ASME A112.19.3/CSA B45.4.

Outside dimensions **19 x 20 x 25"**

Inside bowl **16 x 17 x 13"**

Waste location **Center**

\$ 6,245

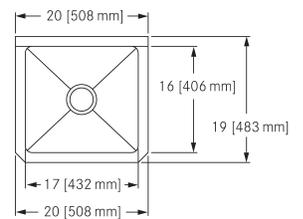


Washroom Accessories



67	Faucets
69	Washroom accessories
70	Aqua-foam soap dispensers
71	Multi-feed soap dispensers

Faucets




Aquarius wall mount AC powered faucet AT02-005AC

Polished finish, regular flow 5 Lpm/ 1.3 gpm

Type 316 stainless steel hands-free faucet. Wall mount installation, high polish finish. AC plug-in power option.

Highly intelligent electronic controls with programmable sensor ranges, run times, and automatic purging to eliminate stagnant water. Certified to ASME A112.18.1 / CSA B125.1
Faucet dimensions $1\frac{1}{2} \times 5\frac{7}{8}$ "

\$ 1,298

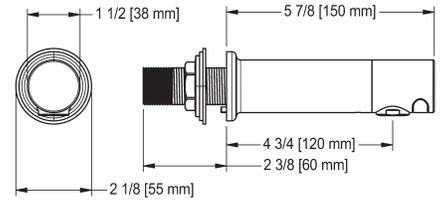


Aquarius wall mount DC powered faucet AT02-005DC

Polished finish, regular flow 5 Lpm/ 1.3 gpm

Type 316 stainless steel hands-free faucet. Wall mount installation, high polish finish. DC battery power option.

Highly intelligent electronic controls with programmable sensor ranges, run times, and automatic purging to eliminate stagnant water. Certified to ASME A112.18.1 / CSA B125.1
Faucet dimensions $1\frac{1}{2} \times 5\frac{7}{8}$ "

\$ 1,352

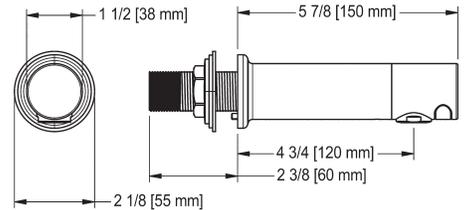

cUPC®

Mixing valve MIX-LF

Thermostatic mixing valve for use with Franke faucets.

\$ 258

Faucets




Electronic faucet, temperature adjust handle HHF23T

Hands free faucet for deck mounting with IR sensor near faucet base. 5.7 Lpm/ 1.5 gpm flow rate. Flat stop style with temperature adjust handle on side. Chrome finish. Battery operated (DC) or plug in (AC) with battery backup. The battery life is around 100,000 cycles if running on battery only. Certified to ASME A112.18.1 / CSA B125.1

Faucet dimensions **1 5/8 x 7 x 5 7/8"**

\$ 775

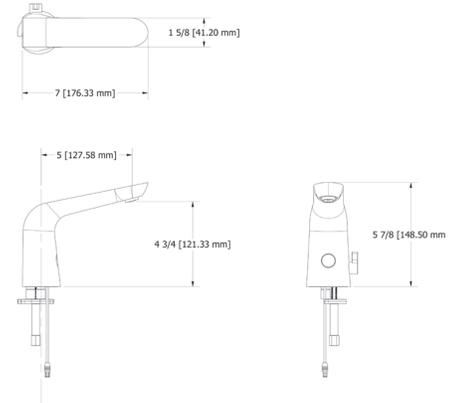


Laminar flow deck mount faucet HHF180-6L

Hands free faucet for deck mounting with IR sensor. Open spout, free of flow control or aerators. Chrome finish. 6.0 Lpm/ 1.5 gpm laminar flow rate. Supplied 6VDC plug in transformer included. Easy topmount installation. Automatic anti-vandal timeout. Certified to ASME A112.18.1 / CSA B125.

Overall dimensions **2 x 5 1/4 x 10 1/4"**

\$ 780

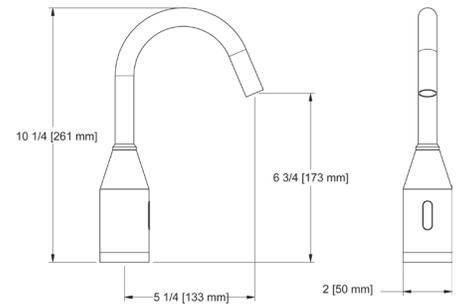


Laminar flow wall mount faucet HHF180-6L-W

Hands free faucet for wall mounting with IR sensor. Open spout, free of flow control or aerators. Chrome finish. 6.0 Lpm/ 1.5 gpm laminar flow rate. Supplied 6VDC plug in transformer included. Easy topmount installation. Automatic anti-vandal timeout. Certified to ASME A112.18.1 / CSA B125.

Overall dimensions **2 x 7 1/4 x 11"**

\$ 859

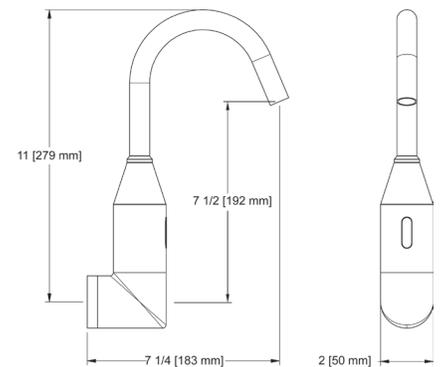

Hardwire kit for HHF180-series faucets 27811170


Power up to 6 faucets with one transformer. 100-240V 50/60Hz 0.8A input. Output is 6VDC 2.0A.

Class II cULus approved.

Transformer cable length **60"** (1500mm).

Wye cable length **60"** (1500mm) with **11 3/4"** (300mm) branch to each control box.

\$ 348

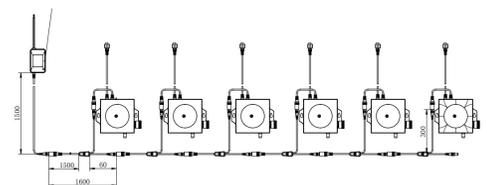

Washroom accessories




Back rest CM-16104

Back rest for wall mount toilet. Stainless steel bar with #4 satin finish with flanges and covers, with antique white solid core plastic laminate panel back. Concealed snap flanges and mounting hardware included. Provide adequate backing in wall for support and comply to local codes for barrier free requirement.

Dimensions **8 5/8 x 12 x 4"**

\$ 790

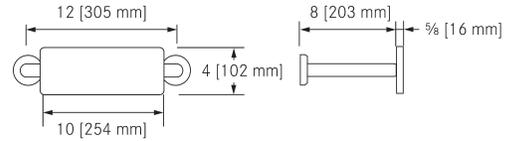


Back rest, for standard installations CM-16104-WM

Back rest for wall mount toilet for industry standard spud location. Stainless steel bar has #4 satin finish with flanges and covers, with antique white solid core plastic laminate panel back. Concealed snap flanges and mounting hardware included. Provide adequate backing in wall for support and comply to local codes for barrier free requirement.

Dimensions **6 x 12 x 4"**

\$ 790

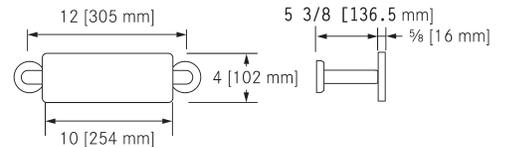

Aqua-foam soap dispensers





Foam soap dispenser, wall mount

Polished finish with light ring

SD01-001CFL

Stainless steel touch-free soap dispenser. AC powered (plug in) LED status light to notify of sensor blockage, soap level or if the wrong type of soap is used. Soap dispenser will dispense once every 48 hours if there is no action in between to avoid a clog in the tip. 1.5 liter (50 fl oz.) easy refill soap tank included. Overall dimensions **4¹⁵/₁₆ x 1 x 1"**

\$ 694

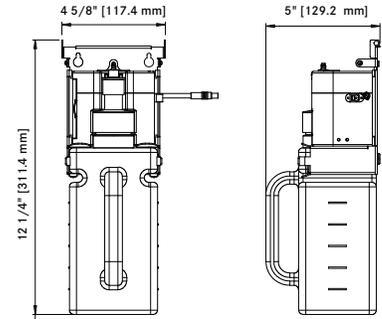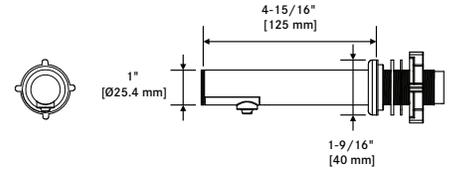

Foam soap dispenser, wall mount

Satin finish with light ring

SD01-001SFL

\$ 680





Foam soap dispenser, deck mount

Polished finish with light ring

SD01-003CFL

Stainless steel touch-free soap dispenser. AC powered (plug in) LED status light to notify of sensor blockage, soap level or if the wrong type of soap is used. Soap dispenser will dispense once every 48 hours if there is no action in between to avoid a clog in the tip. 1.5 liter (50 fl oz.) easy refill soap tank included. Overall dimensions **5⁹/₁₆ x 1 x 6⁵/₈"**

\$ 709

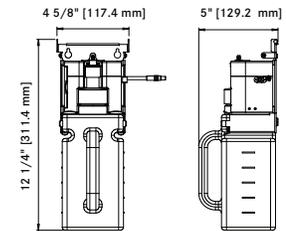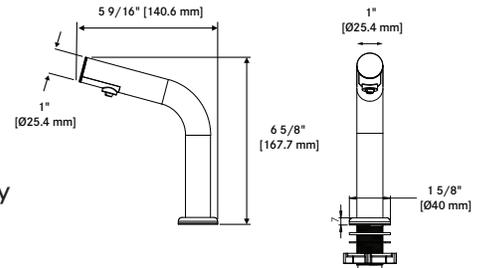

Foam soap dispenser, deck mount

Satin finish with light ring

SD01-003SFL

\$ 723





Foam soap dispenser, deck mount

SD01-002CF

Stainless steel touch-free soap dispenser. Requires either AC power or DC battery power to operate the soap dispenser. Soap dispenser will dispense once every 48 hours if there is no action in between to avoid a clog in the tip. 1.5 liter (50 fl oz.) easy refill soap tank included. Overall dimensions **5³/₈ x 1¹/₂ x 3¹³/₁₆"**

\$ 612

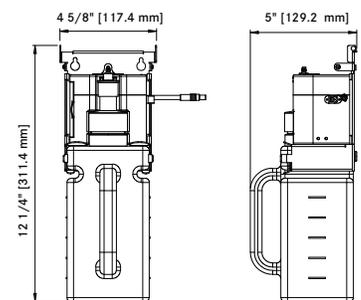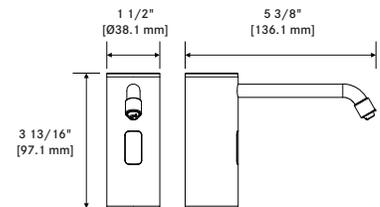

Foam soap dispenser, deck mount

Satin finish

SD01-002SF

\$ 506

Aqua-foam soap dispensers - multifeed



Model SD01-001 shown




Model SD01-003 shown



Model SD01-002 shown

Stainless steel touch-free soap dispenser unit as part of multifeed tank system. Ideal for high-traffic environments including airports, bus terminals, and other public spaces. Multi-feed model, up to six (6) units may be fed from a single multifeed tank. SD01-MFT sold separately, see below. Multifeed soap dispenser is sold with wall mount motor unit. Requires either AC power or DC battery power to operate the soap dispenser. Soap dispenser will dispense once every 48 hours if there is no action in between to avoid a clog in the tip.

Soap pump mechanism included with every multifeed soap dispenser unit. SD01-MFT tank sold separately.

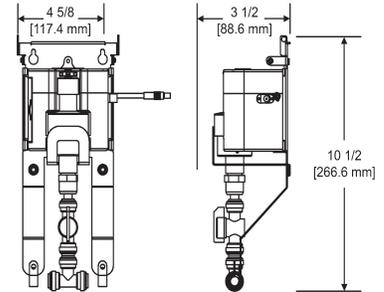


MODEL	DESCRIPTION	Overall Dimensions			FINISH	MOUNTING TYPE	PRICE
		FRONT-BACK	LEFT-RIGHT	HEIGHT			
SD01-001CFL-MF	Wall mount multifeed dispenser with light ring, polished	4 15/16" (125 mm)	1" (25 mm)	1" (25 mm)	High polish	WALL	\$ 624
SD01-001SFL-MF	Wall mount multifeed dispenser with light ring, satin finish	4 15/16" (125 mm)	1" (25 mm)	1" (25 mm)	Satin	WALL	\$ 609
SD01-003CFL-MF	Deck mount, curved multifeed dispenser with light ring, polished	5 9/16" (141 mm)	1" (25 mm)	6 5/8" (168 mm)	High polish	DECK	\$ 636
SD01-003SFL-MF	Deck mount, curved multifeed dispenser with light ring, satin finish	5 9/16" (141 mm)	1" (25 mm)	6 5/8" (168 mm)	Satin	DECK	\$ 653
SD01-002CF-MF	Deck mount multifeed dispenser, polished	5 3/8" (136 mm)	1 1/2" (38 mm)	3 13/16" (97 mm)	High polish	DECK	\$ 537
SD01-002SF-MF	Deck mount multifeed dispenser, satin finish	5 3/8" (136 mm)	1 1/2" (38 mm)	3 13/16" (97 mm)	Satin	DECK	\$ 521

Aqua-foam multifeed soap dispenser tank, 6L SD01-MFT

Wall mounted commercial, multi-fed foam soap dispenser model can supply up to 6 dispensers. 6 litre capacity (1.6 gallons) for foam soap. Only for use with the multifeed models Franke Aqua-foam soap dispensers, in table above with suffix -MF. 6VDC plug in transformer supplied per tank. Fills through opening in countertop. Flange with LED light ring and wall mounting brackets included. LED light ring on fill cap alerts low soap conditions at a glance. During filling, an audible melody will play to alert filling is complete. Overall dimensions **7 3/8" x 7 1/4" x 13 7/8"**

\$ 462

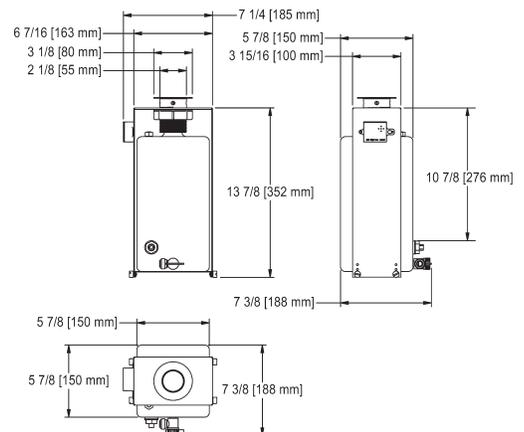

Drain Parts & Fittings



Pictured: 1140G grid accessory installed on 1140 strainer assembly

3 1/2" (89 mm) waste fittings



Stainless steel basket strainer 1140

3 1/2" (89 mm) all metal basket strainer assembly. Type 304 stainless steel construction complete with 1 1/2 x 3" (38 x 76 mm) stainless steel tailpiece. Pull up crumb cup. Certified to ASME A112.18.2-2005/CSA B125.2-2005.

\$ 40



Stainless steel grid strainer accessory, type 316, vandal-resistant 1140G

Grid accessory for 3 1/2" (89 mm) basket strainer. Replaces crumb cup on 1140, 1140F-316 or the 1120-316 waste assembly to create a vandal-resistant grid waste assembly. Type 316 stainless steel construction. Certified to ASME A112.18.2-2005/CSA B125.2-2005.

\$ 44



Stainless steel basket strainer, type 316 1140F-316

3 1/2" (89 mm) basket strainer in type 316 stainless steel construction, with 1 1/2 x 3" (38 x 76 mm) Type 316 stainless steel tailpiece. Pull up crumb cup. Certified to ASME A112.18.2-2005/CSA B125.2-2005.

\$ 132

1 1/2" (38 mm) waste fittings



Duplex waste with rubber stopper
100

1 1/2" (38 mm) DN38 duplex stainless steel waste complete with 1 1/2 x 3" (38 x 76 mm) brass tailpiece. Rubber stopper with pull up ring.

\$ 21



Duplex waste in type 316 stainless steel with rubber stopper
200-316

1 1/2" (38 mm) DN38 duplex type 316 stainless steel waste complete with 1 1/2 x 3" (38 x 76 mm) type 316 stainless steel tailpiece. Rubber stopper with pull up ring.

\$ 59



Stainless steel grid strainer
100-NR

1 1/2" (38 mm) vandal-resistant grid waste fitting, type 302 stainless steel, complete with with 1 1/2 x 3" (38 x 76 mm) stainless steel tailpiece.

\$ 151



Integral waste assembly, type 316
1047

1 1/2" (38 mm) integral waste assembly. Complete with type 316 stainless steel shank, shank gasket, brass shank nut, brass tailpiece nut, and nylon tailpiece gasket.

\$ 30



Integral waste cover for 1 1/2" (38mm) drain
100-1-302

1 1/2" (38 mm) perforated stainless steel grid waste cover for 1 1/2" drain.

\$ 29



Stainless steel standpipe, 10" long
310-1

Standpipe for 1 1/2" (38 mm) waste in type 304 stainless steel. 10" (254 mm) long.

\$ 53

1 1/4" (32 mm) waste fittings



Grid strainer with overflow
3700

1 1/4" (32 mm) grid strainer with overflow and removable tailpiece. Certified to ASME A112.18.2-2005/CSA B125.2-2005.

\$ 70



Grid strainer no overflow
3719

1 1/4" (32 mm) grid strainer with removable tailpiece. Certified to ASME A112.18.2-2005/CSA B125.2-2005.

\$ 70

Drain Parts & Fittings



Type 316 stainless steel tailpiece
315-9-316

1 1/2 x 3" (38 x 76 mm) type 316 stainless steel tailpiece.

\$ 28



Specialty waste fitting, drain cover
WHB5222-PW

Replacement stainless steel pyramid-shaped waste cover for WHB5222-7 basin.

\$ 103

Custom solutions



Full custom fabrication capabilities: No minimum order

Franke Commercial will custom fabricate products to meet our customers' exact specifications. Modifications can be made to most of our standard catalogue products.

All our custom fabricated products are polished to a #4 satin finish and can be made to meet the material specification you require (T304 or T316, 14 to 18 gauge). Continuous weld construction is available for pharmaceutical applications, if required.

Contact us for a quote:

- Countertops
- Topmount & Undermount Sinks
- Drainboard Sinks
- Scullery Sinks
- Wall Mount Hand Wash Stations
- Surgical Scrub Stations
- Mop Sinks
- Wall Mounted Utility Sinks



Some customers require a sink, basin, or countertop that is different from our catalog offering. This is why Franke Commercial is proud to offer custom stainless steel solutions for our customers. If you can sketch it, we can build it using our decades of experience and the quality you expect from Franke.



It starts with a sheet of stainless steel

We will cut, form, weld and finish it to your exact specifications. Give us the material specifications, written spec or drawing, and Franke will deliver a certified high-quality product.

Sinks with integrated countertops

Tops are available in any size and length.
Sink bowl welded into countertop.



Custom-sized sinks

We have worked with architects, designers, and engineers for decades to bring their unique designs to life.

Scullery & utility

Tailor made bowl size, height, backsplash style, drainboards, and sink edge types.

Healthcare & pharmaceutical


Continuous weld construction available upon specification. Custom made products that meet or exceed national healthcare standards.

Get a quote within 48hrs


Delivered from our Canadian facility in 8 to 10 weeks' time. Need it faster? Email us at: commercial-info.ca@franke.com

Standard hole drillings for topmount stainless steel sinks


Single bowl



-1
1 hole




-2
2 hole, 4" centerset




-3
3 hole, 8" centerset


Double bowl

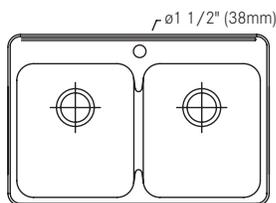

-1
1 hole

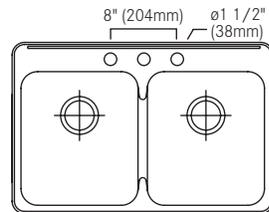


-3
3 hole, 8" centerset

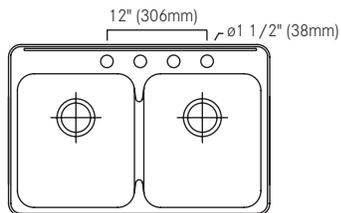


-4
3 hole, 8" centerset, plus 1 hole 4" to the right

Triple bowl

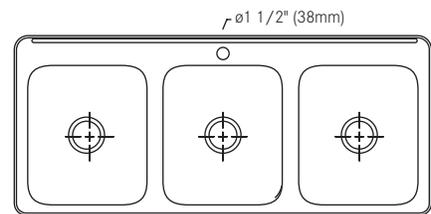

-1
1 hole

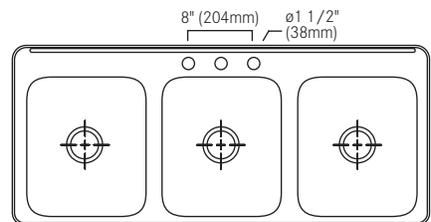

-3
3 hole, 8" centerset

Care & Maintenance for Stainless Steel Sinks

WHAT TO DO

Brushes with natural or plastic bristles, cotton or synthetic or micro fibre clothes, leather, sponges, pressure washer, vapour stream cleaner, toothpaste, household and window-cleaning products and natural cleaning substances like diluted vinegar (20 % vinegar / 80 % water) are ideal for cleaning stainless steel.

The best form of maintenance is frequent, regular cleanings. The best method of preventative maintenance is to ensure that the fixture is clean, dry and exposed to room atmosphere when not in use. Rinse and towel dry the fixtures daily in order to minimize major cleanups. This is of particular importance if potentially corrosive chemicals have been used.

Keep the fixture free of any standing water, which may build up mineral deposits. The quality of your water can affect the appearance and this water quality will vary from building to building.

To clean your stainless product, use the mildest cleaning procedure that will do the job effectively. On mirror finish (shiny) products we recommend using either a liquid detergent or Peek™ with a soft cloth. **DO NOT USE ABRASIVE MATERIALS ON THE MIRROR FINISH.** On satin (matte) finishes and/or inside sink bowls we recommend using a very mild abrasive cleanser such as Old Dutch® or Cameo®.


Any cleaning or scrubbing to remove stubborn stains should follow the direction of the grain line. Any scrubbing across the grain will show as a scratch. Scrubbing in the same direction as the polish lines will blend in any surface scratch. We recommend that Scotch-Brite® pads be used only on satin finishes.

Stains and water spots anywhere on the product can be removed with a small amount of Peek™ on a damp cloth. Rub Peek™ over the surface. Always rinse after using a cleaning agent, and wipe dry to discourage any water spotting.

WHAT NOT TO DO

We recommend that you do not use chlorine bleach to clean stainless steel, as chlorine will attack the protective layer that makes stainless steel truly stainless. The risk of damage is proportional to the concentration of the chlorine and the duration of exposure between the fixture and chlorine agent. Always dilute any antibacterial product used and wipe up any spills. Note: some antibacterial soaps contain a chlorine compound.

The unique properties of stainless steel are dependent upon exposure of the surface to the atmosphere. Do not leave any utensils in a sink overnight, as they will trap water underneath or leave a residue of small iron particles which could lead to staining and discoloration of the surface. They may not even be readily visible, but they most certainly will lead to corrosion. Any signs of rust can be removed with non-metallic Scotch-Brite® scouring pads, but do not scrub across the grain. For similar reasons do not leave any mild steel, or cast iron cookware or implements, anywhere on a stainless steel surface for extended periods of time. Steel wool, metallic scouring pads, abrasive, grinding and polishing powder as well as sand paper should never be used on a stainless steel surface as they can damage or scratch it.

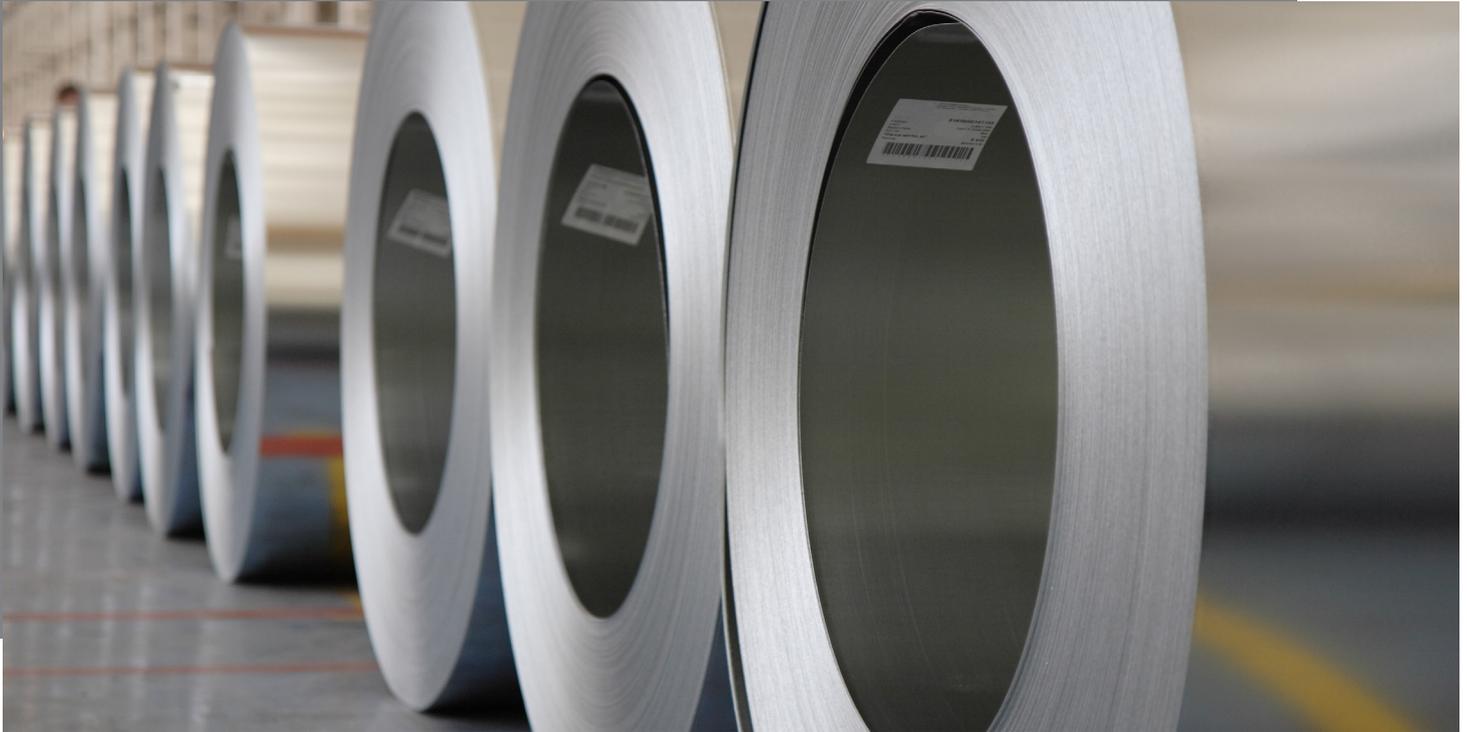

STAINLESS STEEL CORROSION RESISTANCE

20 GAUGE

18-8 stainless steel, Type 301

A good quality steel with 18% chromium and 8% nickel content. This type of stainless steel is typically used for sinks that are 8" deep or less.

18 GAUGE

18-10 stainless steel, Type 304

A heavier weight stainless with 18% chromium, and 10% nickel. This type of stainless steel is optimal for manufacturing deeper sink bowls.

16 & 14 GAUGE

Type 304

Most often used in fabrication of institutional sinks such as kitchen sculleries, wallmount utility sinks, as well as mop and service sinks.

BOWL AND DECK FINISHES

With the exception of vanity basins, the Franke Commercial sink bowls have a #4 satin finish. A satin finish has a noticeable grain line on the inside of the bowl. This type of finish is practical, particularly in a heavy use application, as any scratches may be blended into the grain line.

The #4 satin finish deck will stand up to the rigours of time and repeated use, and the natural grain of the steel will disguise any scratches acquired from use.



Stainless steel corrosion resistance information

Substance, Conditions, Strength and Temperature	T316	T304	T301
Acetic Anhydride (90%, aerated, 180 degrees F)	B	C	C
Aluminum Fluoride (5%, 70 degrees F)	B	C	C
Aluminum Sulfate (10%, boiling)	A	B	B
Ammonium Bromide (5%, 70 degrees F)	B	C	C
Ammonium Sulfate (10%, boiling)	A	B	B
Bleaching Powder (dry)	A	C	C
Butyric Acid (saturated, boiling)	A	B	B
Calcium Bisulfite (aqueous solution, 300 lbs. pressure, 390 degrees F)	B	C	C
Calcium Hydroxide (50%, boiling)	B	C	C
Calcium Hypochlorite (saturated, 70 degrees F)	A	C	C
Chloroacetic Acid (70 degrees F)	B	C	C
Chlorine Gas (moist, 70 degrees F)	B	C	C
Chromic Acid (50%, boiling)	B	C	C
Ferric Chloride 1%, 70 degrees F)	B	C	C
Fluosilicic Acid 90%, 70 degrees F)	B	C	C
Formic Acid (10%, 180 degrees F)	A	C	C
Hydrochloric Acid (1% or less, 70 degrees F)	B	C	C
Iodine (dry, 70 degrees F)	A	C	C
Lactic Acid (10%, 150 degrees F)	B	C	C
Mercuric Chloride (2%, 70 degrees F)	B	C	C
Oxalic Acid (2.5%, 180 degrees F)	A	C	C
Phosphoric Acid (80%, 230 degrees F)	B	C	C
Salt Brine (70 degrees F)	A	C	C
Sauerkraut Brine (70 degrees F)	A	C	C
Sodium Hydroxide (melting, 600 degrees F)	B	C	C
Stannic Chloride (5%, 70 degrees F)	B	C	C
Sulfuric Acid (5%, 100 degrees F)	A	C	C
Zinc Chloride (saturated, 70 degrees F)	B	C	C

CHEMICAL DATA

A = fully resistant, **B** = fairly resistant, **C** = not resistant. The chemical data above should be used as a guide to determine the type of stainless steel that will be appropriate for the application. The rating system denotes the level of resistance to corrosion for the different types of stainless steel. For applications involving chemicals or conditions not listed, please consult Franke Commercial customer service.

Corrosion, or rusting, often reported soon after installation, has two main causes:

1. Contact Corrosion occurs when a piece of common carbon steel, copper, brass or other foreign material contacts the sink and destroys the passive protective film.
2. Pitting or Pinhole Corrosion occurs when chlorides attack the steel forming pits where galvanic cells are created. Acid chlorides are particularly severe, but even chlorine bleach can cause failure. The sink should be rinsed thoroughly after such contact. Type 316 steel should be specified if the sink will be subject to such conditions.

In the presence of oxygen, stainless steel forms a protective chromium oxide layer. This is due to the addition of chromium in excess of 11.5% during the alloying stage. The further addition of nickel, in excess of 7%, gives superior corrosion resistance to the 300 series.

Maximum corrosion resistance is obtained with the addition of molybdenum to form TYPE 316, designed to resist attack under highly corrosive conditions.



As implied, stainless steel requires oxygen in order to be stainless. There are ways to make oxygen more plentiful. For example, an acid solution which might otherwise corrode the steel, can be aerated to maintain the protective film.

Index

100.....	73.....	21	FSS151509-316-1.....	18.....	4537	LBS6407-316P-1.....	14.....	1046
1047.....	73.....	30	FSS151509-316-1.....	35.....	4537	LBS6408P-1.....	6.....	832
1140.....	72.....	40	FSS2210-316-1.....	19.....	9056	LBS6410PCB-1.....	6.....	1023
3700.....	74.....	70	FSS2210-316-1.....	35.....	9056	LBS6807-1.....	5.....	549
3719.....	74.....	70	FSS222210-316-1.....	18.....	6176	LBS6807-2.....	5.....	629
27811170.....	68.....	348	FSS222210-316-1.....	35.....	6176	LBS6807-316P-1.....	14.....	1065
100-1-302.....	73.....	29	FSSL223410-316-1.....	18.....	7891	LBS6808-1.....	5.....	604
100-NR.....	73.....	151	FSSL223410-316-1...	35.....	7891	LBS6808-2.....	5.....	669
1140F-316.....	72.....	132	FSSO2210-316-1.....	19.....	9056	LBS6808-316P-1.....	14.....	1174
1140G.....	72.....	44	FSSO2210-316-1.....	35.....	9056	LBS6808P-1.....	6.....	922
200-316.....	73.....	59	FSSOL223410-316-1.....	19.....	9290	LBS6810-1.....	5.....	791
310-1.....	73.....	53	FSSOL223410-316-1...	35.....	9290	LBS6810-316P-1.....	14.....	1240
315-9-316.....	74.....	28	FSSOR223410-316-1.....	19.....	9290	LBS6810P-1.....	6.....	1122
AHWSS1720W-00....	48.....	1780	FSSOR223410-316-1...	35.....	9290	LBS7308-1.....	5.....	652
AHWSS1720W-G.....	49.....	1956	FSSR223410-316-1...	18.....	7891	LBS7308P-1.....	6.....	958
AHWSS2321WDM-00.	50.....	2153	FSSR223410-316-1..	35.....	7891	LBS7310P-1.....	6.....	1216
AHWSS2321WDM-G....	50.....	2445	HHF180-6L.....	68.....	780	LBS7312P-1.....	6.....	1341
ALBD4405P-1.....	7.....	1473	HHF180-6L-W.....	68.....	859	LBS7314P-1.....	6.....	2587
ALBD4406P-1.....	7.....	1473	HHF23T.....	68.....	775	LBS7508-1.....	5.....	561
ALBD6405-1.....	7.....	575	HWF05.....	46.....	3456	LBS7508P-1.....	6.....	842
ALBD6405P-1.....	7.....	1495	HWF23.....	46.....	3493	LBS7808P-1.....	6.....	1130
ALBD6406P-1.....	7.....	1495	HWF43.....	46.....	3681	LBS9106-1.....	5.....	433
ALBD7506P-1.....	7.....	1473	HWS0610P-3.....	56.....	802	LBSDL6408P-1.....	9.....	2752
ALBDC182605P-1.....	7.....	1142	HWS1414P-00.....	54.....	2393	LBSDL6810-316P-1..	15.....	3813
ALBS1306P-1.....	6.....	813	HWS1420P-00.....	55.....	3872	LBSDL6810P-1.....	9.....	2834
ALBS2706P-1.....	6.....	888	HWS6810P-3.....	56.....	1073	LBSDBR6408P-1.....	9.....	2752
ALBS4006P-1.....	6.....	965	HWS-RS-00.....	54.....	373	LBSDBR6810-316P-1.15	3813
ALBS4406P-1.....	6.....	828	HWSS1518P-00.....	54.....	2254	LBSDBR6810P-1.....	9.....	2834
ALBS4406P-1.....	6.....	988	HWSS2321W-00.....	45.....	4224	LBT6407CB-1.....	8.....	1074
ALBS4605P-1.....	6.....	988	IWC2104.....	47.....	370	LBT6410PCB-1.....	8.....	2552
ALBS4606P-1.....	6.....	988	IWC2203.....	55.....	370	LBT8610P-1.....	8.....	3304
ALBS6106P-1.....	6.....	1088	LBD4408P-1.....	7.....	1402	MEDI-MIX.....	47.....	258
ALBS6406P-1.....	6.....	873	LBD6407-1.....	7.....	931	MEDI-SHR.....	47.....	348
ALBS6805-1.....	5.....	553	LBD6408-1.....	7.....	931	MIX-LF.....	67.....	258
ALBS6805P-1.....	6.....	969	LBD6408-316P-1.....	14.....	1790	OC6-316.....	17.....	500
ALBS6806P-1.....	6.....	969	LBD6408P-1.....	7.....	1424	OV1317U-5.....	43.....	894
ALBS7306P-1.....	6.....	1007	LBD6410-316PCB-1..	14.....	2128	OV1418-6.....	39.....	711
ALBS7506P-1.....	6.....	886	LBD6410PCB-1.....	7.....	1777	OV1420U-5.....	43.....	1117
ALBS7806P-1.....	6.....	1344	LBD7508-1.....	7.....	597	OV1619-5-1.....	40.....	716
ART36-1.....	11.....	2502	LBD7508P-1.....	7.....	1430	OV1619-5-3.....	40.....	716
ART36-316-1.....	16.....	3258	LBD7510P-1.....	7.....	1623	OV1619-6-1.....	40.....	725
ART36-316-3C.....	16.....	3258	LBDDBL6408P-1.....	9.....	3522	OV1619-6-3.....	40.....	725
ART48-1.....	11.....	2790	LBDDBR6408P-1.....	9.....	3522	OV17-6.....	39.....	686
ART48-316-1.....	16.....	3578	LBS1306-1.....	5.....	372	OV1821-5-1.....	41.....	765
ART48-316-3C.....	16.....	3578	LBS1308P-1.....	6.....	778	OV1821-5-3.....	41.....	765
ART60-1.....	11.....	2976	LBS2708-1.....	5.....	586	OV1821-6-1.....	41.....	848
ART60-316-1.....	16.....	3894	LBS2708P-1.....	6.....	856	OV1821-6-3.....	41.....	848
ART60-316-3C.....	16.....	3894	LBS4008P-1.....	6.....	919	OWB1420U-5.....	42.....	1235
AT02-005AC.....	67.....	1298	LBS4010P-1.....	6.....	1071	PWS-50.....	36.....
AT02-005DC.....	67.....	1352	LBS4408P-1.....	6.....	843	RDL2436-1.....	30.....	7619
AWHB1414P-3.....	55.....	6760	LBS4607-1.....	5.....	498	RDL2436L-1.....	30.....	8794
AWHB2220W-3-1....	59.....	1488	LBS4607-316P-1.....	14.....	958	RDL2436LR-1.....	30.....	9972
AWHBS2419-7.....	58.....	1769	LBS4608P-1.....	6.....	963	RDL2436R-1.....	30.....	8794
CL-DB.....	25.....	1130	LBS4610-316P-1.....	14.....	1163	RDL2448-1.....	30.....	8209
CM-16104.....	69.....	790	LBS4610P-1.....	6.....	1175	RDL2448L-1.....	30.....	9382
CM-16104-WM.....	69.....	790	LBS6108P-1.....	6.....	958	RDL2448LR-1.....	30.....	10559
DL2448-1.....	24.....	2443	LBS6110P-1.....	6.....	1313	RDL2448R-1.....	30.....	9382
DL2448-5.....	24.....	2587						

Index

RSL2418-1.....	29	5000	SSL2424L-1.....	26	6234	WDL2448LR-1.....	33	12162
RSL2418L-1.....	29	6179	SSL2424LR-1.....	26	6804	WDL2448R-1.....	33	10877
RSL2418LR-1.....	29	7355	SSL2424R-1.....	26	6234	WHB1616-3.....	62	992
RSL2418R-1.....	29	6179	SSS1827.....	22	13873	WHB1617-3.....	63	991
RSL2424-1.....	29	5266	SSS1827DDS.....	23	18424	WHB1617-316-3.....	17	1491
RSL2424L-1.....	29	6442	SSS1827SDSL.....	22	14908	WHB1617-7.....	63	914
RSL2424LR-1.....	29	7619	SSS1827SDSR.....	23	14908	WHB1716-3.....	65	983
RSL2424R-1.....	29	6442	SSU1-00.....	52	6707	WHB1716SPL-3.....	64	1027
RTL2454-1.....	31	11737	SSU1-10.....	53	7788	WHB1819-3.....	64	980
RTL2454L-1.....	31	12915	SSU1-2016-3.....	51	9868	WHB1819-316-3.....	17	1656
RTL2454LR-1.....	31	14090	SSU1-2020-3.....	51	10150	WHB1819-7.....	64	918
RTL2454R-1.....	31	12915	SSU2-00.....	52	7802	WHB2221-7.....	60	2133
RTL2472-1.....	31	12324	SSU2-10.....	53	9976	WHB2221-8.....	60	2279
RTL2472L-1.....	31	13502	SSU2-2040-3.....	51	13816	WHB2221-RS.....	60	312
RTL2472LR-1.....	31	14678	SSU3-00.....	52	16352	WHB2221-UC.....	60	313
RTL2472R-1.....	31	13502	SSU3-10.....	53	19146	WHB5222-7.....	58	3378
S6407-316P-1.....	13	1026	STL2454-1.....	28	9081	WHB5222-PW.....	74	103
S6408-1.....	4	491	STL2454L-1.....	28	10221	WHB5222-RS.....	58	296
S6410PCB-1.....	4	1062	STL2454LR-1.....	28	11358	WHBS181910-3.....	65	3871
S6808-1.....	4	559	STL2454R-1.....	28	10221	WSL2418-1.....	32	5744
S6808-316P-1.....	13	1028	STL2472-1.....	28	11927	WSL2418L-1.....	32	7028
S6810-1.....	4	684	STL2472L-1.....	28	13068	WSL2418LR-1.....	32	8311
S6810-316P-1.....	13	1303	STL2472LR-1.....	28	14203	WSL2418R-1.....	32	7028
SD01-001CFL.....	70	694	STL2472R-1.....	28	13068	WSL2424-1.....	32	6386
SD01-001CFL-MF.....	71	624	TL2454-1.....	25	3593	WSL2424L-1.....	32	7669
SD01-001SFL.....	70	680	TL2454-5.....	25	3736	WSL2424LR-1.....	32	8952
SD01-001SFL-MF.....	71	609	TL2472-1.....	25	4454	WSL2424R-1.....	32	7669
SD01-002CF.....	70	612	TL2472-5.....	25	4599	WSS6713.....	65	6245
SD01-002CF-MF.....	71	537	UCD6405P-1.....	10	806	WT310E-7.....	61	822
SD01-002SF.....	70	506	UCD6408P-1.....	10	844	WT400C-7.....	61	1078
SD01-002SF-MF.....	71	521	UCS4608-316P-1.....	15	958	WT500C-7.....	61	1209
SD01-003CFL.....	70	709	UCS6105P-1.....	10	691	WT600C-7.....	62	1307
SD01-003CFL-MF.....	71	636	UCS6805P-1.....	10	625	WTL2454-1.....	34	14086
SD01-003SFL.....	70	723	UCS6808-316P-1.....	15	1021	WTL2454L-1.....	34	15369
SD01-003SFL-MF.....	71	653	UCS6808P-1.....	10	660	WTL2454LR-1.....	34	16654
SD01-MFT.....	71	462	UCS6810-316P-1.....	15	1078	WTL2454R-1.....	34	15369
SDL2436-1.....	27	7374	V1114-5.....	39	418	WTL2472-1.....	34	14728
SDL2436L-1.....	27	8510	V1114-5D.....	39	489	WTL2472L-1.....	34	16014
SDL2436LR-1.....	27	9652	V1418-6.....	39	539	WTL2472LR-1.....	34	17296
SDL2436R-1.....	27	8510	V1619-5-1.....	40	711	WTL2472R-1.....	34	16014
SDL2448-1.....	27	7941	V1619-5-3.....	40	711	WT-RS.....	62	735
SDL2448L-1.....	27	9081	V1619-6-1.....	40	720	WTS2025-1.....	21	3631
SDL2448LR-1.....	27	10221	V1619-6-3.....	40	720	WTS2031-1.....	21	3813
SDL2448R-1.....	27	9081	V17-5.....	39	566	WTS2036-1.....	21	4692
SL2424-1.....	24	1580	V17-6.....	39	637	WTS2048-1.....	21	4867
SL2424-316-1.....	16	5867	V1821-5-1.....	41	740	WTS2060-1.....	21	5164
SL2424-316-5.....	16	6183	V1821-5-3.....	41	740	WTS2072-1.....	21	5419
SL2424-5.....	24	1725	V1821-6-1.....	41	786	WTS2096-1.....	21	5870
SL2448-1.....	24	2443	V1821-6-3.....	41	786	WTS36-1.....	21	4265
SL2448-316-1.....	16	8879	WB1119U-5.....	42	1348	WTS48-1.....	21	4425
SL2448-316-5.....	16	9671	WB1420U-5.....	42	1239	WTS60-1.....	21	4694
SL2448-5.....	24	2587	WDL2436-1.....	33	8952	WTS72-1.....	21	4928
SSL2418-1.....	26	4526	WDL2436L-1.....	33	10236			
SSL2418L-1.....	26	5666	WDL2436LR-1.....	33	11521			
SSL2418LR-1.....	26	6804	WDL2436R-1.....	33	10236			
SSL2418R-1.....	26	5666	WDL2448-1.....	33	9596			
SSL2424-1.....	26	5097	WDL2448L-1.....	33	10877			

Terms & Conditions & Warranty

Our General Terms and Conditions of Sale are exclusively applicable to the sale and delivery of our products. The respective valid version is available on:

<https://www.franke.com/ca/en/home-solutions/general-terms-and-conditions-of-sale.html>



FRANKE HOME SOLUTIONS WARRANTY EFFECTIVE SEPTEMBER 1, 2022

In the United States, Canada and Latin America, Franke warrants the products from manufacturing defects in material and workmanship when purchased from Franke or a Franke Authorized Retailer pursuant to product-specific warranties detailed herein (each, a “Warranty” and collectively, the “Warranties”). The products must be properly installed, per company’s installations instructions, in its original installation, and used in normal indoor residential kitchen applications. Any products or components which have been modified or altered, from its original intended condition will void the warranty. The Franke Warranties are limited to the original purchaser and are non-transferrable. These Warranties do not include products purchased from non-Authorized Retailers, products that are obsolete or discontinued, or products that were previous display models. All issues with installed products are considered warranty claims and not subject to the Return Policy. Franke reserves the right to inspect any product reported to be defective and the original installation prior to providing a replacement product and/or component. All decisions are final. In no situation shall the liability of Franke exceed the amount of the original purchase price.

The Warranties do not cover, and Franke shall not be liable for, any damage to products or components resulting from misuse or abuse, accidental damages, normal wear such as scuffs, scratches or finish reduction/fading; improper installation, abnormal usage, negligence, damage caused by improper maintenance or cleaning. Damage caused by impurities, corrosive chemicals or acts beyond Franke’s control are not covered by any Warranty.

Franke product replacements do not include transportation, shipping, diagnosis, labor, installation, removal, disposal for any products or liability for project delays. Product replacements are not guaranteed to be exact replacements. The owner of a product is liable for any transportation and re-installation costs related to any warranty for such product. If the original product is not available at the time of the warranty claim, at Franke’s option, the product replacements will be of similar size, material, and value. Any products or components which have been modified or altered, from its original intended condition will void the warranty.

The Warranties do not allow recovery of incidental or consequential damages such as loss of use, delay, property damage or other consequential damage, and Franke accepts no liability for such damages. Each Warranty is limited to the conditions set forth herein and to the applicable warranty period specified herein and is exclusive. EXCEPT FOR THE WARRANTIES SET FORTH HEREIN, FRANKE MAKES NO WARRANTY WHATSOEVER WITH RESPECT TO THE PRODUCTS, INCLUDING, BUT NOT LIMITED TO, (1) ANY WARRANTY OF MERCHANTABILITY, (2) WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, (3) WARRANTY OF TITLE, OR (4) WARRANTY AGAINST INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS OF A THIRD PARTY, WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE. LEGAL DISCLAIMER PLEASE READ CAREFULLY. Franke Home Solutions North America, LLC/Franke Kindred Canada Limited provides the above information to you as a public service to our customers. By accessing and using this information, you agree to the following and to comply with all applicable laws. If you do not agree with these terms and conditions, do not use this information. While we try to keep the information current, changes may have occurred since its creation. Contact your Regional Manager or Customer Service to verify information regarding Franke Home Solutions North America, LLC/Franke Kindred Canada programs and their use by you.

Warranty

Every Franke Commercial product is guaranteed to be suitable for any normal purpose for which it is intended and without defects in material or workmanship for the following periods of time, provided it has been installed and maintained according to Franke Commercial instructions.

- Stainless steel topmount sinks, undermount, wall mount basins
 - 5 year warranty
- Stainless steel scullery sinks, mop and sewage sampling sinks
 - 1 year warranty
- Aquarius and Ozo-flo touch-free faucets
 - 5 year warranty on faucet body, cables & plug-in power supply (if equipped)
 - 1 year on solenoid valve
- HHF-series touch-free faucets
 - 1 year warranty on faucet body, cables & plug-in power supply (if equipped)
- Custom and fabricated products
 - 1 year warranty
- Drain fittings and waste parts
 - 1 year warranty
- Electronic water controls
 - 1 year warranty
- Solid surface wall hung sinks
 - 2 year warranty on sinks
 - 1 year warranty on electronics of Medi-flo
- Aqua-foam soap dispensers
 - 1 year warranty
- Drinking fountains, non-chilled
 - 1 year warranty
- Drinking fountains, chilled
 - 5 year warranty on sealed refrigerated systems
 - 1 year warranty on fountain part accessories

Pricing effective January 1, 2026



Franke Kindred Canada
1000 Franke Kindred Road
Midland, ON L4R 4K9
commercial-info.us@franke.com
franke.com

USA
[#CMCLCATUSEN26](#)