


KEM8SBPM-STN Chilled fountain | 213.0670.118

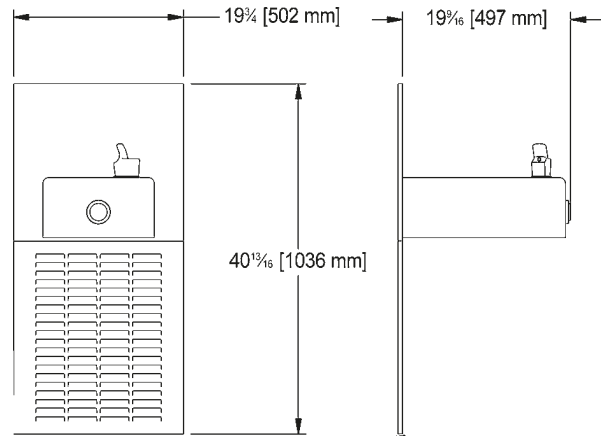

Single chilled stainless steel fountain. Heavy duty galvanized steel wall mounting frame with brushed stainless panels. Waterways are lead-free in materials and construction. Built-in 100 micron strainer stops particles before they enter the waterway. Free flow bubbler. Unit will comply with wheelchair accessibility when properly installed. Compressor is hermetically sealed, reciprocating type, single phase, lifetime lubrication. The condenser is cooled with a permanently lubricated fan motor. Stainless steel cooling tank with continuous copper tubing. Factory preset thermostat, easily accessible by removal of front panel. R134a refrigerant. Product Certified to NSF/ANSI Standard 61, Annex G (weighted average lead content of 0.25% or less). Models covered by this specification comply with all known Plumbing Codes. Listed by Underwriters' Laboratories to U.S. and Canadian standards. 8 gph chiller, with mechanical push button. Optional filter kit F041253-001. 19 9/16 x 19 3/4 x 40 13/16" Overall (FB x LR x H). 497 x 502 x 1036 mm Overall (FB x LR x H).

Product Dimensions

Overall front to back	19.567
Overall left to right	19.764
Overall height	40.787

Installation

Wall mounting type	Wall mounting
--------------------	---------------

Product specifications

Cooling capacity	8 gph
Outlet size	DN32 / 1 1/4"
Inlet size	DN10 / 3/8"
Input supply voltage Hz	60.0
Input supply voltage V	115.0
Motor power	500.0
Certification	CSA
Certification	UL
Certification	NSF

Product identification

Model	KEM8SBPM-STN
Brand	FRANKE
Product category	Drinking fountains
Drinking fountain type	Drinking fountains

Features

Cabinet finish	Brushed stainless
----------------	-------------------

Chilled	Yes
Type of operation	Manual
Drinking bubbler	Yes
Bottle filler included	No