
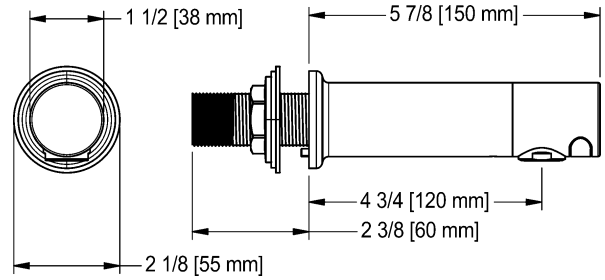


AT02-005DC-LF Wallmount faucet, low flow | 253.0221.375

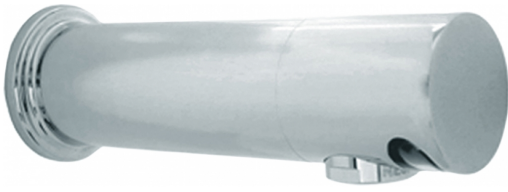

Aquarius hands-free commercial faucets are made for use in high demand, heavy traffic areas, where durability, reliability, and vandal resistance matter most. Aquarius faucets are easy to install, offer plug-in (AC) or battery (DC) power options, and contain highly intelligent electronic controls with programmable sensor ranges, run times, and automatic purging to eliminate stagnant water and help maintain outflow temperatures. Included with an optional anti-rotation pin for ease of installation and vandal resistance. Several helpful reporting features can also be accessed via an optional handheld controller. Included with an optional anti-rotation pin for ease of installation and vandal resistance. Manufactured from corrosion resistant Type 316 stainless steel in a high polished finish. Certified to ASME A112.18.1/CSA B125.1. AT02-005DC-LF, Low-flow model: water flow rate is 0.35 gpm (1.32 Lpm).

Product Dimensions

| | |
|-----------------------|-------|
| Overall front to back | 5.906 |
| Overall left to right | 2.165 |
| Overall height | 2.165 |
| Spout projection | 4.724 |

Installation

| | |
|-------------------|-------------|
| Installation type | Wallmounted |
|-------------------|-------------|

Product specifications

| | |
|-------------------------|------------------------|
| Type of material | Type 316 |
| Certification | cUPC |
| Surface finish | Polished stainless |
| Type of operation | Hands free |
| Type of sensor | Infrared |
| Type of mixing | MIX-LF sold separately |
| Type of faucet | Straight |
| Flow rate litres | 1.3 Lpm |
| Power supply connection | DC |

Product identification

| | |
|-------------------------------|----------------------|
| Model | AT02-005DC-LF |
| Brand | FRANKE |
| Product category | Washroom accessories |
| Washroom accessories category | Faucets |